


Specialty Modules

P3-HSI \$619.00

High-Speed Pulse Input The P3-HSI is a high-speed pulse (1MHz) input module that has both differential and single ended inputs. This module accepts Pulse/Direction and Quadrature signals on each of the two independent input channels. It also provides four general purpose high-speed inputs and four general purpose 5–24 VDC 0.5 amp, outputs.

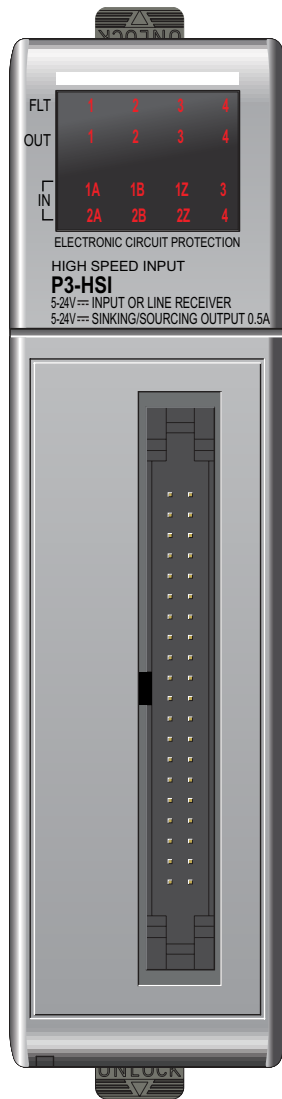

No terminal block sold for this module; ZIPLink required.

General Specifications	
Module Type	Intelligent
Modules per Base	11 Max
I/O Points Used	None, mapped directly to tags in CPU
Surrounding Air Temperature	0°C– 60°C (32°F–140°F)
Storage Temperature	-20°C–70°C (-4°F–158°F)
Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	IEC60068-2-6 (Test Fc)
Shock	IEC60068-2-27 (Test Ea)
Field to Logic Side Isolation	1800VAC applied for 1s
Insulation Resistance	>10MΩ @ 500VDC
Heat Dissipation	5.76 W
Enclosure Type	Open equipment
Emissions	EN61000-6-4 (Conducted and radiated RF emissions)
Module Keying to Backplane	Electronic
Module Location	Any I/O slot in any local, expansion, or remote base in a Productivity3000 system.
Field Wiring	Use ZIPLink wiring system. See Wiring Solutions.
Weight	113.4 g (4oz)
Agency Approvals	UL508 file E157382, Canada & USA CE (EN61131-2*)

*Meets EMC and Safety requirements. See the Declaration of Conformity for details.

Power Specifications	
External Power	24VDC +10%/-15%, Class 2
Maximum Voltage	26.4 VDC
Minimum Voltage	20.4 VDC
Current Consumption Excluding Outputs	47mA
Maximum Current Consumption Total of the 4 Status Outputs	2A

Connector Specifications	
Connector Type	IDC style header with latch, Omron XG4A-4034
Number of Pins	40 point
Pitch	0.1 in. (2.54 mm)

See Wiring Solutions for part numbers of ZIPLink cables and connection modules required with this I/O module.



NOTE: The most recent Productivity Suite software and firmware versions may be required to support new modules and new features.


Specialty Modules

P3-HSI (cont'd)

Single Ended (5-24V) Input Specifications	
Status Input	Single ended inputs (8 pts: 1A, 1B, 1Z, 2A, 2B, 2Z, 3IN, 4IN)
Isolation	Each input is isolated from other circuits
Input Volts Range	5–24 VDC
Input Volts Maximum	±34 VDC, limited by protection
Input Impedance	1k Ω min., 5k Ω max.
Inputs Rated Current	5–24 VDC, 16mA 5.2 mA typ. @ 5VDC 22mA max. @ 34VDC
Input Minimum ON Voltage	4.5 VDC
Input Maximum OFF Voltage	2.0 VDC
Input Minimum ON Current	5.0 mA
Input Maximum OFF Current	1.4 mA
OFF to ON Response Time	1A, 1B, 2A, 2B: 0.48 μ s 1Z, 2Z, 3IN, 4IN: 6 μ s
ON to OFF Response Time	1A, 1B, 2A, 2B: 0.48 μ s 1Z, 2Z, 3IN, 4IN: 6 μ s
Max. Input Frequency	1A, 1B, 2A, 2B: 200kHz* 1Z, 2Z, 3IN, 4IN: 200kHz*

* Inputs are not limited to this speed but single ended signals are not usually reliable above 200kHz due to cabling capacitance.

Status Inputs

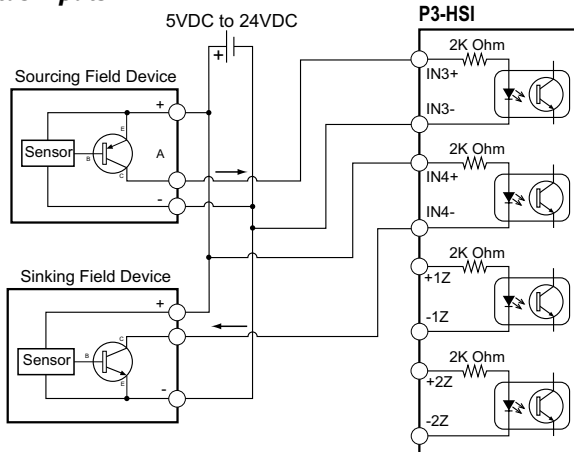


Differential (5V) Input Specifications	
Pulse Inputs	Differential inputs (6 pts: 1A, 1B, 1Z, 2A, 2B, 2Z)
Isolation	Each input is isolated from other circuits
Input Signal Type, per Channel Select	Differential
Input Volts	5VDC
Input Volts Maximum	±5.6 VDC, limited by protection
Input Impedance	200 Ω min., 500 Ω max.
Inputs Rated Current	5VDC, 15mA (8mA typ., 15mA max.)
Input Minimum ON Voltage	3.0 VDC
Input Maximum OFF Voltage	1.0 VDC
Input Minimum ON Current	5.0 mA
Input Maximum OFF Current	2.0 mA
OFF to ON Response Time	1A, 1B, 2A, 2B: 0.48 μ s 1Z, 2Z, 3IN, 4IN: 6 μ s
ON to OFF Response Time	1A, 1B, 2A, 2B: 0.48 μ s 1Z, 2Z, 3IN, 4IN: 6 μ s
Max. Input Frequency	1A, 1B, 2A, 2B: 1MHz 1Z, 2Z, 3IN, 4IN: 300kHz*

Status Output Specifications		
Status Outputs	4 Outputs	
Output Signal Type, per Output	Current Sinking	Current Sourcing
Operating Voltage ¹	5–24 VDC	5–24 VDC1
Output Volts Maximum	36VDC	26.4 VDC1
Output Current Maximum	500mA	500mA
Overcurrent Protection	Short circuit detect and current limit with automatic retry for each output	
Output Self Limiting Current	1.2 to 2.4 amps	
Max. Inrush Current	Self limited	
Output Voltage Drop	0.7 VDC @ 0.5 A	0.7 VDC @ 0.5 A
Thermal Protection	Independent over-temperature protection each output	
Output Voltage Clamp During Inductive Switching	+45VDC	-20VDC
Maximum OFF to ON Response	25ms ²	
Maximum ON to OFF Response	25ms ²	

Notes:

1. Operating voltage of current sourcing outputs must be no greater than external power.
2. Measured at 5VDC operating voltage, 0.5 A load current.

Status Outputs

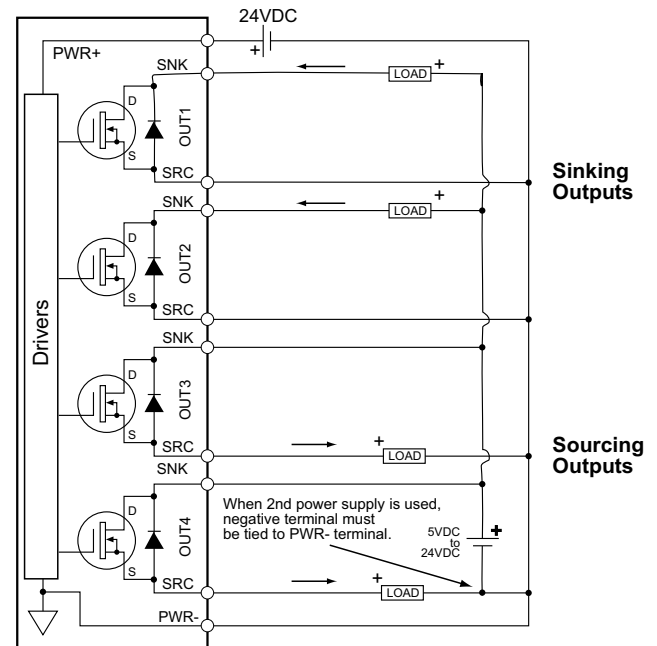

Note: The voltage difference between the input pairs must be between 3–5.6 volts.


* The Z pulse input (1Z & 2Z) is capable of capturing a 1 MHz wide pulse for the purpose of resetting an encoder count but a 3 microsecond pause (300kHz) is required between pulses.

Specialty Modules


P3-HSI (cont'd)

5V Encoder Inputs

To prevent damage to P3-HSI 5V inputs, do not exceed 6.8 V or 30mA on inputs 1A, $\overline{1A}$, 1B, $\overline{1B}$, 1Z, $\overline{1Z}$, 2A, $\overline{2A}$, 2B, $\overline{2B}$, 2Z, & $\overline{2Z}$.

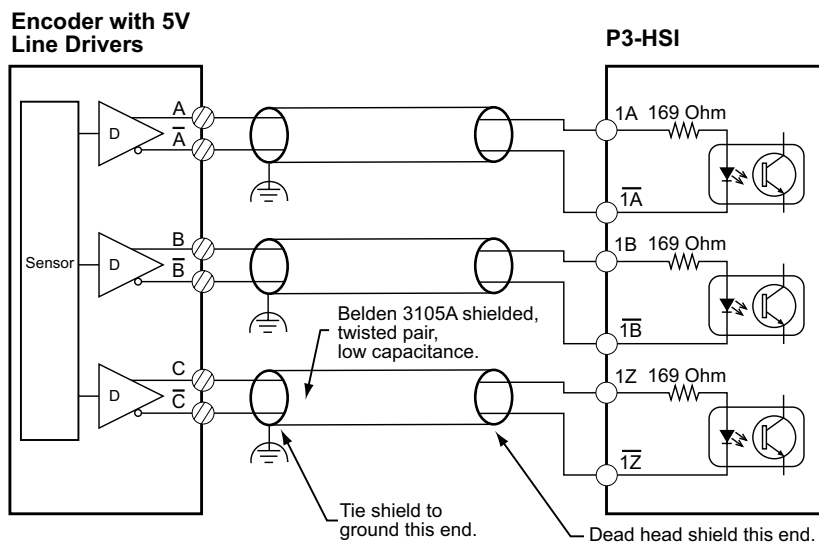

24V Encoder Inputs

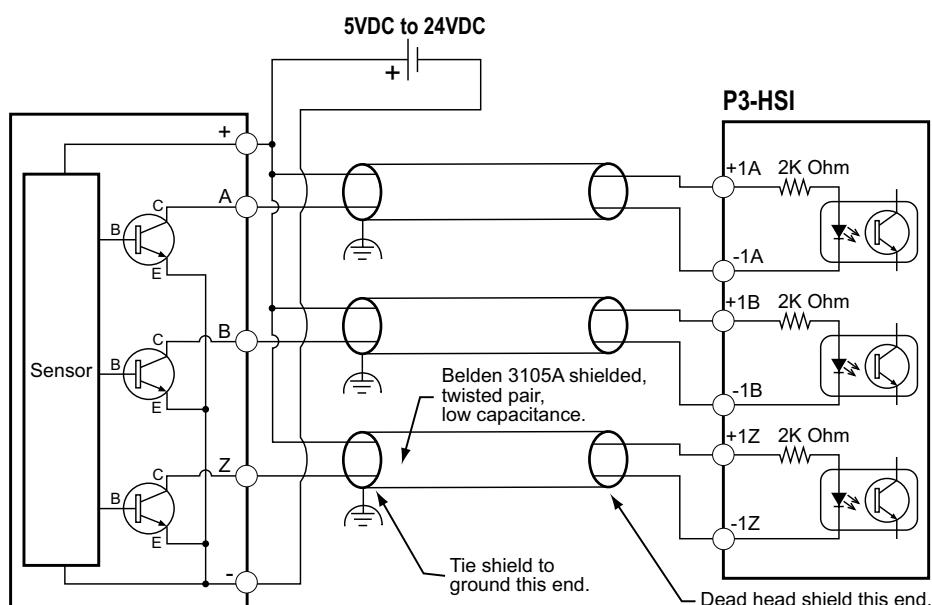


Specialty Modules

P3-HSI (cont'd)


Sinking I/O Wiring Diagram

Do not exceed 6.8V on these inputs

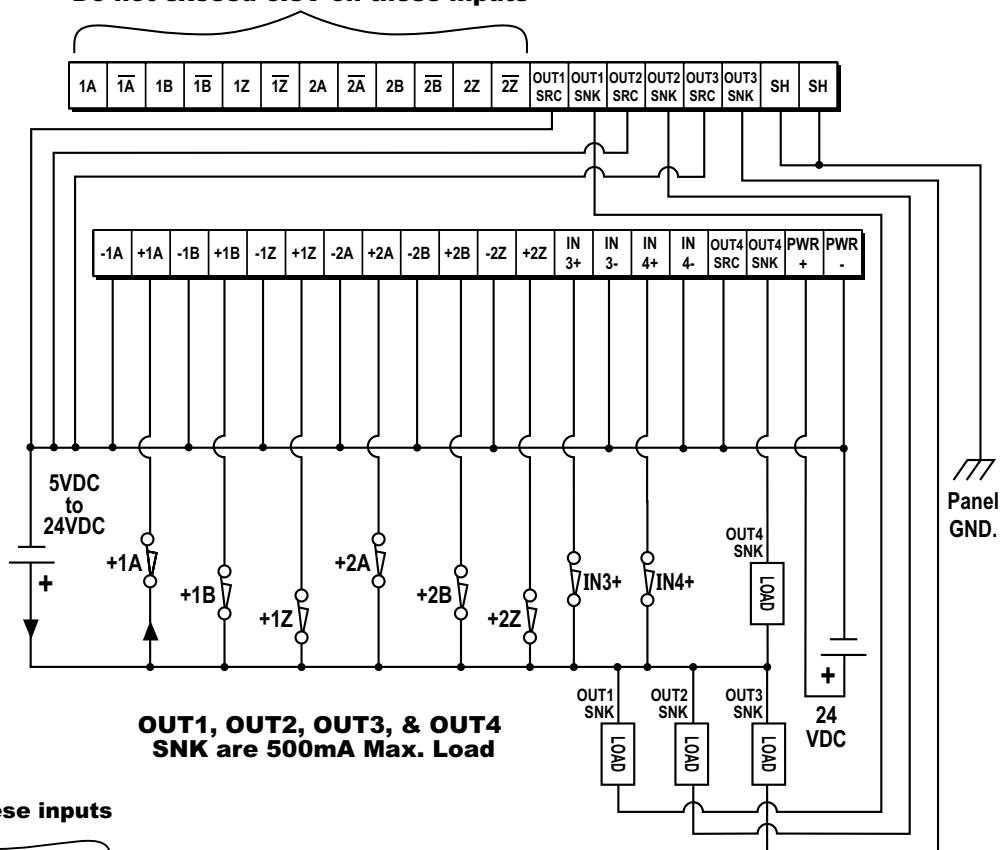

Sourcing I/O Wiring Diagram

Do not exceed 6.8V on these inputs

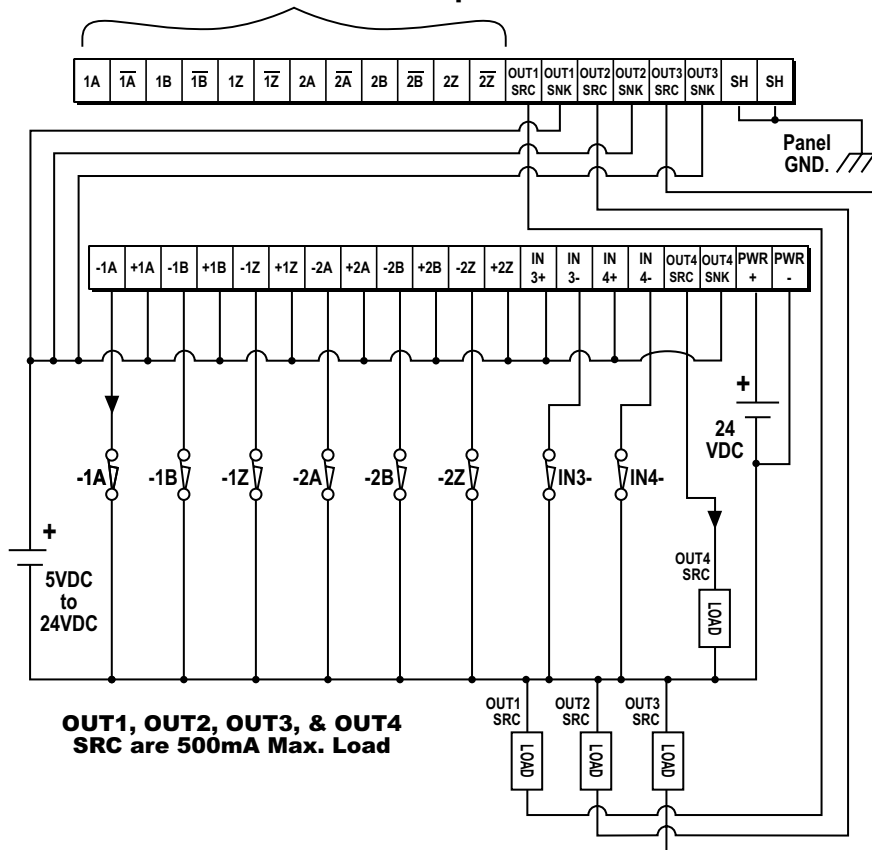



Wiring Solutions


Wiring Solutions using the ZIPLink wiring system

ZIPLinks eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end or terminating wires at only one end. Prewired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the **ZIPLink** System ranging from

PLC I/O-to-**ZIPLink** Connector Modules that are ready for field termination, options for connecting to third party devices, GS, DuraPulse and SureServo Drives, and specialty relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for quick marking of **ZIPLink** modules are provided with **ZIPLink** cables. See the following solutions to help determine the best **ZIPLink** system for your application.

Solution 1: Productivity Series I/O Modules to ZIPLink Connector Modules

When looking for quick and easy I/O-to-field termination, a **ZIPLink** connector module used in conjunction with a prewired **ZIPLink** cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.

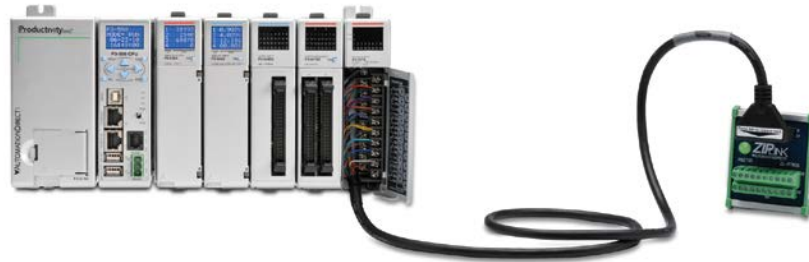


Using the PLC I/O Modules to **ZIPLink** Connector Modules selector tables located in this section,

1. Locate your I/O module/PLC.
2. Select a **ZIPLink** Module.
3. Select a corresponding **ZIPLink** Cable.

Solution 2: Productivity Series I/O Modules to ZIPLink Connector Modules

When wanting to connect I/O to another device within close proximity of the I/O modules, no extra terminal blocks are necessary when using the **ZIPLink** Pigtail Cables. **ZIPLink** Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.

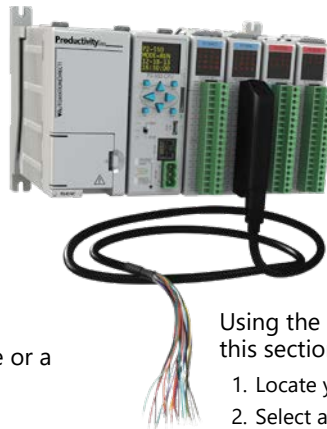

Using the I/O Modules to 3rd Party Devices selector tables located in this section,

1. Locate your PLC I/O module.
2. Select a **ZIPLink** Pigtail Cable that is compatible with your 3rd party device.

Solution 3: GS Series and DuraPulse Drives Communication Cables

Need to communicate via Modbus RTU to a drive or a network of drives?

ZIPLink cables are available in a wide range of configurations for connecting to PLCs and SureServo, SureStep, Stellar Soft Starter and AC drives. Add a **ZIPLink** communications module to quickly and easily set up a multi-device network.

Using the Drives Communication selector tables located in this section,

1. Locate your Drive and type of communications.
2. Select a **ZIPLink** cable and other associated hardware.





Wiring Solutions

Solution 4: Serial Communications Cables

ZIPLink offers communications cables for use with DirectLOGIC, CLICK, and Productivity3000 CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-sub connectors which can be used in conjunction with the RJ12 or D-Sub Feedthrough modules.

Using the Serial Communications Cables selector table located in this section,

1. Locate your connector type
2. Select a cable.



Solution 5: Specialty ZIPLink Modules

For additional application solutions, **ZIP**Link modules are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-sub and RJ12 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the **ZIP**Link Specialty Modules selector table located in this section,

1. Locate the type of application.
2. Select a **ZIP**Link module.



Solution 6: ZIPLink Connector Modules to 3rd Party Devices

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color-coded soldered-tip wires are a good solution. Used in conjunction with any compatible **ZIP**Link Connector Modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Using the Universal Connector Modules and Pigtail Cables table located in this section,

1. Select module type.
2. Select the number of pins.
3. Select cable.





CPU I/O Modules to ZIPLink Connector Modules - Productivity3000®

Productivity3000 CPU Input Module ZIPLink Selector				
CPU		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
P3-08NAS	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
P3-08ND3S	20	Feedthrough		
P3-16NA	20	Feedthrough		ZL-P3-CBL20-1L
P3-16ND3	20	Feedthrough		ZL-P3-CBL20-2L
		Sensor	ZL-LTB16-24-1	
P3-32ND3	40	Feedthrough	ZL-RTB40	ZL-CBL40
		Sensor	ZL-LTB32-24-1	ZL-CBL40-1
P3-64ND31	40	Feedthrough	ZL-RTB40	ZL-CBL40-2
		Sensor	ZL-LTB32-24-1	

Productivity3000 CPU Analog In Module ZIPLink Selector				
CPU		ZIPLink		
Analog Module	# of Terms	Component	Module	Cable
P3-04ADS	20	Feedthrough	ZL-RTB20	
P3-08AD	20	Feedthrough		ZL-P3-CBL20-1L
P3-16AD-1	20	Feedthrough		ZL-P3-CBL20-2L
P3-16AD-2	20	Feedthrough		
P3-08RTD ²	Matched Only	See Note 2		
P3-08THM ²	T/C Wire Only	See Note 2		
P3-04DA	20	Feedthrough	ZL-RTB20	
P3-08DA-1	20	Feedthrough		
P3-08DA-2	20	Feedthrough		
P3-16DA-1	20	Feedthrough		ZL-P3-CBL20-1L
P3-16DA-2	20	Feedthrough		ZL-P3-CBL20-2L
P3-8AD4DA-1	20	Feedthrough		
P3-8AD4DA-2	20	Feedthrough		

Productivity3000 CPU Specialty Module ZIPLink Selector				
CPU		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
P3-HSI	40	Feedthrough	ZL-RTB40	ZL-CBL40-S
P3-HSO				ZL-CBL40-1S
				ZL-CBL40-2S



Note: ZIPLink Connector Modules specifications follow the Compatibility Matrix tables. ZIPLink Cables specifications are at the end of this ZIPLink section.

Productivity3000 CPU Output Module ZIPLink Selector				
CPU		ZIPLink		
Output Module	# of Terms	Component	Module Part No.	Cable Part No.
P3-08TAS	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
P3-08TD1S	20	Feedthrough		ZL-P3-CBL20-1L
P3-08TD2S	20	Feedthrough		ZL-P3-CBL20-2L
P3-08TRS	20	Feedthrough		
P3-16TA	20	Feedthrough	ZL-RTB20	
		Fuse		
P3-16TD1	20	Feedthrough		
		Fuse		ZL-RFU20 ⁴
		Relay (sinking)	ZL-RRL16-24-1	ZL-P3-CBL20
P3-16TD2	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20-1
		Fuse	ZL-RFU20 ⁴	ZL-P3-CBL20-2
		Relay (sourcing)	ZL-RRL16-24-2	
P3-16TR	20	Feedthrough	ZL-RTB20	
		Fuse	ZL-RFU20 ⁴	
P3-08TRS-1 ³	20	Feedthrough	ZL-RTB20	
		Fuse	ZL-RFU20 ⁴	
P3-32TD1	40	Feedthrough	ZL-RTB40	
		Fuse	ZL-RFU40 ⁴	
P3-32TD2	40	Feedthrough	ZL-RTB40	
		Fuse	ZL-RFU40 ⁴	ZL-CBL40
P3-64TD1 ¹	40	Feedthrough	ZL-RTB40	ZL-CBL40-1
		Fuse	ZL-RFU40 ⁴	ZL-CBL40-2
P3-64TD2 ¹	40	Feedthrough	ZL-RTB40	
		Fuse	ZL-RFU40 ⁴	

* Select the cable length by replacing the * with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m.

1 The P3-64ND3, P3-64TD1 and P3-64TD2 modules have two 32-point connectors and require two ZIPLink cables and two ZIPLink connector modules.

2 These modules are not supported by the ZIPLink wiring system.

3 The P3-08TRS-1 output module is derated not to exceed 2A per point maximum when used with the ZIPLink wiring system.

4 Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits.

To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400 mA per circuit.



I/O Modules

A variety of discrete, analog and specialty I/O modules are available for use in local, expansion, and remote I/O bases. Specifications for each module are on the following pages.

A filler module is available for unused I/O module slots (part number P3-FILL).

Discrete Input Modules

Productivity3000 Discrete Input Modules			
Part Number	Number of Inputs	Description	Price
P3-16SIM	16	Input Simulator Module	\$214.00
P3-08ND3S	8	Isolated Sinking/Sourcing DC Input	\$109.00
P3-16ND3	16	Sinking/Sourcing DC Input	\$162.00
P3-32ND3	32	Sinking/Sourcing DC Input	\$218.00
P3-64ND3	64	Sinking/Sourcing DC Input	\$284.00
P3-08NAS	8	Isolated AC Input	\$136.00
P3-16NA	16	AC Input	\$167.00

*ZIPLink required.

Analog I/O Modules

Productivity3000 Analog Input Modules			
Part Number	Number of Channels	Description	Price
P3-04ADS	4	Isolated Analog Input	\$796.00
P3-08AD	8	Analog Input	\$432.00
P3-16AD-1	16	Analog Input (Current)	\$589.00
P3-16AD-2	16	Analog Input (Voltage)	\$576.00
P3-08RTD	8	Analog RTD Input	\$639.00
P3-08THM	8	Analog Thermocouple Input	\$810.00

Productivity3000 Analog Output Modules			
Part Number	Number of Channels	Description	Price
P3-04DA	4	Analog Output	\$494.00
P3-08DA-1	8	Analog Output (Current)	\$857.00
P3-08DA-2	8	Analog Output (Voltage)	\$798.00
P3-16DA-1	16	Analog Output (Current)	\$1,022.00
P3-16DA-2	16	Analog Output (Voltage)	\$1,002.00

Productivity3000 Analog Input/Output Modules			
Part Number	Number of Channels	Description	Price
P3-8AD4DA-1	8/4	Analog Input/Output (Current)	\$658.00
P3-8AD4DA-2	8/4	Analog Input/Output (Voltage)	\$679.00

Specialty Modules

Productivity3000 Specialty Modules			
Part Number	Number of Channels	Description	Price
P3-HSI	2	High-Speed Pulse Input	\$619.00
P3-HSO*	2	High-Speed Output	\$646.00
P3-SCM	4 ports	Serial Communications Module	\$523.00


*ZIPLink required.

Discrete Output Modules

Productivity3000 Discrete Output Modules			
Part Number	Number of Outputs	Description	Price
P3-08TD1S	8	Isolated Sinking Output	\$164.00
P3-08TD2S	8	Isolated Sourcing Output	\$169.00
P3-16TD1	16	Sinking Output	\$175.00
P3-16TD2	16	Sourcing Output	\$180.00
P3-32TD1*	32	Sinking Output	\$228.00
P3-32TD2*	32	Sourcing Output	\$218.00
P3-64TD1*	*64	Sinking Output	\$319.00
P3-64TD2*	*64	Sourcing Output	\$289.00
P3-08TAS	8	Isolated AC Output	\$212.00
P3-16TA	16	AC Output	\$225.00
P3-08TRS	8	Isolated Relay Output	\$187.00
P3-08TRS-1	8	Isolated Relay Output	\$213.00
P3-16TR	16	Relay Output	\$190.00


*ZIPLink required.

Module Installation Procedure



WARNING: DO NOT APPLY FIELD POWER UNTIL THE FOLLOWING STEPS ARE COMPLETED. SEE HOT-SWAPPING PROCEDURE FOR EXCEPTIONS.

Step One: Align circuit card with slot and press firmly to seat module into connector.




Step Two: Pull top and bottom locking tabs toward module face. Click indicates lock is engaged.

Step Three: Attach field wiring using optional terminal block or ZIPLink wiring system and install cover.



To install or remove terminal block cover, press middle to flex cover.

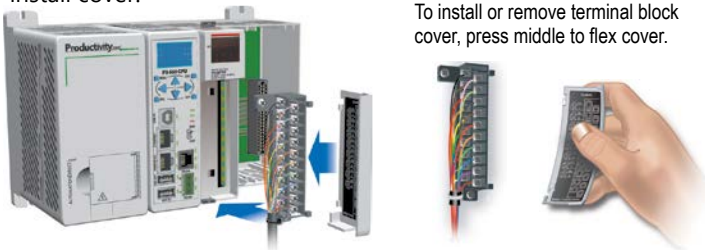

WARNING: EXPLOSION HAZARD – DO NOT CONNECT OR DISCONNECT CONNECTORS OR OPERATE SWITCHES WHILE CIRCUIT IS LIVE UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS. DO NOT HOT-SWAP MODULES UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS.