



# RACPRO1 Series Switching Power Supplies 1-Phase

## Overview

The slim RACPRO1 series is a high-reliability, single-phase AC input, DIN rail mount power supply. It is specially designed for demanding applications in the harsh industrial automation field. The unique and innovative modern design with 25-degree push-in connectors allows easy tool-less installation or replacement.

## Features

- Slim design with 25-degree push-in connectors
- Fast tool-less mounting and demounting
- DC-OK Signal
- Thermal power bonus 120%/45 °C
- Power Boost 150% for 5s
- 3-year warranty



**RACPRO1-S240E/12**



Switching Power Supplies 1-Phase Selection Chart								
Part Number	Price	Output	Output Voltage Range	Input Voltage Range	Efficiency (@ +25 °C)	Dimensions H x W x D mm [in]	Weight gram [lb]	Drawing Link
<a href="#">RACPRO1-S120/12</a>	\$105.00	12 VDC @ 8A/96W (adjustable)	12–15 VDC	85–277 VAC / 88–370 VDC	90.3% @ 230 VAC	100.00 x 28.00 x 112.00 [3.90 x 1.10 x 4.40]	330 [0.73]	<a href="#">PDF</a>
<a href="#">RACPRO1-S120/24</a>	\$105.00	24 VDC @ 5A/120W (adjustable)	24–29 VDC		93% @ 230 VAC			<a href="#">PDF</a>
<a href="#">RACPRO1-S120/48</a>	\$105.00	48 VDC @ 2.5A/120W (adjustable)	48–56 VDC		93% @ 230 VAC			<a href="#">PDF</a>
<a href="#">RACPRO1-S240E/12</a>	\$120.00	12 VDC @ 15A/180W (adjustable)	12–15 VDC	85–132 VAC / 170–277 VAC	91.3% @ 230 VAC	125.00 x 39.00 x 139.00 [4.90 x 1.50 x 4.47]	600 [1.32]	<a href="#">PDF</a>
<a href="#">RACPRO1-S240E/24</a>	\$120.00	24 VDC @ 10A/240W (adjustable)	24–29 VDC		93.1% @ 230 VAC			<a href="#">PDF</a>
<a href="#">RACPRO1-S240E/48</a>	\$120.00	48 VDC @ 5A/240W (adjustable)	48–56 VDC		94% @ 230 VAC			<a href="#">PDF</a>
<a href="#">RACPRO1-S240/24</a>	\$158.00	24 VDC @ 10A/240W (adjustable)	24–29 VDC	85–277 VAC / 88–370 VDC	95% @ 230 VAC	135.00 x 52.00 x 155.00 [5.30 x 2.00 x 6.10]	790 [1.74]	<a href="#">PDF</a>
<a href="#">RACPRO1-S480/24</a>	\$220.00	24 VDC @ 20A/480W (adjustable)	24–28 VDC		95% @ 230 VAC			<a href="#">PDF</a>
<a href="#">RACPRO1-S480/48</a>	\$220.00	48 VDC @ 10A/480W (adjustable)	48–56 VDC		95.4% @ 230 VAC			<a href="#">PDF</a>

Switching Power Supplies 1-Phase												
Part Number	Input/Output Cage Clamp								Push-in Signal Terminal *			
	Function	AWG	mm <sup>2</sup>	Wire Stripping Length	Function	AWG	mm <sup>2</sup>	Wire Stripping Length	Function	AWG	mm <sup>2</sup>	Wire Stripping Length
<b>120, 240E and 240 Watt Models</b>	L, N	24–12	0.25–4	10–12mm	+1, +2 (Vout)	24–12	0.25–4	10–12mm	Signal (13,14)	24–16	0.25–1.5	8–9mm
	PE				-1, -2 (Vout)							
<b>480 Watt Models</b>	L, N	24–8	0.25–6	12–13mm	+1, +2 (Vout)	24–8	0.25–6	12–13mm				
	PE				-1, -2 (Vout)							

\* Do not connect to hazardous voltages. Ferrules are required for stranded wire.

Use flexible (stranded wire) or solid cables with above wire cross-section is recommended. Use copper conductors designed for an operating temperature of at least 90 °C.



# RACPRO1 Series Switching Power Supplies 1-Phase S240E Models

Specifications			
<b>Models</b>	<b>S240E</b>		
<b>Nominal Input Voltage</b>	Automatic Voltage Selection	Low line	100 to 120 VAC
		High line	200 to 240 VAC
<b>Operating Range <sup>(1)</sup></b>		Low line	85 to 132 VAC
		High line	170 to 277 VAC
<b>Turn-on Voltage</b>		—	Typical 80 VAC
<b>Turn-off Voltage</b>		—	Typical 75 VAC
<b>Input Current</b>	<a href="#">RACPRO1-S240E/12</a>	120 VAC	Typical 3.4A
		240 VAC	Typical 1.5A
	<a href="#">RACPRO1-S240E/24</a> and <a href="#">RACPRO1-S240E/48</a>	120 VAC	Typical 4.2A
		240 VAC	Typical 2A
<b>Inrush Current</b>	Cold Start	120 VAC	Typical 3.3A
		240 VAC	Typical 6.3A
<b>No Load Power Consumption</b>		120 VAC	Typical 0.7W
		240 VAC	Typical 0.8W
<b>Input Frequency Range</b>		—	47–63 Hz
<b>Nominal Output Voltage (Factory Set)</b>		<a href="#">RACPRO1-S240E/12</a>	Typical 12 VDC
		<a href="#">RACPRO1-S240E/24</a>	Typical 24 VDC
		<a href="#">RACPRO1-S240E/48</a>	Typical 48 VDC
<b>Minimum Load</b>		—	0%
<b>Power Factor</b>		240 VAC, full load	Typical 0.6
<b>Start-up Time</b>		120 VAC	Typical 650 ms maximum 700 ms
		240 VAC	Typical 820 ms maximum 900 ms
<b>Rise Time</b>		—	Typical 14 ms
<b>Hold-up Time</b>		120 VAC	Minimum 32 ms typical 40 ms
		240 VAC	Minimum 34 ms typical 42 ms
<b>Internal Operating Frequency</b>		—	Typical 70 kHz
<b>Ripple and Noise</b>	20 MHz Bandwidth	120 VAC	Typical 128 mVp-p
		240 VAC	Typical 88 mVp-p
<b>Housing Material</b>	Polycarbonate (UL94 V-0) / aluminum		
<b>Agency Approvals</b>	cULus File E550315, CE		

<sup>(1)</sup> The products were submitted for safety files at AC (120/240 VAC ±10%).


Output power derating for Line-input of less than:

12 Vout: 108 VAC / 190 VAC (derate linearly from 100% at 108 VAC to 88% at 85 VAC / 100% at 190 VAC to 92% at 175 VAC).



24/48Vout: 90 VAC / 190 VAC (derate linearly from 100% at 90 VAC to 90% at 85 VAC / 100% at 190 VAC to 85% at 175 VAC).

Measured @ T<sub>AMB</sub> = 25 °C, 230 VAC full load and after warm-up unless otherwise stated.

## U/I Characteristic

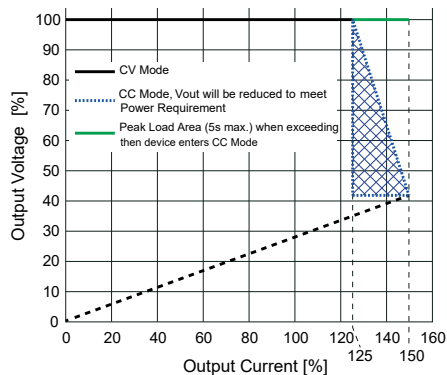

## Characteristic Curves for RACPRO1-S240E/24

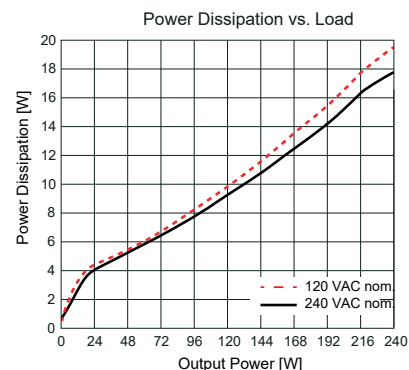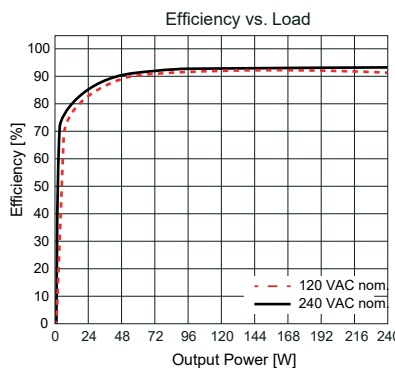



# RACPRO1 Series Switching Power Supplies 1-Phase S240E Models

Additional Features			
Parameter	Condition		Value
<b>Output Voltage Adjustability</b> <sup>(1)</sup>	Potentiometer	<a href="#">RACPRO1-S240E/12</a>	12–15 VDC
		<a href="#">RACPRO1-S240E/24</a>	24–29 VDC
		<a href="#">RACPRO1-S240E/48</a>	48–56 VDC
<b>Boost Power</b>	Refer to Boost Power		150% for 5s
<b>DC-OK LED</b>	LED Green		Output voltage OK, normal mode
	LED off		Abnormal mode, no operation or failure
<b>Signal Contact</b>	Closed		Normal mode
	Open		Abnormal mode, no operation or failure
<b>Signal Contact Rating</b>	Do not connect signaling contact to hazardous voltages	<a href="#">RACPRO1-S240E/12</a> and <a href="#">RACPRO1-S240E/24</a>	30 VDC / 0.1A
		<a href="#">RACPRO1-S240E/48</a>	60 VDC / 0.1A

<sup>(1)</sup> Make sure that the maximum rated output power will not be exceeded when trimming up.

Regulations		
Parameter	Condition	Value
<b>Output Accuracy</b>	—	Maximum $\pm 1.0\%$
<b>Line Regulation</b>	Low line to high line, full load	Maximum $\pm 0.5\%$
<b>Load Regulation</b>	0–100% load	Maximum $\pm 1.0\%$
<b>Max. Capacitive Load (Start-up)</b>	<a href="#">RACPRO1-S240E/12</a> and <a href="#">RACPRO1-S240E/24</a>	20 mF
	<a href="#">RACPRO1-S240E/48</a>	10 mF
<b>Transient Response</b>	10–100% load	Typical $\pm 2.0\%$
	Recovery time	Typical 10 ms

Measured @  $T_{AMB} = 25\text{ }^{\circ}\text{C}$ , 230 VAC full load and after warm-up unless otherwise stated.



# RACPRO1 Series Switching Power Supplies 1-Phase S240E Models

Protections			
Parameter	Type	Value	
Internal Input Fuse	DC compliant	T6.3A, slow-blow	
External Input Protection	—	16A C-characteristic circuit breaker	
Short Circuit Protection (SCP)	—	Hiccup mode, auto recovery	
Over Voltage Protection (OVP)	SELV Output	<a href="#">RACPRO1-S240E/12</a>	19 VDC, hiccup mode
		<a href="#">RACPRO1-S240E/24</a>	37 VDC, hiccup mode
		<a href="#">RACPRO1-S240E/48</a>	59.8 VDC, hiccup mode
Return Voltage Immunity	Continuous	<a href="#">RACPRO1-S240E/12</a>	Maximum 20 VDC
		<a href="#">RACPRO1-S240E/24</a>	Maximum 35 VDC
		<a href="#">RACPRO1-S240E/48</a>	Maximum 63 VDC
	<5 min	<a href="#">RACPRO1-S240E/12</a>	Maximum 25 VDC
		<a href="#">RACPRO1-S240E/24</a>	Maximum 38 VDC
		<a href="#">RACPRO1-S240E/48</a>	Maximum 63 VDC
Absorbing Energy	<a href="#">RACPRO1-S240E/12</a>	1.5J	
	<a href="#">RACPRO1-S240E/24</a>	1.3J	
	<a href="#">RACPRO1-S240E/48</a>	2J	
Over Voltage Category (OVC)	—	OVC II (5000m), OVC III (2000m)	
Over Current Protection (OCP)	<5s	> 150% of rated load current, hiccup mode, auto recovery	
Class of Equipment	—	Class I with PE connection	
Isolation Voltage (Safety Certified) <sup>(1)</sup>	I/P to O/P (tested for 1 minute)	3 kVAC / 4 kVDC	
	I/P to PE (tested for 1 minute)	1.6 kVAC / 2.5 kVDC	
	O/P to PE (tested for 1 minute)	500 VAC / 700 VDC	
Isolation Resistance	I/P to O/P	Minimum 4.5 MΩ	
Insulation Grade	—	Reinforced	
Earth Leakage Current	240 VAC / 60 Hz	Maximum 2 mA	


Measured @ T<sub>AMB</sub> = 25 °C, 230 VAC full load and after warm-up unless otherwise stated.

<sup>(1)</sup> For repeat Hi-Pot testing, reduce the time and/or the test voltage.



# RACPRO1 Series Switching Power Supplies 1-Phase S240E Models

Environmental		
Parameter	Condition	Value
<b>Operating Ambient Temperature Range</b>	At Natural Convection (0.1m/s)	Derating -40 to +70 °C [-40 to +158 °F] Without derating refer to Derating graph
<b>Operating Altitude</b>	Refer to Altitude Derating Graph	Recognized by safety agency for safe operation up to 5000m. High altitude operation may impact the performance and lifetime.
<b>Operating Humidity</b>	Non-condensing	95% RH max.
<b>Pollution Degree</b>	—	PD2
<b>IP Rating</b>	—	IP20
<b>Shock</b>	According to IEC 60068-2-27 Fa (non-operating)	15G/11 ms, 3 times (positive/negative) in all axis
<b>Vibration</b>	According to IEC 60068-2-6 Fc (non-operating)	5-8.4 Hz @ 3.5mm deflection 8.4-150 Hz @ 2G, 10 cycles /axis(min-max-min); 1 octave/min
<b>MTBF</b>	According to EN/IEC 61709 (SN29500), T <sub>AMB</sub> = 40 °C	1230 x 10 <sup>3</sup> hours
<b>Lifetime Expectancy (1)</b>	230 VAC	Refer to lifetime expectancy table



10° C reduction in heating = Doubling the Lifetime


Lifetime Expectancy at 230 VAC RACPRO1-S240E/24			
Ambient Temperature	50% Load	75% Load	100% Load
+20 °C	743 x 10 <sup>3</sup> h	662 x 10 <sup>3</sup> h	321 x 10 <sup>3</sup> h
+30 °C	372 x 10 <sup>3</sup> h	331 x 10 <sup>3</sup> h	161 x 10 <sup>3</sup> h
+40 °C	186 x 10 <sup>3</sup> h	165 x 10 <sup>3</sup> h	80 x 10 <sup>3</sup> h

The stated lifetime expectancy of more than 15 years is provided for comparison purposes only and does not imply continuous 24/7 operation.


Measured @ T<sub>AMB</sub> = 25 °C, 230VAC full load and after warm-up unless otherwise stated.

## Derating Graph


(@ Chamber and natural convection 0.1m/s)

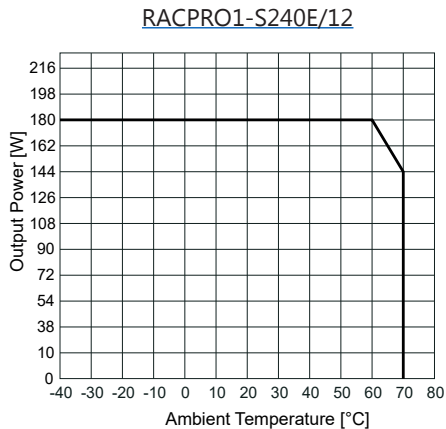


RACPRO1-S240E/24, RACPRO1-S120/48 RACPRO1-S240E/48

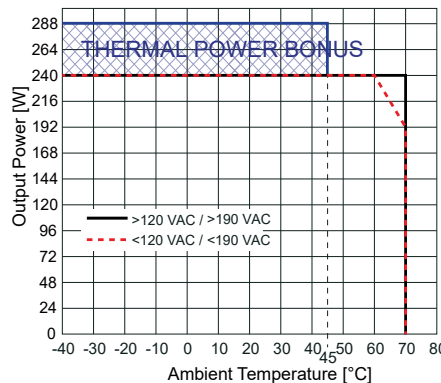

## Boost Power (-40 °C to +60 °C max)

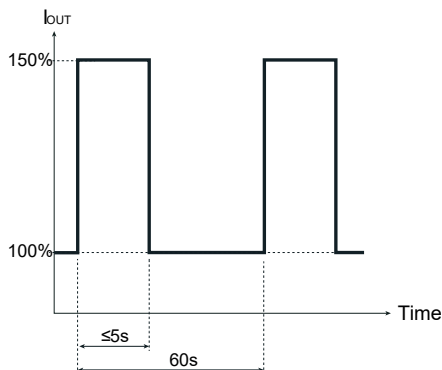

## Altitude Derating

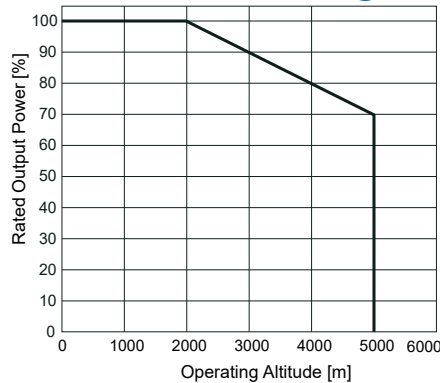



# RACPRO1 Series Switching Power Supplies 1-Phase S240E Models


## Safety & Certifications 1-Phase S240E RACPRO1 Series

Certificate Type (Safety)	Report Number	Standard
Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements (CB)	25TH0250_61010-1_0	IEC61010-1:2010+A1:2016 3rd Edition
Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements		EN61010-1:2010+A1:2019
Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements	E550315	UL61010-1:2012 3rd Edition CAN/CSA-C22.2 No. 61010-1-12 3rd Edition
Electrical Equipment For Measurement, Control, and Laboratory Use; Part 2-201: Particular requirements for control equipment (CB)	25TH0250_61010-1_0	IEC61010-2-201:2017 2nd Edition EN IEC 61010-2-201:2018
Electrical Equipment For Measurement, Control, and Laboratory Use; Part 2-201: Particular requirements for control equipment	E550315	UL61010-2-201:2018 2nd Edition CAN/CSA-C22.2 No. 61010-2-201:2018-02-01
RoHS2	—	RoHS 2011/65/EU + AM2015/863

## EMC Compliance According to IEC/EN61000-6-4/6-2 1-Phase S240E RACPRO1 Series

EMC Compliance according to IEC/EN61000-6-4/6-2	Condition	Standard / Criterion
Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity standard for industrial environments	—	IEC/EN61000-6-2:2019
Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential area	—	IEC/EN 61000-6-3:2021
ESD Electrostatic discharge immunity test	Air: ±8 kV; Contact: ±6 kV	IEC61000-4-2:2008, Criteria A EN61000-4-2:2009, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	10 V/m (80–1000 MHz)	IEC/EN61000-4-3:2006+A2:2010, Criteria A
Fast Transient and Burst Immunity	AC Power Port ±4 kV DC Output Port: ±2 kV	IEC/EN61000-4-4:2012 Criteria A
Surge Immunity	AC-Power Port L-N ±2 kV L1-PE; N-PE: ± 4 kV	IEC/EN61000-4-5:2014+A1:2017, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	10 Vrms (0.15–80 MHz)	IEC61000-4-6:2013, Criteria A EN61000-4-6:2014, Criteria A
Power Magnetic Field Immunity	30 A/m, 50/60 Hz	EN61000-4-8:2010 Criteria A
Voltage Dips (230 VAC, 50 Hz)	100% 5 cycles 70% 10 cycles 40% 25 cycles 30% 25 cycles	IEC61000-4-11:2004+A1:2017, Criteria B
Voltage Interruptions (230 VAC, 50 Hz)	100% 250 cycles	IEC61000-4-11:2004+A1:2017, Criteria B
Limits of Harmonic Current Emissions	—	EN IEC 61000-3-2:2019
Limits of Voltage Fluctuations & Flicker	—	IEC61000-3-3:2013+A1:2017

## Block Diagram

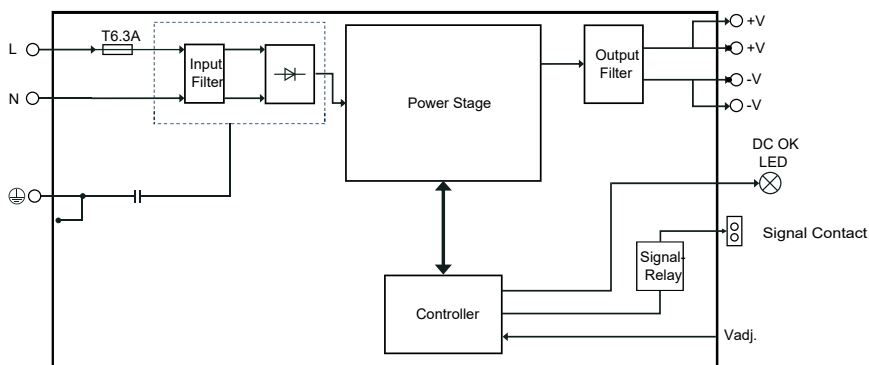





# RACPRO1 Series Switching Power Supplies 1-Phase S240E Models

## Parallel Operation for Redundancy 1+1

- 1) Adjust each power supply to the exact same output voltage with the same load and cooling conditions.
- 2) Use the same wire length and cable cross-section for each power supply (star connection) and energize all units at the same time to avoid triggering overload protection.
- 3) It must be ensured that one of the power supplies is able to provide the total required output power of the DC load to be supplied.
- 4) In normal operation, each of the two power supplies will be utilized by up to 50%.
- 5) **Attention:** To prevent high reverse currents in the event of a secondary output fault, it is recommended to install a protective circuit at the output of each device when more than two power supplies are connected in parallel (e.g. decoupling diode or DC fuse). Leakage current, EMI, inrush current, harmonics will increase when using multiple power supplies.

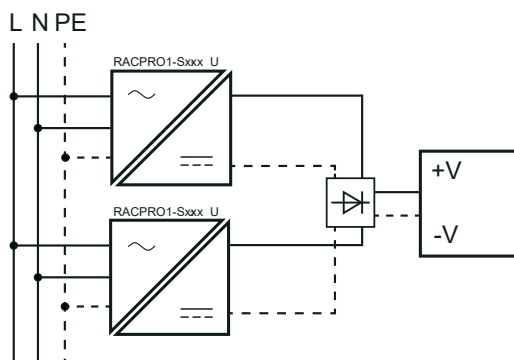

**Please Note:** This basic redundancy configuration does not protect against internal short circuits on the secondary side. In such cases, the faulty unit may draw current from the remaining supplies, resulting in loss of output regulation. To prevent this, use redundancy modules with integrated decoupling elements. RECOM offers the [RACPRO1-RD40](#) redundancy module as a suitable solution for this purpose:

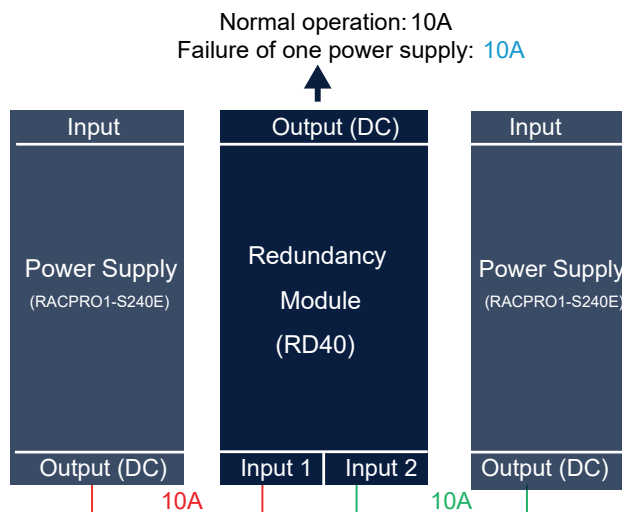




# RACPRO1 Series Switching Power Supplies 1-Phase S240E Models

## Parallel Operation For Increasing Output Power 1+n

- 1) Adjust each power supply to the exact same output voltage with the same load and cooling conditions.
- 2) Use the same wire length and cable cross-section for each power supply (star connection) and energize all units at the same time to avoid triggering overload protection.
- 3) A 10% safety margin may be recommended because the power distribution may be slightly asymmetrical depending on the cabling.
- 4) **Attention:** To prevent high reverse currents in the event of a secondary output fault, it is recommended to install a protective circuit at the output of each device when more than two power supplies are connected in parallel (e.g. decoupling diode or DC fuse). Leakage current, EMI, inrush current, harmonics will increase when using multiple power supplies.

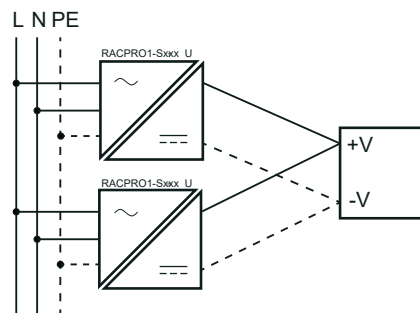

## Series Operation

- 1) Only use PSU with the same type and performance class with identical parameters.
- 2) To increase the DC output voltage, connect 2 or more power supply units in series.
- 3) Therefore, negative output terminal "-1" of the first power supply unit must be connected to the positive output terminal "+1" of the second power supply unit and routed to the load. Depending on the common output-side earth reference point of the power supply unit, see below table/figures as example.
- 4) **Attention:** Leakage current, EMI, inrush current, harmonics will increase when using power supplies.

Example with 2 PSUs In Series			
Part Number	Figure 1	Figure 2	Figure 3
<b>RACPRO1-S240E/24</b>	+48 VDC	-48 VDC	±24 VDC
<b>RACPRO1-S240E/48</b>	+96 VDC	-96 VDC	±48 VDC

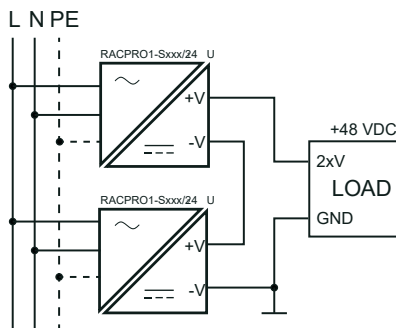


Figure 1

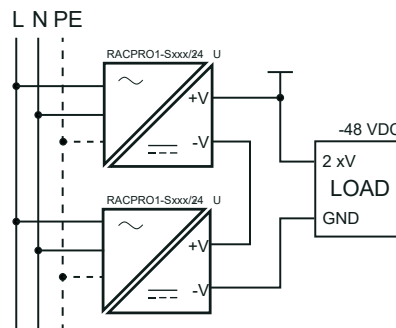


Figure 2

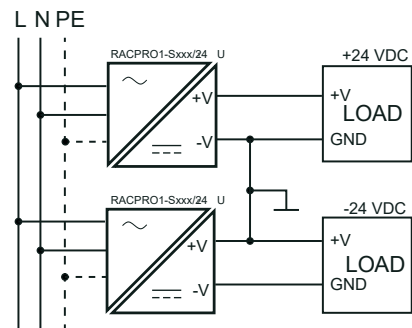


Figure 3