


# Dold Safety Relays

## Multi-Function Light Curtain Controller



Designed to protect people and machinery in applications with light curtains; can be operated in protection, muting and stepping modes.

- Connect up to 3 light curtains
- Broken wire detection on light curtain input
- Multifunction device - different functions selectable by rotational switches: protective, muting, stepping
- Suitable to connect light curtains of type 4 or self-testing light curtains type 2 according to IEC/EN 61 496-1, cross-fault monitoring in the light curtain
- Undervoltage and overvoltage detection and indication
- LED indicators for RUN and Status Outputs 1 and 2
- Two PNP sensor inputs only

### Safety Data – Values per EN ISO 13849-1

Category	4 according to EN 954-1
Performance level	PLe according to EN 13849-1
MTTF <sub>d</sub>	31.5 years
DC <sub>avg</sub>	98.9%

### Safety Data – Values per IEC/EN 62061 /IEC/EN 61508

SIL CL	3 per IEC/EN 62061
SIL	3 per IEC/EN 61508
HFT (Hardware Failure Tolerance)	1
DC <sub>avg</sub>	98.9%
SFF	99.6%
PFH <sub>D</sub>	7.80E <sup>-9</sup> h <sup>-1</sup>

### Selection Chart

Part Number	Price	Marking Type	Voltage	Outputs
<a href="#">BH5902-22-01MF2-61</a>	\$397.00	Light curtain controller, with 2-channel operation and selectable standard, with protective, muting or stepping modes	24 VDC	2 N.O. and 1 N.C.


### 2-Channel Light Curtain Controller Specification Table

General Specifications	
Temperature	Storage: -25°C to 85°C (-13°F to 185°F) Operating: 0°C to 50°C (32°F to 122°F)
Altitude	< 2,000 meters
Vibration Resistance	Amplitude: 0.35mm, Frequency: 10 to 55 Hz (IEC/EN 60-068-2-6)
Degree of Protection	Per IEC/EN 60 529. Housing: IP40; Terminals IP20
Housing	UL 94V-0 Thermoplastic; Din mount 35 mm x 7.5 mm
Weight	320 g (11.29 oz.)
Agency Approvals and Standards	cULus file E107778, CE, RoHS, TUV
Terminal Designation per EN 50 005 Wire Connections	1x4 mm <sup>2</sup> solid or 1 x 2.5 mm <sup>2</sup> stranded ferruled (isolated) or 2 x 1.5 mm <sup>2</sup> stranded ferruled (isolated) DIN 46 228-1/-2/-3/-4 or 2 x 2.5 mm <sup>2</sup> stranded ferruled DIN 46 228-1/-2/-3
Wire Fixing	Terminal screws M3.5 box terminals with wire protection or cage clamp terminals.
Input Specifications	
Nominal Voltage	24VDC
Voltage Range	At 5% residual ripple: 0.85 to 1.15 UN
Maximum Consumption	170 mA (no load on semiconductor outputs)
Control Voltage - S21, S23, S31, S33, S41, S43, S48, S58	23VDC at UN
Control Current on S12, S14, S22, S24, S32, S34, S42, S44	Each 4.5 mA at UN
Minimum Voltage on Terminals S12, S14, S22, S24, S32, S34, S42, S44	16VDC
Minimum Current on M1, M2	25mA with active lamp
Short Circuit Protection	Internal with PTC (Positive Temperature Coefficient resistor)
Overvoltage Protection	Internal VDR (Voltage Dependent Resistor)
Output Specifications	
Electrical Contact Life	To AC 15 at 2A, AC 230V: 10 <sup>5</sup> switching cycles IEC/EN 60 947-5-1
Mechanical Life	10 x 10 <sup>6</sup> switching cycles
Contact Type	2 N.O., positively driven and 1 N.C relay contacts; (N.O. contacts are safety contacts)
Operate Delay	Operate delay typ. at UN: manual start 50 ms; automatic start: 1.5 s.; automatic restart: max. 55ms.;
Release Delay	Release delay typ at UN: Max: 30 ms (max 50ms when failure on LC and only one input channel de-energizes)
Nominal Output Voltage	AC: 250V; DC: See continuous current limit curve in manual.
Thermal Current (I <sub>th</sub> )	Max. 5A. See continuous current limit curve in manual.
Switching of Low Loads	M100 mV; (contacts with 5µ Au) M 1mA
Short Circuit Strength	Max fuse rating: 6A gl (IEC/EN 60 9470-5-1); Line circuit breaker: C 8 A
Switching Capacity	AC 15: N.O. contacts: 3A/230V; N.C. contacts: 2A/230V AC DC 13 at 0.1 Hz: N.C. contacts: 8A/24V DC
Switching Frequency	Max. 1,200 switching cycles/hr
Semi-conductor Output Type (over-temperature and overload protected)	Transistor plus switching, max 100mA continuous; 400mA for 0.5 sec.

# Dold Safety Relays Multi-Function Light Curtain Controller

## Wiring


**BH5902-22-01MF2-61 Block Diagram**

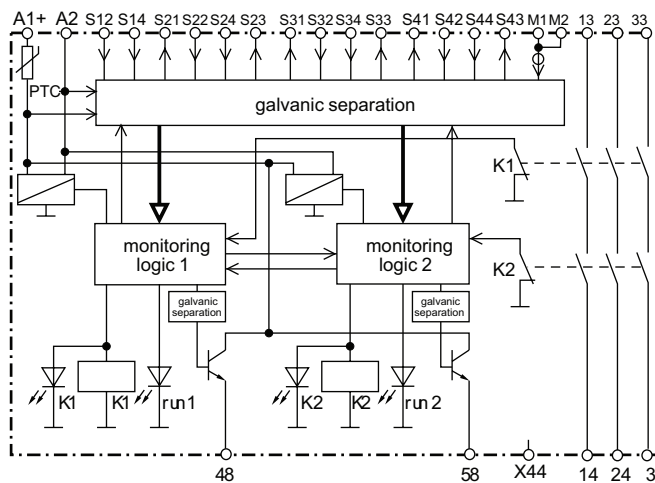


Note: All drawings are for a 3 N.O. configuration. The units will actually have a 2 N.O. and 1 N.C. configuration.

## Dimensions

mm [in]

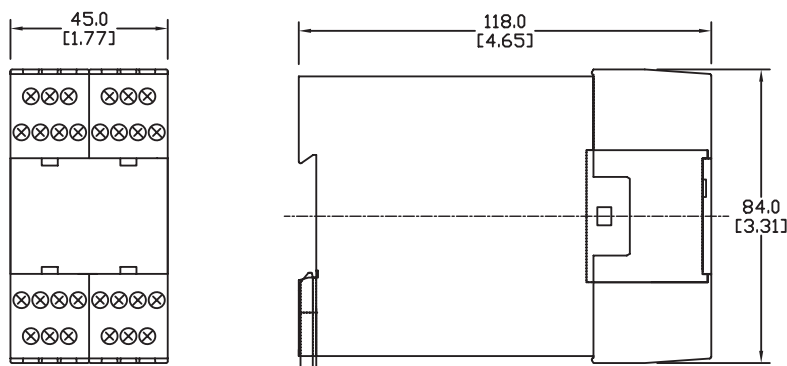

## Applications

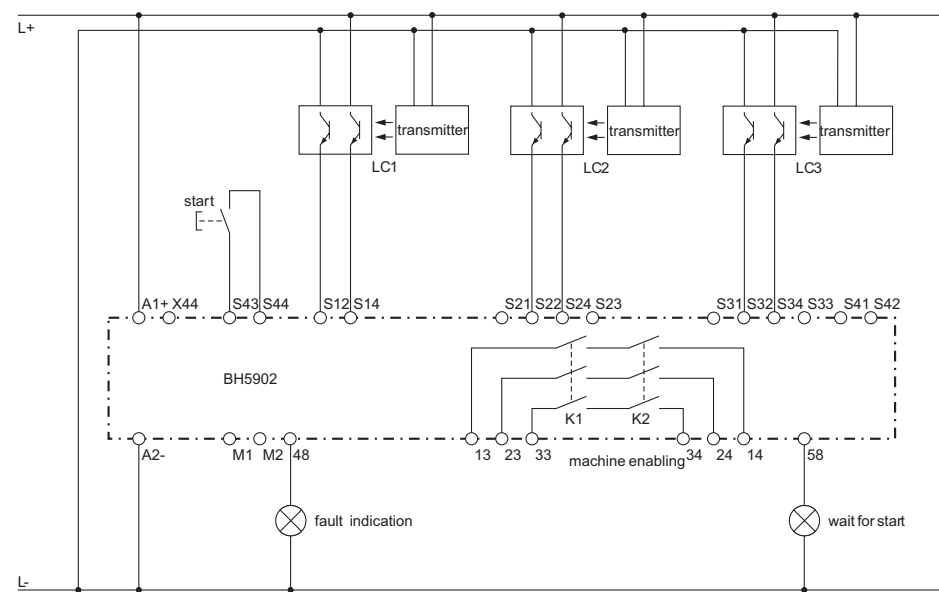


Protective operation with 3 Light Curtains, manual or auto start, setting without feedback input

\*Note: When switching inductive loads, surge suppressors are recommended.


# Dold Safety Relays

## Multi-Function Light Curtain Controller

### Applications

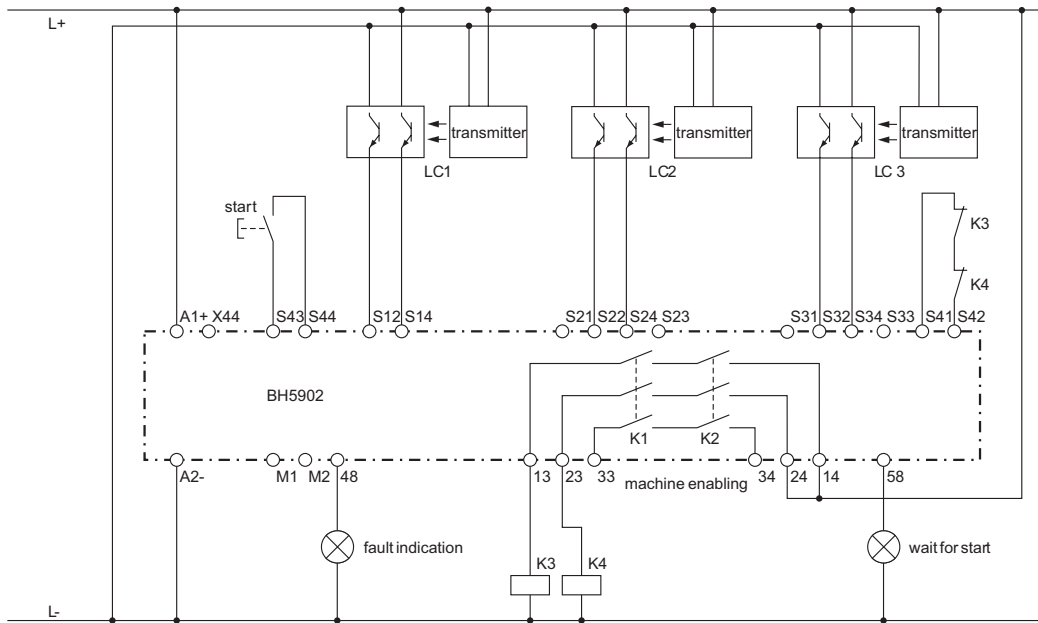

Protective operation with 3 Light Curtains, manual or autostart, setting with contact reinforcement and feedback input


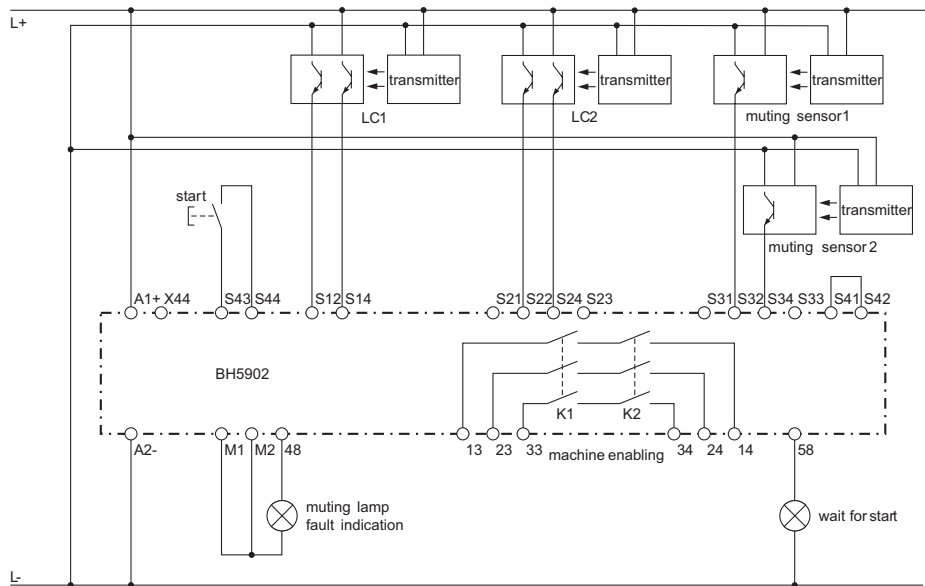


Protective operation with muting a light curtain via 2 muting sensors, 2 light curtains

*\*Note: When switching inductive loads, surge suppressors are recommended.*

# Dold Safety Relays Multi-Function Light Curtain Controller

## Applications

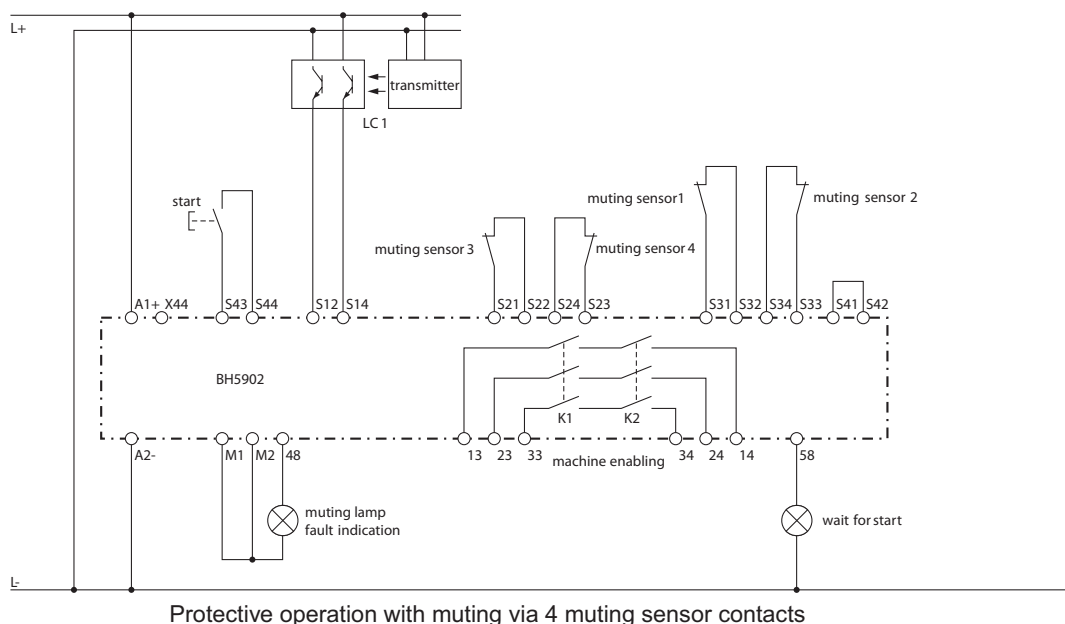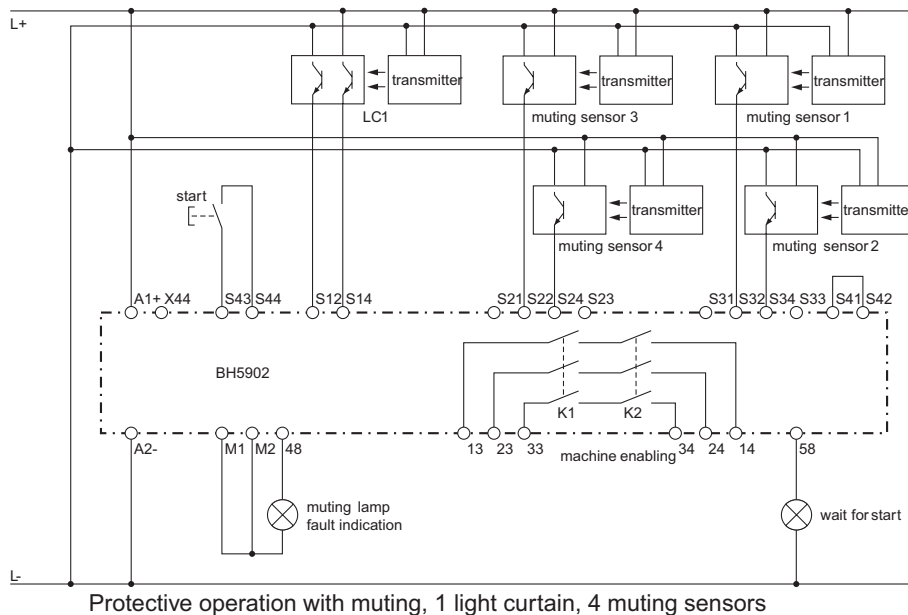

### Contact reinforcement


If external relays or contactors are used to reinforce or multiply the contacts of the safety relays, these must be monitored by feeding back one N.C. contact from each relay/contactors into the feedback inputs.

*\*Note: When switching inductive loads, surge suppressors are recommended.*


# Dold Safety Relays

## Multi-Function Light Curtain Controller

### Applications

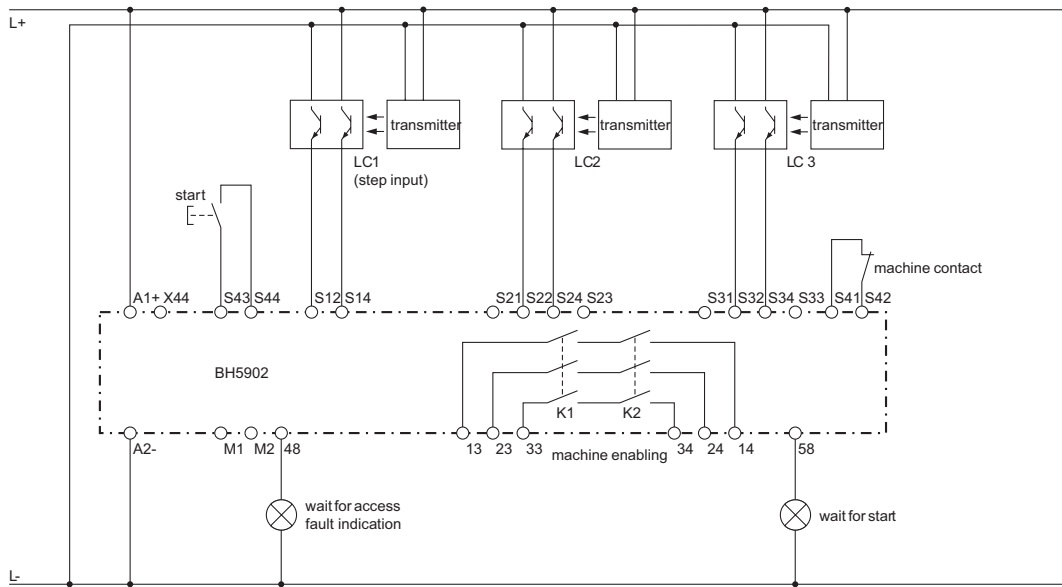

Stepping operation with 3 light curtains

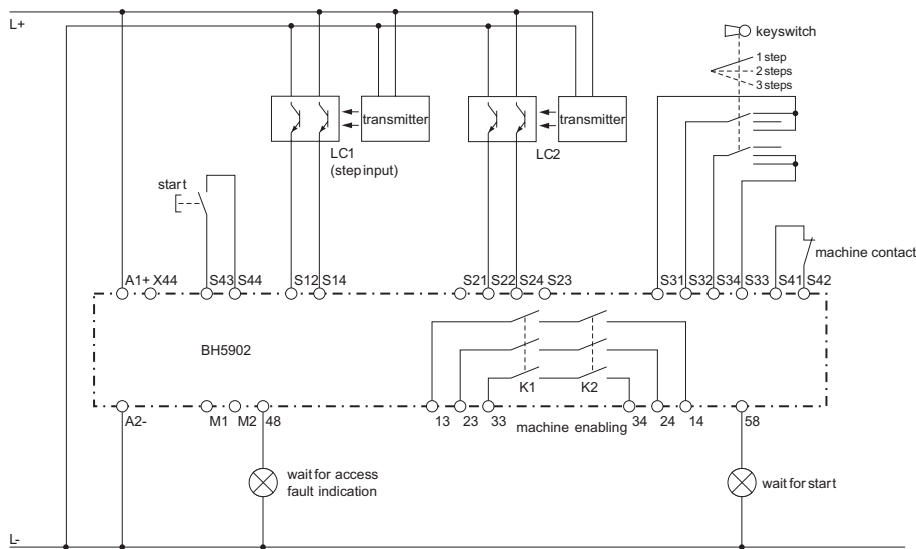


Stepping operation with key switch

*\*Note: When switching inductive loads, surge suppressors are recommended.*


# Dold Safety Relays Multi-Function Light Curtain Controller

## Applications

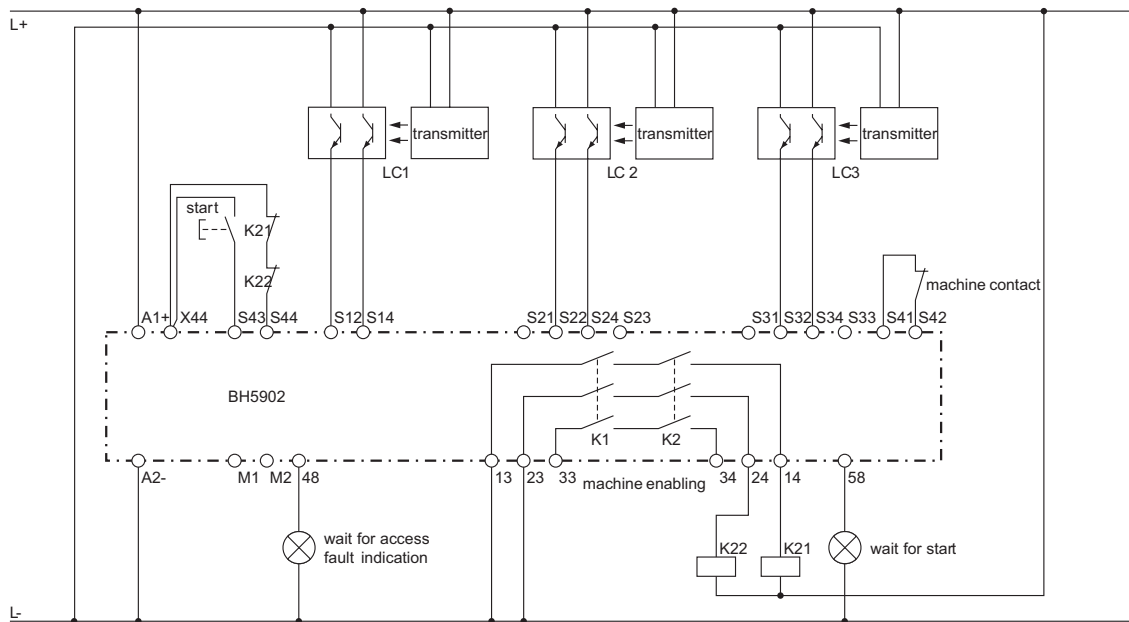

Stepping operation with 3 light curtains and contact reinforcement by external contactors, 2-channel operation (switching of feedback input can also be used at protective operation with muting)

The feedback circuit of the external relays is only tested when the module is started by pressing the pushbutton. When using this circuit, the safe function has to be tested at regular intervals. This can be done by interrupting a light curtain so that a reset requires activation of the START button. Activating the module is only possible when all external relays are de-energized.

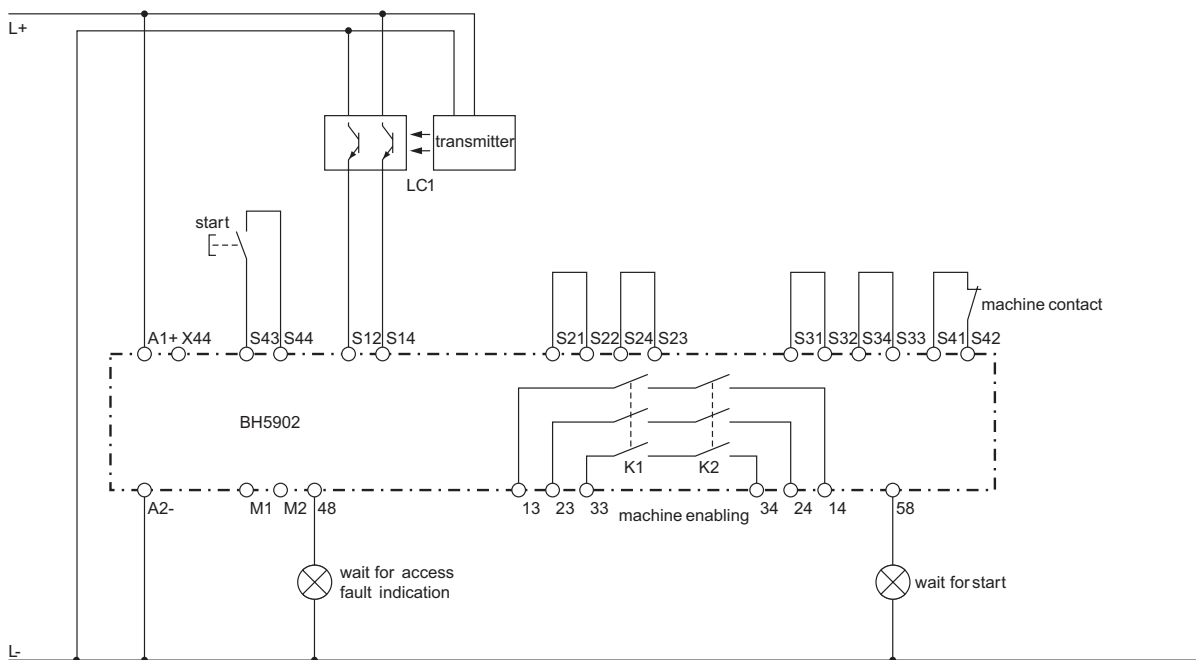

Stepping operation with one light curtain (with all operating modes, unused inputs must be jumpered).

*\*Note: When switching inductive loads, surge suppressors are recommended.*

# Dold LG5929 Extension Module



Additional contacts for emergency-stop modules and safety gate monitors.

- 1-channel or 2-channel connection
- LED indication for operation
- Output: 5 N.O. and 1 N.C. contacts

## Safety Relays Selection Chart

Part Number	Price	Marking Type	Voltage	Outputs
<b>LG5929-60-100-61</b>	\$111.00	Safety relay extension module	24 VAC/VDC	5 N.O./1 N.C.

## Safety Data – Values per EN ISO 13849-1

<b>Category</b>	<b>4 according to EN 954-1</b>
<b>Performance level</b>	PLe according to EN 13849-1
<b>MTTF<sub>d</sub></b>	>100 years
<b>DC<sub>avg</sub></b>	99%

## Safety Data – Values per IEC/EN 62061 /IEC/EN 61508

<b>SIL CL</b>	3 per IEC/EN 62061
<b>SIL</b>	3 per IEC/EN 61508
<b>HFT (Hardware Failure Tolerance)</b>	1
<b>DC<sub>avg</sub></b>	99%
<b>SFF</b>	99.7%
<b>PFH<sub>D</sub></b>	4.68E-10 h <sup>-1</sup>

## Safety Relay Extension Module Specification Table




General Specifications	
<b>Temperature</b>	Storage: -25°C to 85°C (-13°F to 185°F) Operating: -15°C to 55°C (5°F to 131°F)
<b>Altitude</b>	< 2,000 meters
<b>Vibration Resistance</b>	Amplitude: 0.35mm, Frequency: 10 to 55 Hz (IEC/EN 60-068-2-6)
<b>Degree of Protection</b>	Per IEC/EN 60 529. Housing: IP40; Terminals IP20
<b>Housing</b>	UL 94V-0 Thermoplastic; Din mount 35 mm x 7.5 mm
<b>Weight</b>	205g (7.23 oz.)
<b>Agency Approvals and Standards</b>	CSA, cULus file E107778, CE, RoHS, TUV
<b>Terminal Designation per EN 50 005 Wire Connections</b>	1x4 mm <sup>2</sup> solid or 1 x 2.5 mm <sup>2</sup> stranded ferruled (isolated) or 2 x 1.5 mm <sup>2</sup> stranded ferruled (isolated) DIN 46 228-1/-2/-3/-4 or 2 x 2.5 mm <sup>2</sup> solid per DIN 46 228-1/-2/-3 /-4
<b>Wire Fixing</b>	Plus-minus terminal screws M3.5 box terminals with wire protection or cage clamp terminals.
Input Specifications	
<b>Nominal Voltage</b>	24V AC/DC
<b>Voltage Range</b>	AC: 0.85 to 1.1 U <sub>N</sub> At 10% residual ripple: 0.9 to 1.1 U <sub>N</sub> ; At 48% residual ripple: 0.85 to 1.1 U <sub>N</sub>
<b>Maximum Consumption</b>	24VAC/DC: 1.8VA
<b>Nominal Frequency</b>	50 to 60 Hz
<b>Control Current</b>	Control current typ. at 24V over 2 relays: 75 mA
<b>Overvoltage Protection</b>	Internal VDR (Voltage Dependent Resistor)
Output Specifications	
<b>Electrical Contact Life</b>	To AC15 at 2 A, 230V: 10 <sup>5</sup> switching cycles IEC/EN 60 947-5-1
<b>Mechanical Life</b>	20 x 10 <sup>6</sup> switching cycles
<b>Contact Type</b>	5 N.O. positively driven and 1 N.C. relay contacts (N.O. contacts are safety contacts)
<b>Operate/Release Time</b>	Operate typ at U <sub>N</sub> : 20 ms.; Release typ at U <sub>N</sub> : 35 ms.
<b>Nominal Output Voltage</b>	250VAC
<b>Thermal Current (I<sub>th</sub>)</b>	Max. 5A per contact. See continuous current limit curve in installation manual.
<b>Short Circuit Strength</b>	Max fuse rating: 10A gl (IEC/EN 60 9470-5-1); Line circuit breaker: B6A
<b>Switching Capacity IEC/EN 60 947-5-1</b>	AC 15: N.O. contacts: 3A/230V; N.C. contacts: 2A/230VAC DC 13: N.O. contacts: 4A/24V; N.C. contacts: 4A/24VDC; N.O. contact: 8A/24V >25x10 <sup>3</sup> ON: 0.4s, OFF: 9.6s
<b>Switching Frequency</b>	Max. 1,200 switching cycles/hr

# Dold LG5929 Extension Module


## Wiring

## Dimensions mm [in]

**LG5929 Block Diagram**

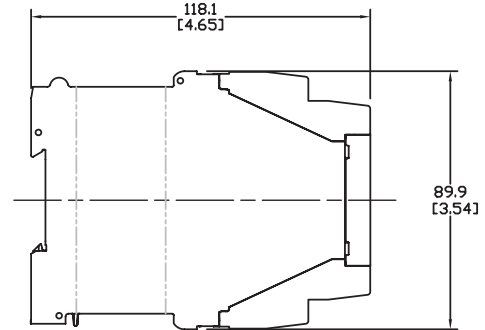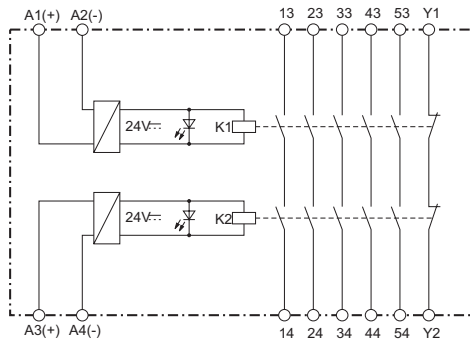

## Applications

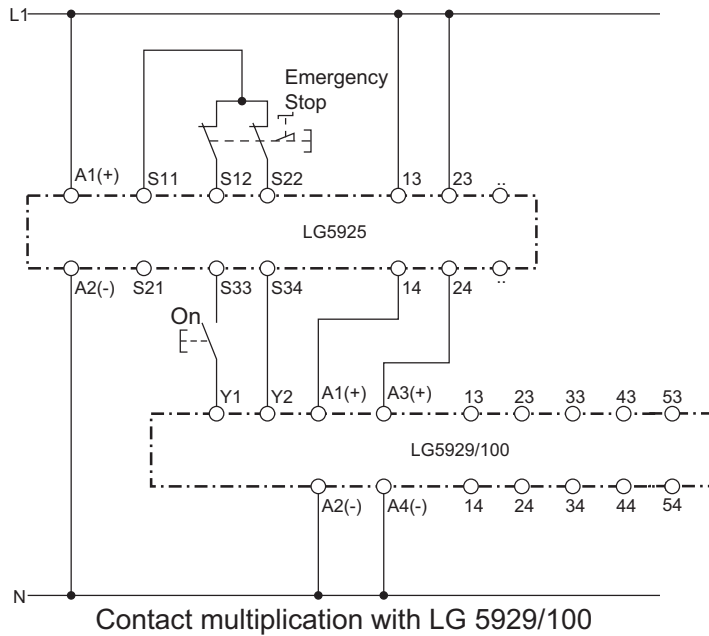

*Note: This is a representative drawing. Depending on the LG5925 safety relay you select, different voltage sources may be required.*

*\*Note: When switching inductive loads, surge suppressors are recommended.*



# Safety Products



*Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.*

*AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.*