




# Synchronous Drive Components

## QD®\* Style Bushings

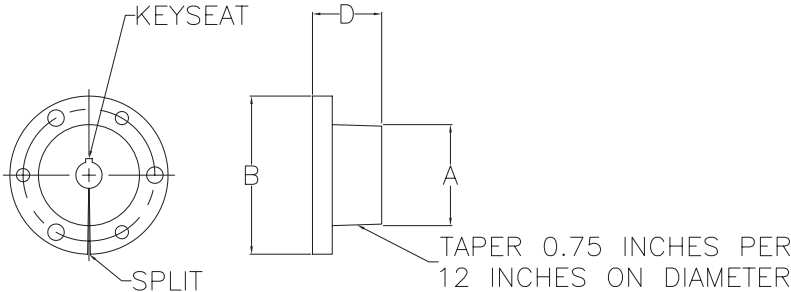

QD® Bushings														
Part Number	Price	Weight (lb)	Series	Torque Capacity (lb-in)	Bore Size (in)		Keyway (in)	Dimensions (in)			Bolt Circle (in)	Cap Screws		Material*
					Nominal	Max. with Shallow Keyseat		A	B	D		#	Size	
QD-JA-0500	\$8.75	0.5	JA	1750	0.500	1-1/4	1/8	1.375	2.0	1.0	1.6563	3	#10 x 1	S
QD-JA-0625	\$8.75	0.5		1750	0.625	1-1/4	3/16	1.375	2.0	1.0	1.6563	3	#10 x 1	S
QD-JA-0750	\$8.75	0.4		1750	0.750	1-1/4	3/16	1.375	2.0	1.0	1.6563	3	#10 x 1	S
QD-JA-0875	\$8.75	0.4		1750	0.875	1-1/4	3/16	1.375	2.0	1.0	1.6563	3	#10 x 1	S
QD-SH-0500	\$12.50	1.3	SH	3500	0.500	1-5/8	1/8	1.871	2.6875	1.25	2.25	3	1/4 x 1-3/8	S
QD-SH-0625	\$12.50	1.2		3500	0.625	1-5/8	3/16	1.871	2.6875	1.25	2.25	3	1/4 x 1-3/8	S
QD-SH-0750	\$12.50	1.2		3500	0.750	1-5/8	3/16	1.871	2.6875	1.25	2.25	3	1/4 x 1-3/8	S
QD-SH-0875	\$12.50	1.2		3500	0.875	1-5/8	3/16	1.871	2.6875	1.25	2.25	3	1/4 x 1-3/8	S
QD-SH-1000	\$12.50	1.1		3500	1.000	1-5/8	1/4	1.871	2.6875	1.25	2.25	3	1/4 x 1-3/8	S
QD-SDS-0625	\$16.00	1.8	SDS	5000	0.625	1-15/16	3/16	2.1875	3.1875	1.3125	2.6875	3	1/4 x 1-3/8	S
QD-SDS-0750	\$16.00	1.8		5000	0.750	1-15/16	3/16	2.1875	3.1875	1.3125	2.6875	3	1/4 x 1-3/8	S
QD-SDS-0875	\$16.00	1.8		5000	0.875	1-15/16	3/16	2.1875	3.1875	1.3125	2.6875	3	1/4 x 1-3/8	S
QD-SDS-1000	\$16.00	1.6		5000	1.000	1-15/16	1/4	2.1875	3.1875	1.3125	2.6875	3	1/4 x 1-3/8	S
QD-SDS-1125	\$16.00	1.5		5000	1.125	1-15/16	1/4	2.1875	3.1875	1.3125	2.6875	3	1/4 x 1-3/8	S
QD-SD-0750	\$18.50	2.2	SD	5000	0.750	1-15/16	3/16	2.1875	3.1875	1.8125	2.6875	3	1/4 x 1-7/8	S
QD-SD-0875	\$18.50	2.1		5000	0.875	1-15/16	3/16	2.1875	3.1875	1.8125	2.6875	3	1/4 x 1-7/8	S
QD-SD-1000	\$18.50	2.0		5000	1.000	1-15/16	1/4	2.1875	3.1875	1.8125	2.6875	3	1/4 x 1-7/8	S
QD-SD-1125	\$18.50	1.9		5000	1.125	1-15/16	1/4	2.1875	3.1875	1.8125	2.6875	3	1/4 x 1-7/8	S
QD-SD-1250	\$18.50	1.8		5000	1.250	1-15/16	1/4	2.1875	3.1875	1.8125	2.6875	3	1/4 x 1-7/8	S

"QD" is a registered trademark of Emerson Electric.

\* S = Steel

Note: Stock bore sizes shown. Bushings may be re-bored up the maximum size listed. Maximum bores may require a shallow keyway and rectangular key.



# Synchronous Drive Components

## Product Overview



**Timing Pulleys**



**Bushings**




**Timing Belts**

Timing pulleys, bushings, and belts allow you to change speed and torque while connecting mechanically rotating components.

- Select pulley sizes in order to accomplish the speed or torque change that you need.
- Bushings allow you to connect the same pulleys to different sized shafts, or vice versa.
- Synchronous drive belts and pulleys utilize teeth to prevent slippage and unwanted speed variations.

Note: For pulley speeds in excess of 6,000 RPM, pulleys should be dynamically balanced.

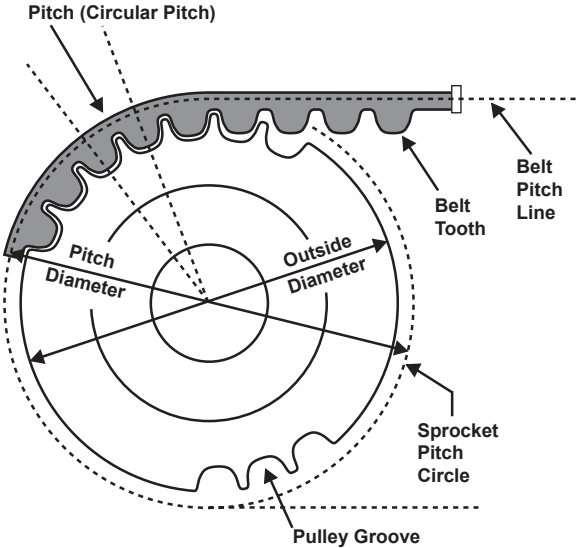

## Drive Component Selection

1. Determine required torque (ft·lbs) and rpm of driven shaft.
2. Determine design horsepower:

$$DHP = \frac{T \cdot N \cdot sf}{5,252}$$

Where: T = torque (ft·lb)  
 N = rpm  
 sf = service factor per table

Service Factors			
Machine Type	<8hr per day	8-16 hr per day	Continuous
Smooth Running	1.0	1.2	1.4
Light Shock Loads	1.3	1.5	1.7
Heavy Shock Loads	1.7	1.9	2.1


3. Determine Pitch (MXL XL or L) and belt width required by reading Design Horsepower Chart.
4. Select driver and driven pulleys to match desired speed or torque change.
5. Determine belt length per belt length calculation.

Note: AutomationDirect provides an online configuration tool to assist with pulley and belt sizing.  
 See: [www.automationdirect.com/selectors/beltandpulley](http://www.automationdirect.com/selectors/beltandpulley)




# Synchronous Drive Components

## Design Horsepower Chart

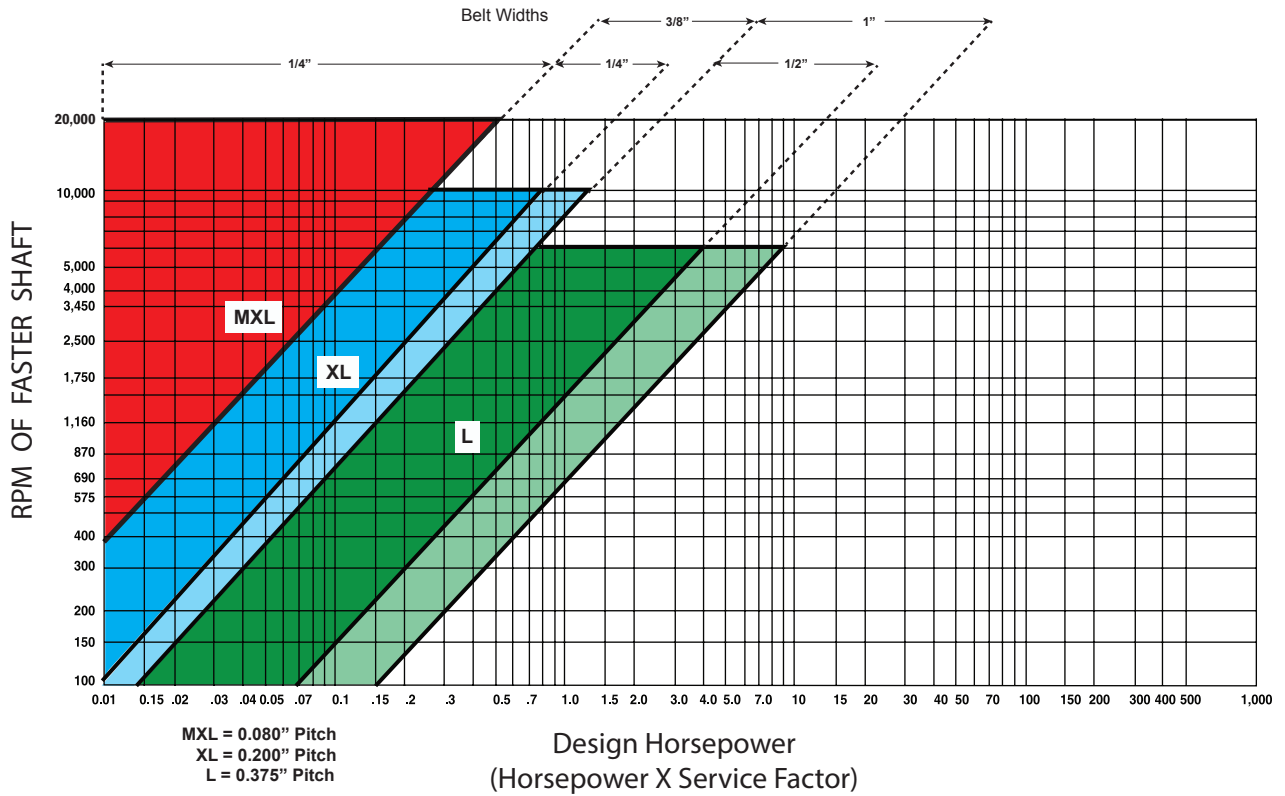

## Drive Component Selection Continued

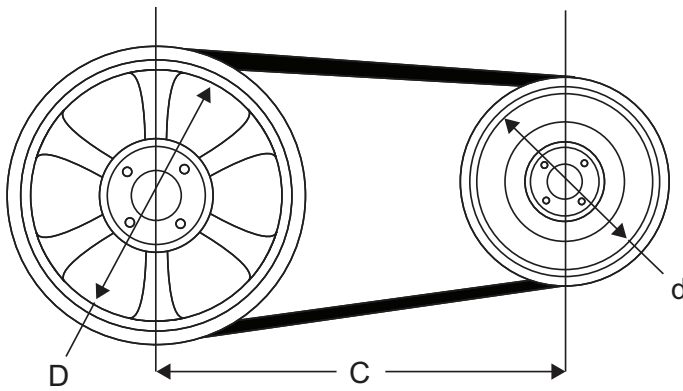

### Belt Length Calculations

$$L = 2C + 1.57(D + d) + \frac{(D-d)^2}{4C}$$

Where:

- L = Length of belt at pitch line (in inches)
- C = Center distance (in inches)
- D = Pitch diameter (in inches) of large sprocket
- d = Pitch diameter (in inches) of small sprocket