


## XBE-DC16A Digital Input Module

Part Number	Price	Classification	Description	Drawing
<b>XBE-DC16A</b>	\$70.00	Digital Input	LS Electric XGB discrete input module, 16-point, 24 VDC, sinking/sourcing, 1 common(s), 16 point(s) per common. Removable terminal blocks included.	PDF

General Specifications	XBE-DC16A				
<b>Input Point</b>	16 point				
<b>Insulation Method</b>	Photo coupler insulation				
<b>Rated Input Voltage</b>	24VDC				
<b>Rated Input Current</b>	4mA				
<b>Operation Voltage Range</b>	20.4–28.8 VDC (ripple rate <5%)				
<b>On Voltage/Current</b>	19VDC or higher / 3mA or higher				
<b>Off Voltage/Current</b>	6VDC or less / 1mA or less				
<b>Input Resistance</b>	5.6 kΩ				
<b>Response Time</b>	<table border="1"> <tr> <td><i>Off → On</i></td> <td>1/3/5/10/20/70/100 ms (set by PLC parameter)</td> </tr> <tr> <td><i>On → Off</i></td> <td>Default: 3ms</td> </tr> </table>	<i>Off → On</i>	1/3/5/10/20/70/100 ms (set by PLC parameter)	<i>On → Off</i>	Default: 3ms
<i>Off → On</i>	1/3/5/10/20/70/100 ms (set by PLC parameter)				
<i>On → Off</i>	Default: 3ms				
<b>Insulation Pressure</b>	560VACrms / 3 Cycle (2000m altitude)				
<b>Insulation Resistance</b>	10MΩ or more by Megohmmeter				
<b>Common Method</b>	16 point / COM				
<b>Proper Cable Size</b>	Stranded cable 0.3–0.75 mm <sup>2</sup> (external diameter 2.8 mm or less)				
<b>Current Consumption</b>	40mA (when all point On)				
<b>Operation Indicator</b>	Input On, LED On				
<b>External Connection Method</b>	8-pin terminal block connector + 10-pin terminal block connector				
<b>Weight</b>	53g				

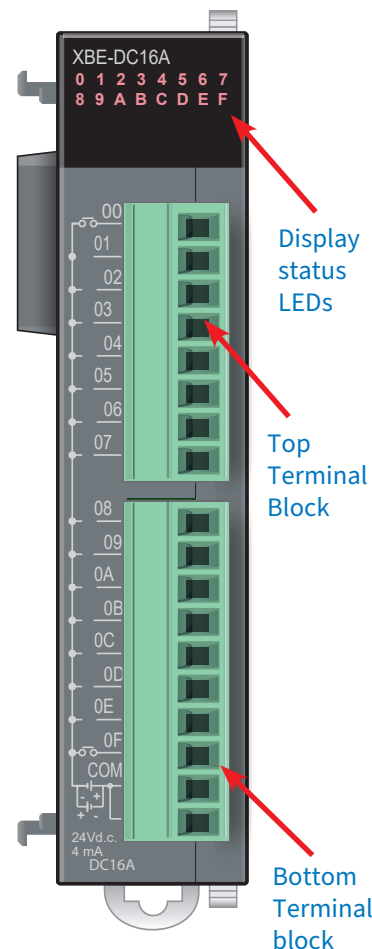

## XBE-DC16A - Digital I/O Module Configuration

### Direct Variables

The base rack slot number determines the Direct Variable name for the module. Each slot is automatically allocated 64 input points and 64 output points. See the chart below for the actual input Direct Variable assignments used.

For Direct Variable nomenclature explanation, see [Direct Variable User Programming Memory](#).

Part Number	PLC Memory Allocation	Actual I/O Direct Variable
<b>XBE-DC16A</b>	Input: %IX0.z.0 – %IX0.z.63 Output: %QX0.z.0 – %QX0.z.63	%IX0.z.0 – %IX0.z.15

“z” denotes the module slot (2 to 8).

Follow the Quick start video to learn how to Register and Configure any Digital I/O Module here.

[Digital Module Setup](#)

## XBE-DC16A Digital Input Module Wiring

XBE-DC16A Circuit Configuration			
Circuit Configuration	Top TB Description	I/O Direct Variable	Terminal Block Image
	00	%IX0.z.0	
	01	%IX0.z.1	
	02	%IX0.z.2	
	03	%IX0.z.3	
	04	%IX0.z.4	
	05	%IX0.z.5	
	06	%IX0.z.6	
	07	%IX0.z.7	
	Bottom TB Description	I/O Direct Variable	
	08	%IX0.z.8	
	09	%IX0.z.9	
	0A	%IX0.z.10	
	0B	%IX0.z.11	
	0C	%IX0.z.12	
	0D	%IX0.z.13	
	0E	%IX0.z.14	
0F	%IX0.z.15		
COM	n/a		
COM	n/a		

Note: Can be wired sinking or sourcing. In the I/O Direct Variable name, z=slot number.

## Environmental Specifications, all XGB Series Modules

Item		Specification	Reference	
Ambient Operating Temperature		0–55°C (32–131°F)	-	
Storage Temperature		-25–70°C (-13–158°F)		
Ambient Operating Humidity		5–95% relative humidity (non-condensing)		
Storage Humidity		5–95% relative humidity (non-condensing)		
Vibration <sup>1</sup>	Occasional Vibration	5 ≤ f < 8.4 Hz	IEC61131-3-2	
		8.4 ≤ f < 150Hz		
	Continuous Vibration	5 ≤ f < 8.4 Hz		
		8.4 ≤ f < 150Hz		
Shocks		Peak Acceleration		147 m/s <sup>2</sup> (15G)
		Duration		11ms
		Pulse Wave Type	Half-sine (3 times each direction per each axis)	
Noise Resistance	Square Wave Impulse Noise		1,500VAC 900VDC	LS Electric standard
	Electrostatic Discharge		Voltage: 4kV (contact discharge)	IEC61131-3-2 IEC61000-4-2
	Radiated Electromagnetic Field Noise		80–1,000 MHz, 10 V/m	IEC61131-3-2 IEC61000-4-3
	Fast Transient / Burst Noise	Classification	Voltage	IEC61131-3-2 IEC61000-4-4
		Power Supply	2kV	
Digital/Analog Input/Output Communication Interface		1kV		
Environment		Free from corrosive gases and excessive dust	-	
Attitude		Less than 2,000m		
Pollution Degree		Less than 2 (see note 2)		
Cooling Method		Air-cooling		

1 - Vibration of 10 times each direction (X, Y, and Z)

2 - Normally only nonconductive pollution occurs. Temporary conductivity caused by condensation is to be expected.



# XGB Series PLC Family

## Available I/O Modules

XGB Series I/O Modules									
Part Number	Price	Description	Digital Input	Digital Output	Analog Input	Analog Output	Motion	Bus Coupler Compatible	Smart Link Required
<b>Digital</b>									
<a href="#"><u>XBE-DC08A</u></a>	\$59.00	LS Electric XGB discrete input module, 8-point, 24 VDC, sinking/sourcing, 1 common(s), 8 point(s) per common. Removable terminal block included.	✓					✓	
<a href="#"><u>XBE-DC16A</u></a>	\$70.00	LS Electric XGB discrete input module, 16-point, 24 VDC, sinking/sourcing, 1 common(s), 16 point(s) per common. Removable terminal blocks included.	✓					✓	
<a href="#"><u>XBE-DC16B</u></a>	\$78.00	LS Electric XGB discrete input module, 16-point, 12-24 VDC, sinking/sourcing, 1 common(s), 16 point(s) per common. Removable terminal blocks included.	✓					✓	
<a href="#"><u>XBE-DC32A</u></a>	\$97.00	LS Electric XGB discrete input module, 32-point, 24 VDC, sinking/sourcing, 1 common(s), 32 point(s) per common. Requires XTB-40H terminal block and C40HH-xxSB-XBI cable.	✓					✓	✓
<a href="#"><u>XBE-AC08A</u></a>	\$88.00	LS Electric XGB discrete input module, 8-point, 120 VAC, 2 common(s), 4 point(s) per common. Removable terminal blocks included.	✓					✓	
<a href="#"><u>XBE-RY08A</u></a>	\$80.00	LS Electric XGB relay output module, 8-point, 125 VDC/250 VAC, (8) Form A, 1 common(s), 8 point(s) per common, 2A/point, 5A/common. Removable terminal block included.		✓				✓	
<a href="#"><u>XBE-RY08B</u></a>	\$95.00	LS Electric XGB relay output module, 8-point, 125 VDC/250 VAC, (8) Form A, 8 isolated common(s), 1 point(s) per common, 2A/point. Removable terminal blocks included.		✓				✓	
<a href="#"><u>XBE-RY16A</u></a>	\$110.00	LS Electric XGB relay output module, 16-point, 125 VDC/250 VAC, (16) Form A, 2 isolated common(s), 8 point(s) per common, 2A/point, 5A/common. Removable terminal blocks included.		✓				✓	
<a href="#"><u>XBE-TN08A</u></a>	\$60.00	LS Electric XGB discrete output module, 8-point, 12-24 VDC, sinking, 1 common(s), 8 point(s) per common, 0.5A/point, 2A/common. Removable terminal blocks included.		✓				✓	
<a href="#"><u>XBE-TN16A</u></a>	\$78.00	LS Electric XGB discrete output module, 16-point, 12-24 VDC, sinking, 1 common(s), 16 point(s) per common, 0.5A/point, 2A/common. Removable terminal blocks included.		✓				✓	
<a href="#"><u>XBE-TN32A</u></a>	\$109.00	LS Electric XGB discrete output module, 32-point, 12-24 VDC, sinking, 1 common(s), 32 point(s) per common, 0.2A/point, 2A/common. Requires XTB-40H terminal block and C40HH-xxSB-XBI cable.		✓				✓	✓
<a href="#"><u>XBE-TP08A</u></a>	\$62.00	LS Electric XGB discrete output module, 8-point, 12-24 VDC, sourcing, 1 common(s), 8 point(s) per common, 0.5A/point, 2A/common. Removable terminal blocks included.		✓				✓	
<a href="#"><u>XBE-TP16A</u></a>	\$88.00	LS Electric XGB discrete output module, 16-point, 12-24 VDC, sourcing, 1 common(s), 16 point(s) per common, 0.5A/point, 2A/common. Removable terminal blocks included.		✓				✓	
<a href="#"><u>XBE-TP32A</u></a>	\$93.00	LS Electric XGB discrete output module, 32-point, 12-24 VDC, sourcing, 1 common(s), 32 point(s) per common, 0.2A/point, 2A/common. Requires XTB-40H terminal block and C40HH-xxSB-XBI cable.		✓				✓	✓
<a href="#"><u>XBE-DN32A</u></a>	\$172.00	LS Electric XGB discrete combo module, Input: 16-point, 24 VDC, sinking/sourcing, Output: 16-point, 12-24 VDC, sinking, 0.2A/point, 2A/common. Requires XTB-40H terminal block and C40HH-xxSB-XBI cable.	✓	✓				✓	✓
<a href="#"><u>XBE-DR16A</u></a>	\$97.00	LS Electric XGB discrete combo module, Input: 8-point, 24 VDC, sinking/sourcing, Output: 8-point, 125 VDC/250 VAC, relay, (8) Form A (SPST) relays, 2A/point, 5A/ common. Removable terminal blocks included.	✓	✓				✓	
<b>Motion</b>									
<a href="#"><u>XBF-PN04B</u></a>	\$350.00	LS Electric XGB 4-axis positioning module, EtherCAT Master, 1 high-speed input point(s), sinking/line driver (differential), 1-channel, differential and single-ended encoder input(s), (1) Ethernet 100Base-TX (RJ45) port(s). For use with LS Electric XEM-DxxxHx PLCs.					✓		
<a href="#"><u>XBF-PN08B</u></a>	\$395.00	LS Electric XGB 8-axis positioning module, EtherCAT Master, 1 high-speed input point(s), sinking/line driver (differential), 1-channel, differential and single-ended encoder input(s), (1) Ethernet 100Base-TX (RJ45) port(s). For use with LS Electric XEM-DxxxHx PLCs.					✓		
<a href="#"><u>XBF-HO02A</u></a>	\$176.00	LS Electric XGB counter input module, 200 kHz maximum switching frequency, 2 high-speed input point(s), 5-24 VDC, sinking, 2-channel, single-ended encoder input(s), 2 high-speed output point(s), 5-24 VDC, sinking, external 24 VDC required.					✓	✓	✓
<a href="#"><u>XBF-HD02A</u></a>	\$253.00	LS Electric XGB counter input module, 500 kHz maximum switching frequency, 2 high-speed input point(s), 5-24 VDC, sinking, 2-channel, differential encoder input(s), 2 high-speed output point(s), 5-24 VDC, sinking, external 24 VDC required.					✓	✓	✓

Note: See "Smart Link I/O System" on page tLSE-131 for the XTB-40H terminal block and cables. See "XGB PLC Replacement Terminals" on page tLSE-149 for replacement removable terminal blocks.

Continued on next page