

T1K–DEVNETS Think & Do Setup

In This Appendix. . . .
— T1K–DEVNETS T & D Setup


T1K-DEVNETS Think & Do Setup

For those who are using the T1K-DEVNETS as a slave with Think & Do Studio, the following example shows how to setup Think & Do on your network.

T & D Studio setup for PC control


Use the following procedure to setup the T1K-DEVNETS adapter with Think & Do Studio. Be sure that the Node Address switches have been set to a proper address.

1. Click on Add Driver and SST card is installed.
2. Set MAC ID to 62.
3. Set baud rate (500K, SW1-1 OFF, -2 ON, in this example).
4. Set scanner interval to 0.
5. Set timeout shutdown to 5.
6. EDS not needed.

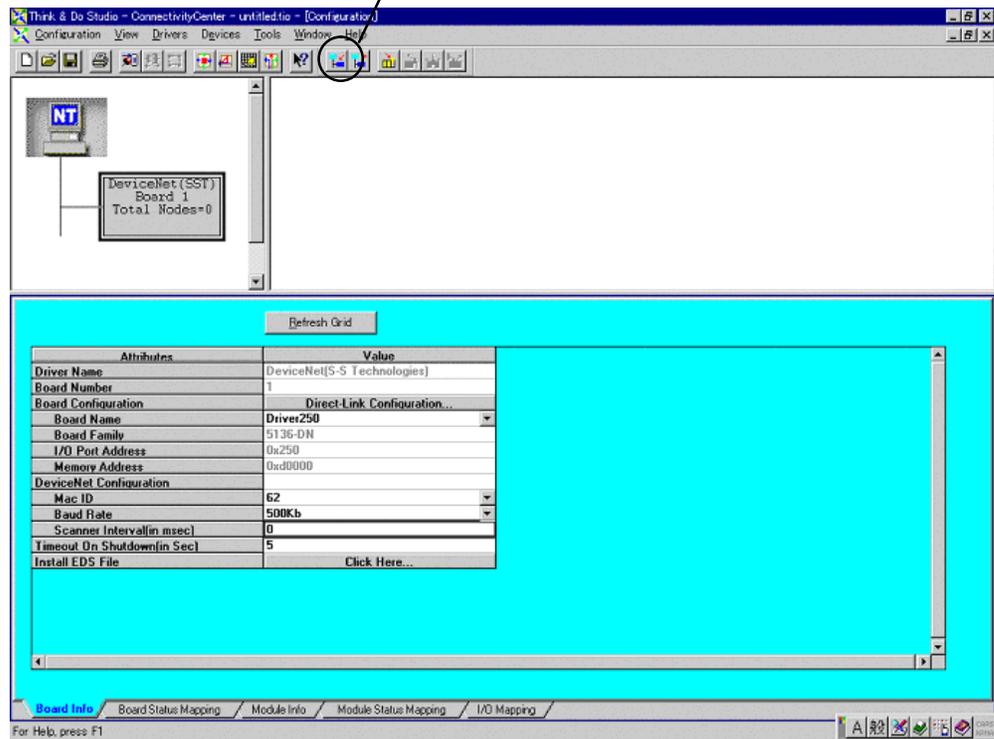

7. Click on connection.

Think & Do will display T1K-DEVNETS MacID-2. Inputs and outputs are displayed.

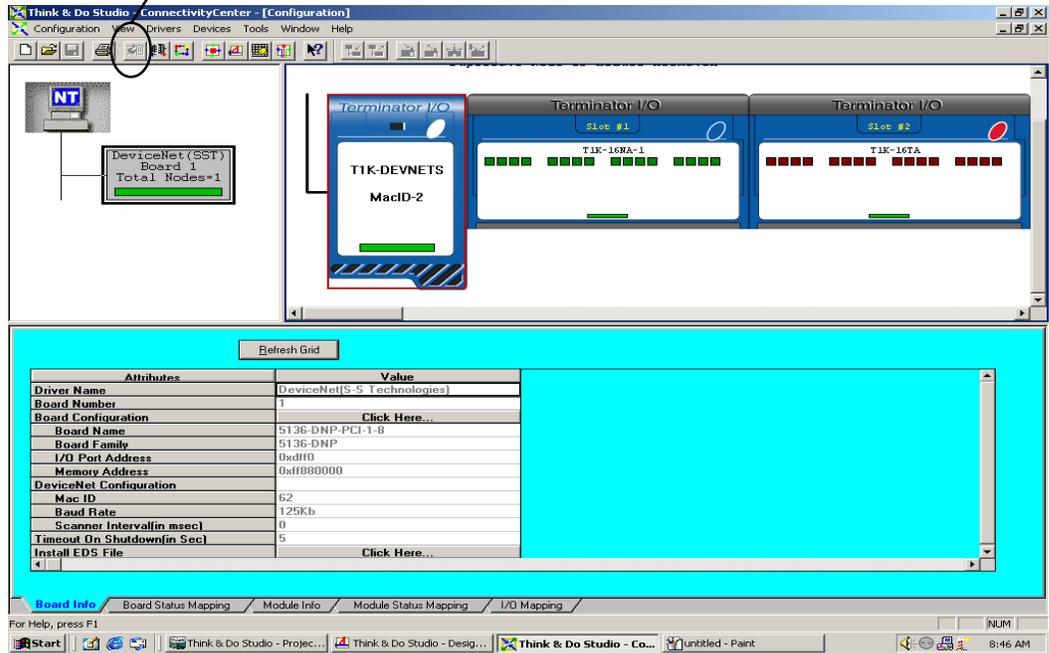

8. Click on Scan and communication will begin.

