



# Nickel-Plated Brass Push-to-Connect Fittings

Part No. [UY532-B](#)

**NITRA** pneumatic push-to-connect union Y fittings with nickel plated-brass body and stainless steel tube gripping claws. For use with flexible tubing. Five fittings per package.

- Performs well in harsh duty or washdown applications
- Working Pressure 0 to 300 psi
- Working Temperature 0 to 175°F (-17.8 to 79.4°C)

NITRA™ Nickel-Plated Brass Union Y					
Imperial Tube					
Part No.	Size	Price	Drawing Link	Qty. per pack	Weight (lb)
<a href="#">UY532-B</a>		\$43.50	<a href="#">PDF</a>	5	0.15
<a href="#">UY14-B</a>		\$49.00	<a href="#">PDF</a>	5	0.29
<a href="#">UY38-B</a>		\$76.00	<a href="#">PDF</a>	5	0.63
Metric Tube					
<a href="#">UY6M-B</a>		\$49.00	<a href="#">PDF</a>	5	0.27
<a href="#">UY8M-B</a>		\$57.00	<a href="#">PDF</a>	5	0.38

Part No. [PR14-532-B](#)

**NITRA** pneumatic push-to-connect plug-in reducer fittings with nickel plated brass body and stainless steel tube gripping claws. For use with flexible tubing. Five fittings per package.

- Performs well in harsh duty or washdown applications
- Working Pressure 0 to 300 psi
- Working Temperature 0 to 175°F (-17.8 to 79.4°C)

NITRA™ Nickel-Plated Brass Plug-In Reducer					
Imperial Tube					
Part No.	Size	Price	Drawing Link	Qty. per pack	Weight (lb)
<a href="#">PR14-532-B</a>	(1) 1/4in plug-in x (1) 5/32in (4mm) push-to-connect	\$10.00	<a href="#">PDF</a>	5	0.09
<a href="#">PR38-14-B</a>	(1) 3/8in plug-in x (1) 1/4in push-to-connect	\$13.50	<a href="#">PDF</a>	5	0.17
Metric Tube					
<a href="#">PR6M-4M-B</a>	(1) 6mm plug-in x (1) 5/32in (4mm) push-to-connect	\$10.00	<a href="#">PDF</a>	5	0.09
<a href="#">PR8M-6M-B</a>	(1) 5/16in (8mm) plug-in x (1) 6mm push-to-connect	\$12.50	<a href="#">PDF</a>	5	0.13




# Nickel-Plated Brass Push-to-Connect Fittings


**NITRA** nickel-plated brass push-to-connect fittings are an excellent choice for many industrial applications. They have an attractive, easily maintained finish and have a higher pressure and temperature rating when compared to resin fittings.

## Features

- Large selection of fitting configurations
- Inch and metric sizes available
- Hybrid Inch to metric conversion fittings available
- NPT, BSPT (R) and BSPP (G) threads available
- Nickel-plated brass bodies, threads and release rings
- Threaded elbow and tee bodies can be rotated after installation
- For use with air and water
- Working pressure 0 to 300 psi
- Working Temperature 0 to 175°F (-17.8 to 79.4°C)

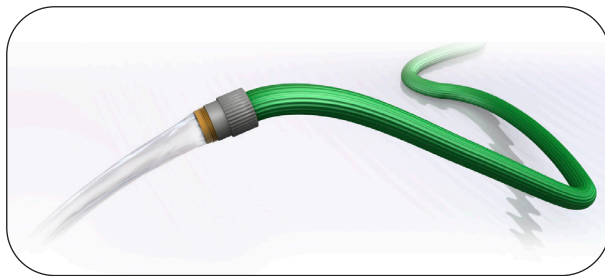

**Ideal for washdown and harsh environments**

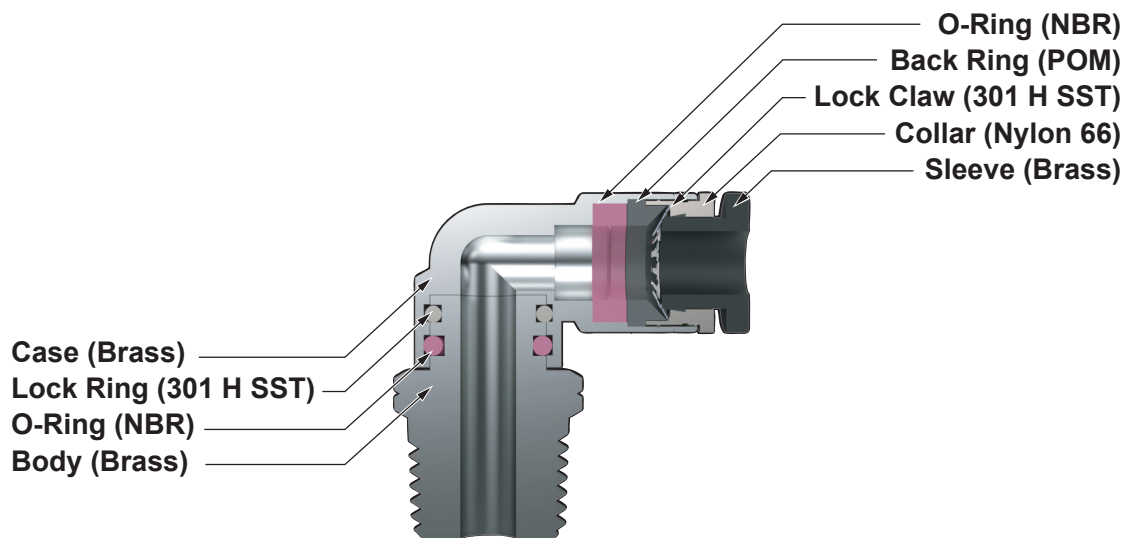

*Fitting Cut-away Diagram*