

# RHINO PSP24-REM240S Redundancy Module

The PSP24-REM240S redundancy module used with two matched power supplies creates redundancy to help prevent costly downtime due to power supply failure. The PSP24-REM240S decouples the outputs of the two connected power supplies so that in case of failure, one power supply cannot overload the other.




## PSP Redundancy Module

Part Number	Price	Drawing Link	Input Voltage Range	Max Power per Input	Output Voltage	Output Current Max.	Connection
<b>PSP24-REM240S</b>	\$67.00	<a href="#">PDF</a>	2 x 5 – 60 VDC	144W	V in - 0.9 VDC	8 A	Detachable screw terminal block


## PSP24-REM240S General Specifications

<b>Temperature</b>	Operating: -10 to 70°C max [14 to 158°F max], Storage: -25 to 85°C max, [-13 to 185°F max], Cooling: Natural air convection
<b>Parallel Operation</b>	(2) matched power supplies per module. Maximum power shall not exceed 200 watts per input.
<b>Electromagnetic Compatibility</b>	In correspondence with connected power supplies
<b>Enclosure Material</b>	Gray plastic, FR2010-110C [UL94 V-0 rated]
<b>Mounting</b>	Built-in snap-on connection for 35mm DIN rail or surface mount adapter included
<b>Indication</b>	Green LED for Output ON
<b>Connections</b>	Plug-in screw terminals, 0.5 to 0.7Nm [4.5 to 6.2lb-in] recommended tightening torque, wire stripping length 7-8mm
<b>Wire Size range</b>	24 to 12 AWG [0.21 to 3.16 mm²]
<b>Agency Approvals</b>	UL/cUL 508 listed; File No. E197592, CE

### Redundancy Module Function Diagram

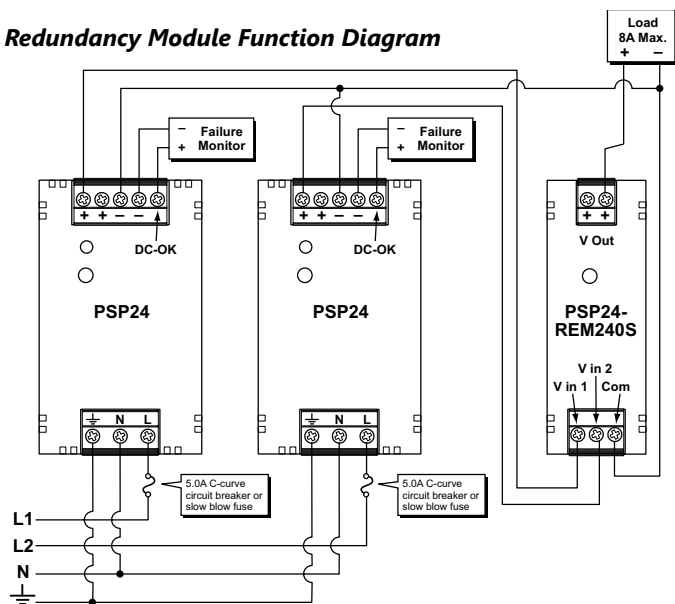

### Redundancy Module Connector Positions

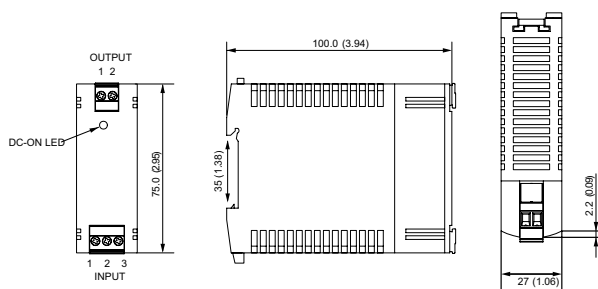

### Recommendations for redundant PSP Series power supply applications:

- With no load connected, adjust the output voltage of both power supplies to the same value.
- Use separate input over-current protection for each power supply.
- When possible, connect the input power to each power supply to different phases or circuits.
- When available on the connected power supplies, use the DC-OK output and/or DC-ON LED on each power supply to monitor for failure. (PSP05-020S, PSP12-024S and PSP24-024x do not have DC-OK output).
- Connect all output leads together at a single distribution node using leads having the same length and cross section.

Input		Output	
1	+Vin1	1	+Vout
2	+Vin2	2	+Vout
3	Common		