



Stepper Systems

Complete SureStep system in 4 components: Power Supply, Stepper Drive, Motor Extension Cable, Motor. Standard Drives (pulse and direction input; DIP-switch configuration) and Advanced Drives (communication/analog control and setup) are available.

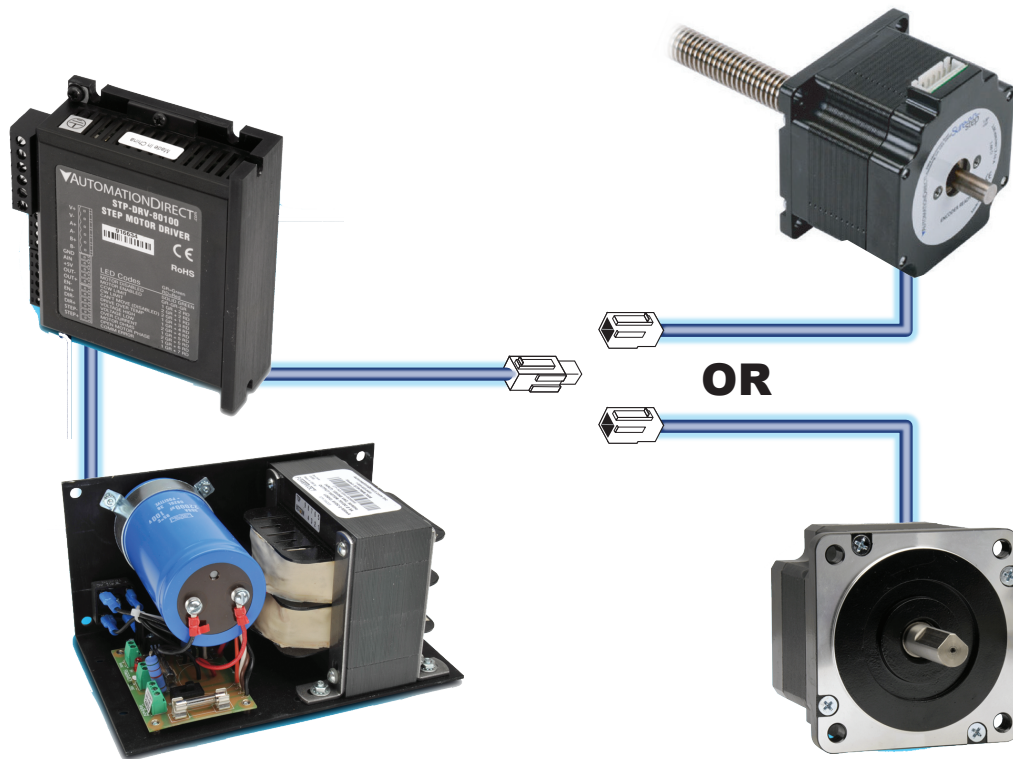

Complete SureStep system in 2 components: Power Supply and Integrated Stepper Motor/Drive. Standard Motor/Drives (pulse and direction input; DIP-switch configuration) and Advanced Motor/Drives (communication/analog control and setup) are available.

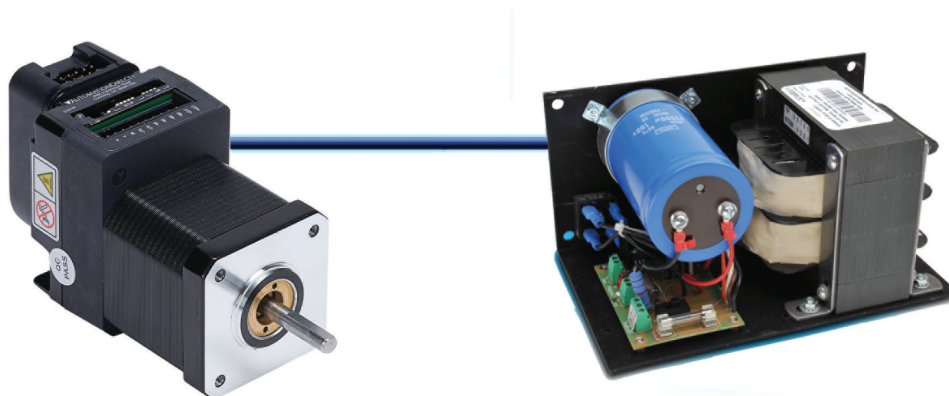



Stepping System Overview

High-performance microstepping drives with high-torque stepping motors

SureStep stepping systems provide simple and accurate control of position and speed. Pulses (or "step" and "direction" signals) from an AutomationDirect PLC or other indexer and motion controller are "translated" by the microstepping drive into precise movement of the stepping motor shaft. The SureStep stepping motors use 2-phase technology with 200 full steps per revolution or 1.8° per full step. Older type stepping motor drives, which operate stepping motors in full step mode, can result in stalling or lost motion due to potential problems with low speed mechanical vibration (usually between 100 to 200 RPM). To minimize this vibration problem, the SureStep microstepping drives use advanced microstepping technology to smooth the motor motion and stepping response. The SureStep family has options for open loop control (no encoder), position monitoring (external encoder feedback), and inclusive position verification (integrated motor/drives with internal encoder). Inclusive position verification provides for stall prevention and detection along with position completion after a temporary stall.

SureStep stepper drives support a wide range of selectable microstep resolutions, from 200 steps per revolution (full step) to 51,200 (full step ÷ 256) steps per revolution, depending on model.

The advanced drives can operate with traditional high-speed inputs, but can also be commanded via 0–5V analog input. They have an internal indexer that can accomplish point-to-point moves controlled via ASCII communication.

FREE configuration software!

SureMotion Pro software is available that makes setting parameters a snap for the advanced drives and advanced integrated motor/drives! SureMotion Pro replaces SureStep Pro configuration software. Download free from our website:

<https://support.automationdirect.com/products/surestep.html>

Standards and Agency Approvals

How fast can my system go?

| Maximum Potential Speed Chart (rpm) * | | | | | |
|---------------------------------------|------------------|---------------------------------------|----------------|----------------|------------------|
| PLC | | SureStep Drive Steps/Rev Selection ** | | | |
| Model | Max Output (kHz) | 400 Steps/Rev | 1000 Steps/Rev | 2000 Steps/Rev | 10,000 Steps/Rev |
| DL05, DL105 | 7 | 1,050 | 420 | 210 | 42 |
| DL06 | 10 | 1,500 | 600 | 300 | 60 |
| H0/H2/H4/T1H-CTRIO | 25 | >2,500*** | 1,500 | 750 | 150 |
| H2-CTRIO2 | 250 | >2,500*** | | | 1,500 |
| P2-HSO | 1000 | >2,500*** | | | |
| P3-HSO | 1000 | >2,500*** | | | |
| BRX | 2000 | >2,500*** | | | |

* These speeds are theoretical maximums. See torque curves of specific motors for their rpm limits.

** Full step (200 steps/rev) will allow higher top speed.

Full stepping, however, can create vibration at low speed.

*** Typical stepper systems do not run faster than 2500 rpm.

Stepping Motor RPM = (A ÷ B) x (60 seconds/minute)


Where: A = PLC output frequency (pulses per second)
B = microstepping resolution selection (steps/revolution)

| Maximum RPM = | | Steps/Sec A | ÷ | Steps/Rev B | x | Sec/Min |
|--|---------|----------------|---|----------------|---|---------|
| Example 1: | 1,500 = | 10,000 | ÷ | 400 | x | 60 |
| DL06 with 10 kHz Built-in Pulse Output | | | | | | |
| Example 2: | 3,750 = | 25,000 | ÷ | 400 | x | 60 |
| Hx-CTRIO with 25 kHz Pulse Output | | | | | | |

Stepping System Overview



Two or Four components to make a complete system

Choose an integrated motor/drive and power supply

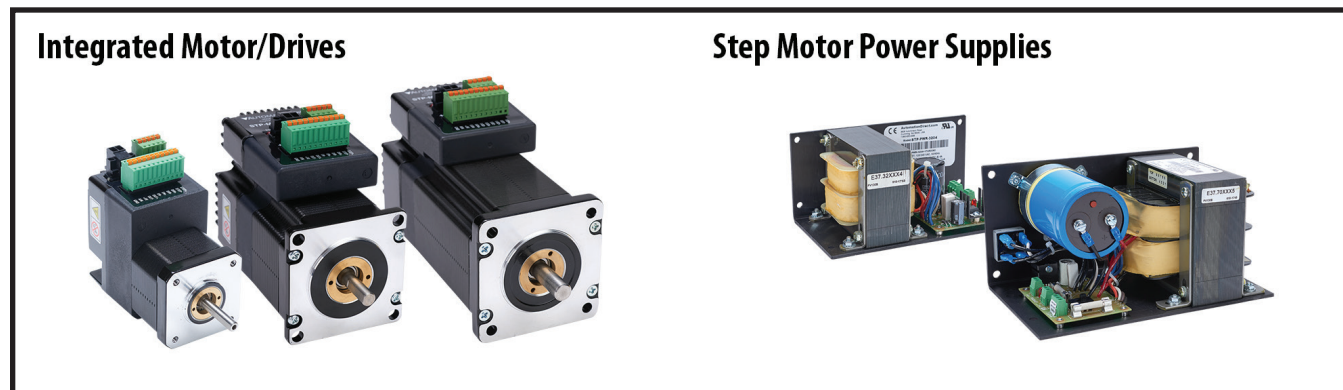

OR ...

Choose a separate drive, motor, motor extension cable and power supply

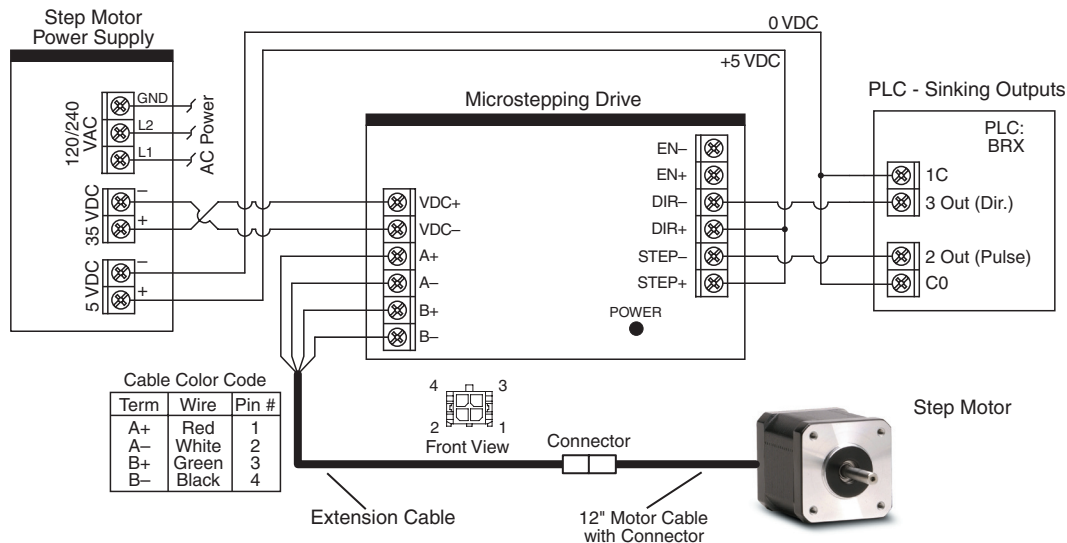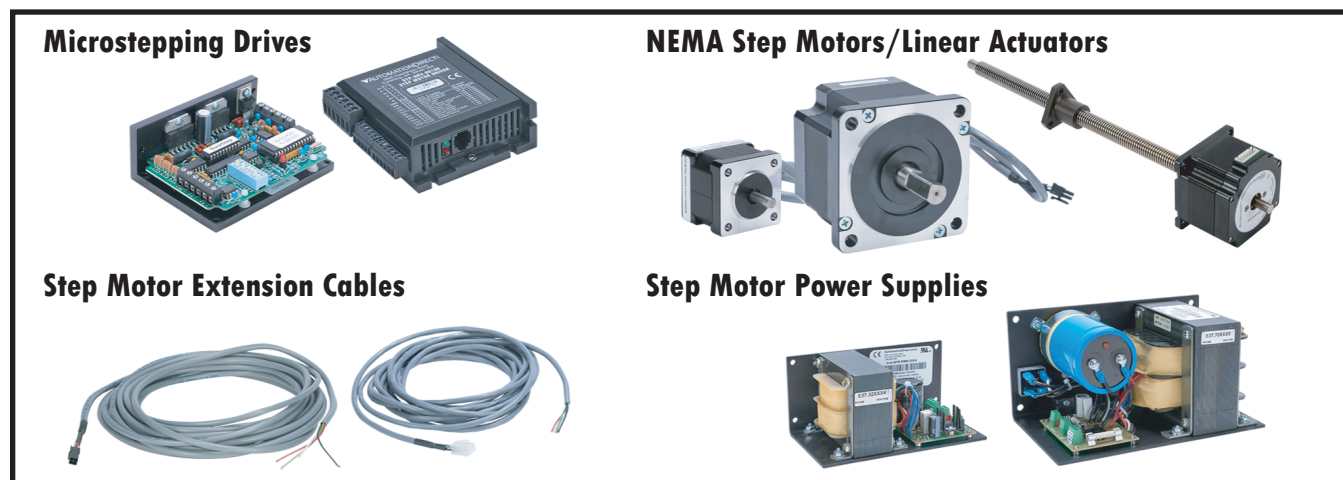


Stepping System Overview

NEMA frame stepping motors


The SureStep stepping family has a wide variety of high-torque motors to handle a wide range of automation applications such as woodworking, assembly, and test machines. The motors are available in both single-shaft and dual-shaft configurations, with or without an encoder. Our square frame or "high-torque" style stepping motors are the latest in bipolar technology, resulting in very high torque to volume ratios. We have NEMA 14, 17, 23, 34, and 42 size motors with holding torque ranging from 8 to 4532 oz-in. Wash down "W" motors (IP65) are also available. Optional 6, 10, or 20-foot extension cables with locking connectors are available to interface any of the stepping motors to the microstepping drive, except the NEMA 23 and NEMA 34 STP-MTRAC-x motors. Those MTRAC motors have an integrated 10-foot pigtail cable. The

extension cables can be easily cut to length, if desired. Integrated motor/drives and separate motors with an "E" in their part number include an encoder for position feedback. The MTRAC motors are designed to work with 115 or 230 VAC powered drives and can withstand high voltages. This allows higher torque, especially at higher speeds.

**Low Voltage
Low Torque Motors (MTRL)**




**Low Voltage
High Torque Motors (MTR)**

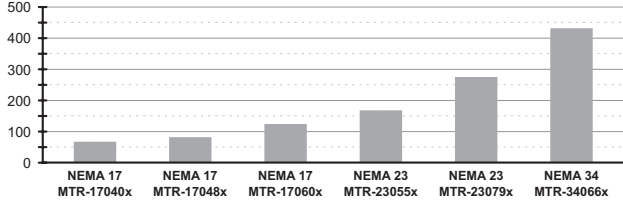


Note that the integrated motor/drive systems have a lower maximum torque due to heat constraints with the drive connected to the motor. For solutions requiring the highest torque, use the systems with our NEMA MTRH (low voltage, higher torque) or MTRAC (high voltage, high torque) motors.


**Low Voltage
Higher Torque Motors (MTRH)**

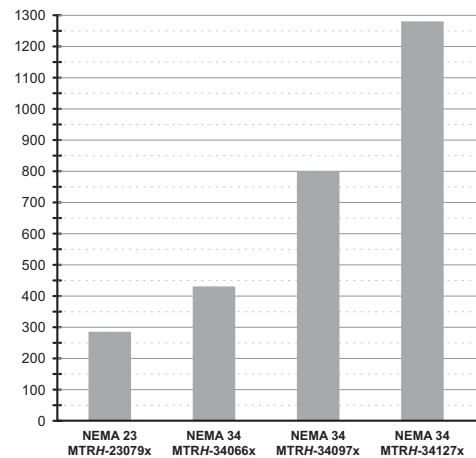


Integrated Motors/Drives (MTRD)

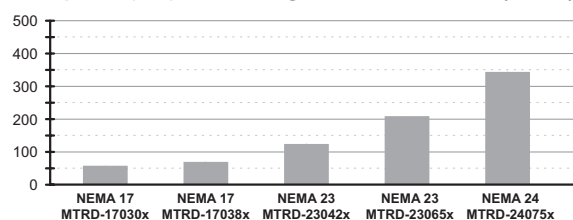

**High Voltage
High Torque Motors (MTRAC)**

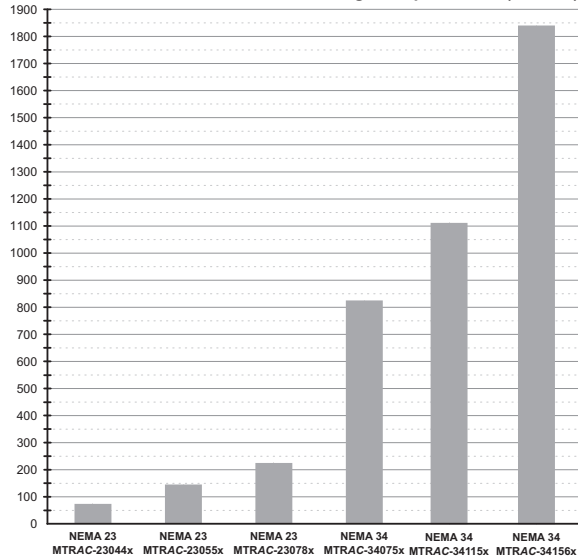

**Higher Voltage
High Torque Motors (MTRACH)-42xxx**

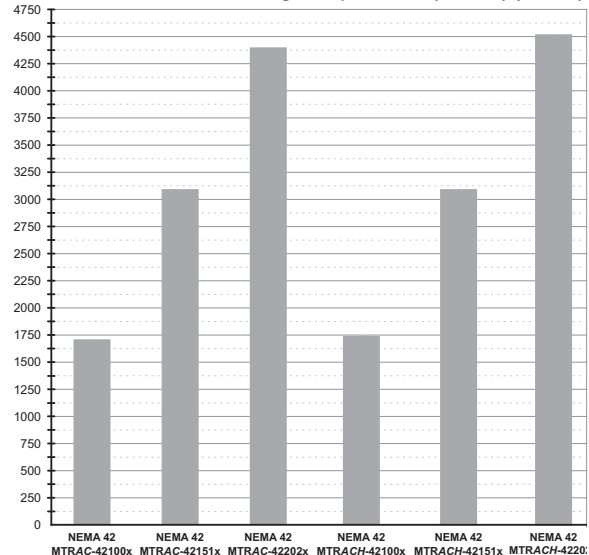


Note: While possessing similar holding torques, the MTRACH motors have much higher torque at high speeds than the MTRAC motors.



Stepping System Overview

NEMA frame stepping motors, continued

SureStep Stepper Linear Actuators combine all the great features of our stepper motors with a lead screw as the motor's shaft. NEMA 17 and 23 frame size motors are available with leads from 1.25mm/rev to 1inch/rev.

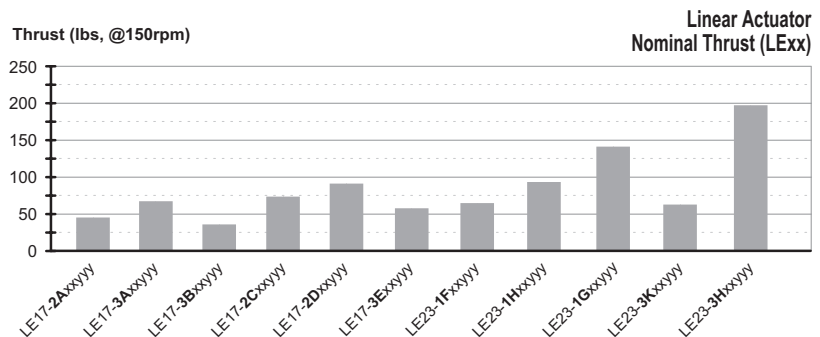

High-performance microstepping drives

SureStep microstepping drives

(STP-DRV-4035, -4830, -4845, -6575, & STP-MTRD-x)

- Standard high-speed pulse input (pulse and direction)
- On-board or removable screw terminals for easy hook-up
- Optically-isolated inputs ready for +5VDC logic from AutomationDirect PLCs, or 5–24 VDC (depending on model)
- No software or add-on resistors required for drive configuration; dipswitch and/or rotary-dial setup
- Dipswitch used for built-in self-test, microstep resolution selection, current level selection, and optional idle current reduction.
- Optional external encoder feedback for integrated models

SureStep high bus voltage microstepping drives

(STP-DRVAC-24025)

- Auto-setup measures motor parameters and configures motor current control and anti-resonance gain settings
- Uses universal AC input 90 to 240 VAC, AC input voltage must be selected by switch
- Switch selectable microstep resolution, 16 settings from 200 to 25600 steps/rev
- Switch configurable running current, anti-resonance, input signal filter, step smoothing filter, and self test
- Motor selection via 16-bit rotary switch

SureStep advanced microstepping drives

(STP-DRV-4850, STP-DRV-80100, & STP-MTRD-xR)

All the features of the standard high-performance drive, plus:

- Software configurable
- 200 - 51,200 microsteps (software selectable)
- High-speed pulse input (Quadrature, cw/ccw, pulse/direction)
- Analog velocity mode (0-5v or potentiometer)
- Internal indexer (point-to-point moves via ASCII command)
- AB quadrature/encoder following for all advanced models
- Advanced "E" integrated models contain a built-in encoder (encoder is not accessible and not available for signaling outside the drive)

Power supplies

- SureStep linear power supplies, 32V @ 4A, 48V @ 5A, 48V @ 10A, 70V @ 5A
- Input and output fuses included on power supplies
- Includes 5 VDC Logic supply for all low voltage signals
- Switching power supplies also available (12V, 24V, 48V)



Choose your SureStep System

1. Choose a motor

Determine the torque and speed required by your application. Then look at the motor speed-torque curves in the Motors and Standard Integrated and Advanced Integrated sections of this catalog chapter, or the thrust-speed curves for Linear Actuators. Choose a standalone or integrated motor or linear actuator that can run your application with plenty of speed and torque/thrust reserve (most stepper systems should have a 100% safety margin for torque/thrust). If encoder feedback is desired, be sure to choose a "D" or "E" model motor, or "ADJ" model actuator. If an IP65 rating is desired, choose a "W" motor (no IP65 linear actuator models available at this time).

Note: If you chose an Integrated motor/drive, you can skip to "Choose a Power Supply". If you chose an STP-MTRAC-23xxx or -34xxx motor, you are done. These motors use the STP-DRVAC-24025 drive, have no motor extension cable (10' leads on the motor), and require no power supply (the drive uses AC input power).

Note: The STP-MTRAC-42xxx motors cannot use the [STP-DRVAC-24025](#) drive as it doesn't provide enough current.

NEMA 14, 17, 23, 34, and 42 mounting flanges

Variety of bipolar step motors to cover a wide range of applications


Holding torque ranges from 8 to 4532 oz-in

Single-shaft, Dual-shaft, IP65, high bus voltage, and encoder-mounted models available (Linear series does not have high bus voltage or IP65 models)

1-ft cable with locking connector on the end (not for linear actuators) (NEMA 23/34 MTRAC motors have 10' leads)

Square frame style produces high torque and achieves best torque-to-volume ratio

NEMA 17, 23 and 24 integrated motor/drives

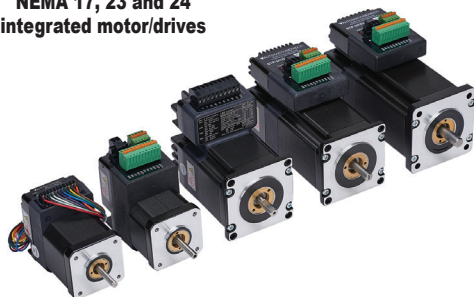

NEMA 17 and 23 linear actuators



NEMA 42 MTRAC(H)



2. Choose a motor extension cable

[If you chose an Integrated motor/drive in Step 1, skip to "Choose a Power Supply"; an extension cable is not required.]

Our 6-, 10-, and 20-ft motor extension cables have a locking connector that mates up to the motor cable. The extension cables allow you to quickly connect the motor to the drive without having to splice wires or cut any cables.

Note: All NEMA 23/34 STP-MTRAC-x motors have integrated 10-foot cables and don't need an extension cable.

20-foot extension cable with locking connector



SureStep Motor / Cable Compatibility

| Motor | Cable |
|---------------------------------|-----------------|
| STP-LE17 series linear actuator | STP-LA-EXT17-xx |
| STP-LE23 series linear actuator | STP-LA-EXT23-xx |
| STP-MTR-xxxx | STP-EXT-0xx |
| STP-MTR-xxxxW | STP-EXTW-0xx |
| STP-MTRAC-23xxx/34xxx | None |
| STP-MTRAC-42xxx | STP-EXT42-0xx |
| STP-MTRACH-42xxx | STP-EXT42H-0xx |
| STP-MTRH-xxxx | STP-EXTH-0xx |
| STP-MTRH-xxxxW | STP-EXTHW-0xx |
| STP-MTRL-xxxx | STP-EXTL-0xx |

3. Choose a drive


Note: If you chose an Integrated motor/drive in Step 1, skip to "Choose a Power Supply" ... you have already chosen your drive. If you chose STP-MTRAC-23xxx or STP-MTRAC-34xxx, you are done - these motors use the STP-DRVAC-24025 drive and don't require an extension cable or DC power supply.

Note: The STP-MTRAC-42xxx motors cannot use the STP-DRVAC-24025 drive as it doesn't provide enough current.


The chart below is a quick selection guide. For a full list of features, check out the Technical Info later in this chapter. The requirements for what you will need from a drive are determined by your applications. Deciding whether you plan to operate the drive via high-speed pulses, analog control, encoder following, or communication commands is an important factor. The voltage supplied to the drive as determined by the speed torque curves is another important factor to consider when choosing a drive. If you need to select a drive based on RMS step motor phase current, please see the next page.

- Standard and Advanced Drives and Integrated Motor/Drives can accept high-speed pulse input control.
- Advanced Drives and some Integrated Motor/Drives can also accept serial communication control.
- STP-MTRAC-23xxx and -34xxx and STP-DRVAC motors and drives are designed for use with high voltages. These components are not designed to work at low voltages (12V, 32V, 48V, 70V).

STP-DRV Series

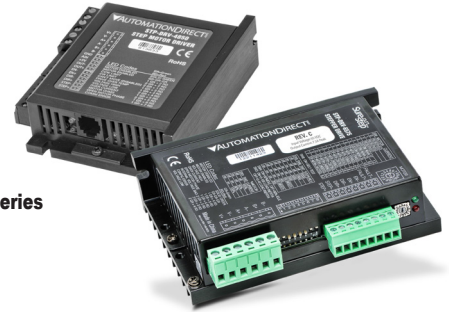

STP-MTRD Series

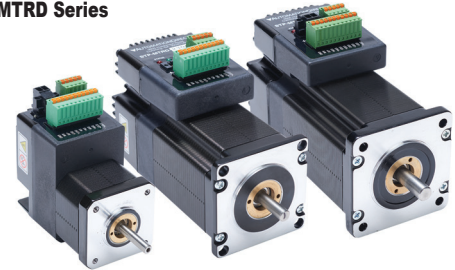

| What you need | STP-DRV-4035 | STP-DRV-4845 | STP-DRV-4850 | STP-DRV-6575 | STP-DRV-80100 | STP-MTRD-17x(E) | STP-MTRD-23x(E) | STP-MTRD-17xR(E) | STP-MTRD-23xR(E) | STP-MTRD-24xRV(E) |
|--|-----------------|--------------|-----------------|--------------|-----------------|-----------------|-----------------|------------------|------------------|-------------------|
| 12V Speed-Torque Curve (from Step 1) | – | – | – | – | – | ✓ | ✓ | ✓ | ✓ | ✓ |
| 32V Speed-Torque Curve (from Step 1) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 48V Speed-Torque Curve (from Step 1) | – | ✓ | ✓ | ✓ | ✓ | – | ✓ | – | ✓ | ✓ |
| 70V Speed-Torque Curve (from Step 1) | – | – | – | – | ✓ | – | ✓ | – | ✓ | ✓ |
| More than 3.5A/motor phase | – | ✓ | ✓ | ✓ | ✓ | – | – | – | – | – |
| More than 5A/motor phase ("H" motors) | – | – | – | ✓ | ✓ | – | – | – | – | – |
| Supply voltage | 12–32 | 24–48 | 24–48 | 24–65 | 24–80 | 12–48 | 12–70 | 12–48 | 12–70 | 12–70 |
| Digital Input Voltage | 5V (12V*, 24V*) | 5–24V | 5V (12V*, 24V*) | 5–24V | 5V (12V*, 24V*) | 5–24V | 5–24V | 5–24V | 5–24V | 5–24V |
| Internal Indexing (Drive can move from point A to point B with a serial communication command) | – | – | ✓ | – | ✓ | – | – | ✓ | ✓ | ✓ |
| High-speed pulse input | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Analog Velocity input | – | – | ✓ | – | ✓ | – | – | ✓ | ✓ | ✓ |
| Position Verification (internal encoder) | – | – | – | – | – | – | – | E models only | E models only | E models only |
| External encoder | – | – | – | – | – | E models only | E models only | – | – | – |
| RS-232 communication (ASCII) | – | – | ✓ | – | ✓ | – | – | – | – | – |
| RS-485 communication (ASCII) | – | – | – | – | – | – | – | ✓ | ✓ | ✓ |
| Variable I/O (I/O can be either a digital input or digital output) | – | – | – | – | – | – | – | – | – | ✓ |

* External dropping resistor required for 12V and 24V I/O use. See Product Data Sheet for wiring details and resistor values.



Choose your SureStep System

3a. Using RMS Step Motor Phase Current to Select an Appropriate Stepper Drive Rated in Peak Phase Current


$$(\text{Drive Amps})_{\text{peak}} = 1.2 \times (\text{Motor Amps})_{\text{RMS}}$$

Generic stepper drives usually have output current specified in peak phase current while stepper motors will have their phase current specified in RMS phase current. This can cause sub-optimal drive to motor pairing unless this is understood. There is no need to understand this difference if you are selecting a system that uses the SureStep drives that are tuned for specific SureStep motors. These drives will have a rotary switch setting (STP-DRV-6575 and STP-DRVAC-24025) or a motor selection in the SureMotion Pro software (STP-DRV-4850 and STP-DRV-80100). These drives when properly paired with a SureStep motor will output 1.2 times the motor rated phase current.

When choosing a drive that only has current selections instead of motor specific selections you will want to select a peak current that is 1.2 times the motor's listed RMS current. The true peak drive current value would be 1.4 times the RMS motor value but this amount of current will cause a lot of motor heating and the torque at higher speeds will actually suffer with due to higher back electro-magnetic force caused by the inductive field of the coils changing polarity quickly.

Example of a SureStep matched stepper system

To use an STP-MTR-23055 motor with a STP-DRV-6575 drive, the drive's rotary switch should be positioned to selection 9 (STP-MTR-23055x). The STP-MTR-23055 has a phase current of 2.8 A (RMS), so the drive will actually output $1.2 \times 2.8 \text{ A (RMS)} = 3.36 \text{ A}$ (peak). You do not need to calculate peak or RMS current with a pre-configured SureStep motor and drive system.

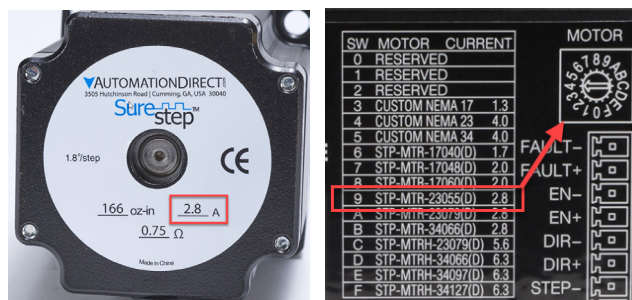


Matched stepper system

Example of an adjustable current stepper drive

To use an STP-MTR-23055 motor with a STP-DRV-4845 drive, you should calculate the correct phase current setting for the drive. The motor phase current is 2.8 A (RMS).

- If you do not understand peak vs RMS current, you would select phase current position #8, the 2.8 A selection on the drive (blue box). This setting will work (and the motor will run very cool) but will provide slightly less than the motor's rated torque.
- If a true peak current value is selected ($1.4 \times 2.8 \text{ A} = 3.92 \text{ A}$) then the rotary switch selection would be set to the C position (red box). This will cause excessive motor heating and a lack of performance at higher speeds.
- The optimal phase current selection for stepper motors is 1.2 times the motor RMS phase current ($1.2 \times 2.8 \text{ A (RMS)} = 3.36 \text{ A (peak)}$). This will be the rotary switch selection A (green box).

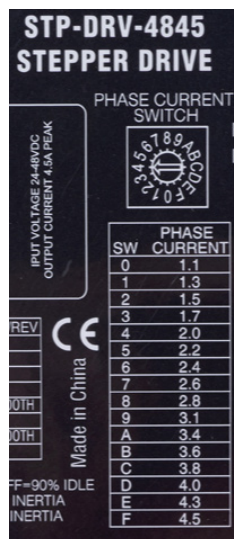

| Rotary Switch Position | SW1 & SW2 @100% | SW1 & SW2 @90% | SW1 & SW2 @80% |
|------------------------|-----------------|----------------|----------------|
| 0 | 1.1 | 1.0 | 0.9 |
| 1 | 1.3 | 1.2 | 1.0 |
| 2 | 1.5 | 1.4 | 1.2 |
| 3 | 1.7 | 1.5 | 1.4 |
| 4 | 2.0 | 1.8 | 1.6 |
| 5 | 2.2 | 2.0 | 1.8 |
| 6 | 2.4 | 2.2 | 1.9 |
| 7 | 2.6 | 2.3 | 2.1 |
| 8 | 2.8 | 2.5 | 2.2 |
| 9 | 3.1 | 2.8 | 2.5 |
| A | 3.4 | 3.1 | 2.7 |
| B | 3.6 | 3.2 | 2.9 |
| C | 3.8 | 3.4 | 3.0 |
| D | 4.0 | 3.6 | 3.2 |
| E | 4.3 | 3.9 | 3.4 |
| F | 4.5 | 4.1 | 3.6 |

Matching an adjustable stepper drive with any step motor

Choose your SureStep System

4. Choose a power supply

Since all low voltage SureStep (non-integrated) motors can operate at 32V, 48V, and 70V, the selection of a power supply is dependent on the selected speed-torque curve of the motor and on the selection of drive. If using an integrated motor/drive, then the power supply is dictated by the specifications of the integrated product. If using an STP-MTRAC-23xxx or -34xxx drive, no DC power supply is needed since the drive is powered directly from 115 to 230 VAC. Choose a power supply that matches the desired speed-

torque curve and stays within the voltage limit of the selected drive. Each SureStep linear power supply has incoming AC and outgoing DC fusing. The linear supplies have an electronic overload protected 5V supply for all your logic needs. Stepper applications without large fluctuations in load, without aggressive deceleration, and without regeneration (where the load pushes the motor) can often use a switching power supply instead.

Permissible Drive/Power Supply Combinations

| DC Powered Drive | Linear Power Supply | | | | Switching Power Supply | | |
|--|---|---------------------|---------------------|---------------------|------------------------|-------------------|-------------------|
| | <u>STP-PWR-3204</u> | <u>STP-PWR-4805</u> | <u>STP-PWR-4810</u> | <u>STP-PWR-7005</u> | <u>PSB12-xxxS</u> | <u>PSB24-xxxS</u> | <u>PSB48-xxxS</u> |
| STP-DRV-4830 12-48 VDC input (53V max) | √ | √ | √ | – | √ | √ | √ |
| STP-DRV-4845 24-48 VDC input (60V max) | √ | √ | √ | – | – | √ | √ |
| STP-DRV-4850 24-48 VDC input (53V max) | √ | √ | √ | – | – | √ | √ |
| STP-DRV-6575 24-65 VDC input (85V max) | √ | √ | √ | – | – | √ | √ |
| STP-DRV-80100 24-80 VDC input (88V max) | √ | √ | √ | √ | – | √ | √ |
| STP-MTRD-17 series 12-48 VDC input (55V max) | √ | √ | √ | – | √ | √ | √ |
| STP-MTRD-23, -24 series 12-70 VDC input (75V max) | √ | √ | √ | √ | √ | √ | √ |
| Supply current calculation | For systems that use multiple steppers and only one power supply, the power supply current must be at least the sum of 2/3rds of the combined motor currents: $I(ps) \geq 2/3 \times (I_{motor1} + I_{motor2} + I_{motor3} + \dots)$ | | | | | | |

Linear Power Supply

120 or 240 VAC, 50/60 Hz
power input (switch
selectable)


Screw terminal AC input and
DC output connections

32V, 48V and 70V
linear supplies

Power ON LEDs

unregulated
linear supplies
perfect for
stepper systems

Input and output
fusing included

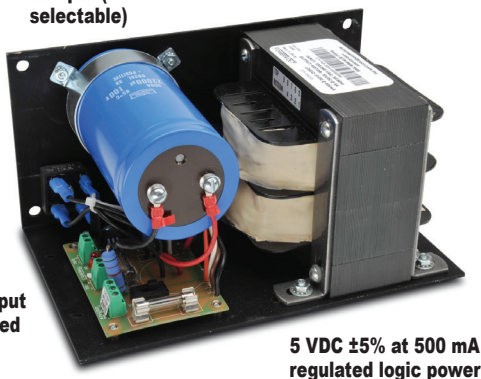

5 VDC ±5% at 500 mA
regulated logic power

Switching Power Supply

85-264 VAC
(DC input range 120-375 VDC)

Rugged plastic or
aluminum housings with
integral 35mm DIN rail
mounting adapters

Adjustable
output voltage



Output voltage status LED


DC Output Overload and Short-Circuit
Protected

Note: For detailed information on the switching power supplies, please see:
<https://cdn.automationdirect.com/static/specs/rhinopsbc1d2.pdf>



Stepping System Components

SureStep® System

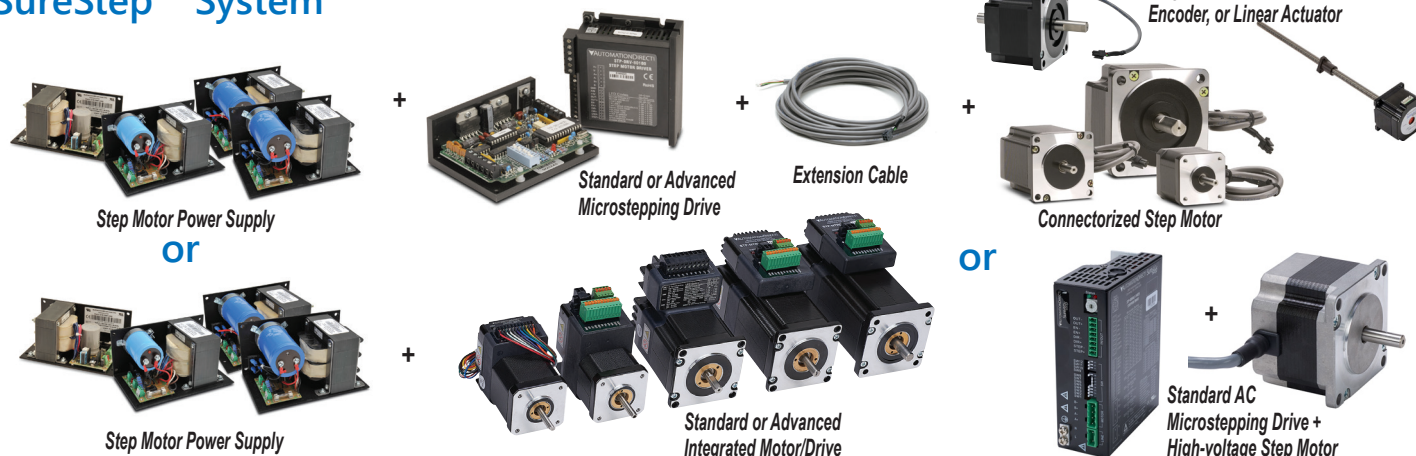

SureStep stepping family includes:

- Linear step motor power supplies
- DIP-switch configurable microstepping drives
- Software-configurable advanced microstepping drives
- Motor extension cables
- NEMA 14, 17, 23, 24, 34, and 42 frame size step motors in single shaft, dual-shaft, IP65, high bus voltage, or encoder mounted configurations
- NEMA 17, 23, and 24 frame size integrated motor/drives
- NEMA 17 and 23 linear actuators (6", 9", and 12" lengths)
- Variety of step motor accessories including encoders, control cables, and connector kits
- SureStep PC adapter, USB to RS-485
- SureMotion Pro software for advanced drive and integrated motor/drive systems

Motor features

- Low voltage, high torque, 2-phase, bipolar, 1.8° per step, 4-lead
- High voltage, high torque, 2-phase, bipolar, 1.8° per step, 8-lead
- Available in single-shaft and dual-shaft models
- Connectorized pigtails or integrated 10' cable (STP-MTRAC only)
- Optional encoder feedback (STP-MTR-xxxxE)
- IP65 versions available (STP-MTR-xxxxW)
- High bus voltage versions available (STP-MTRAC-xxxx)
- Linear actuators have lead screws for motor shafts (STP-LExx-xxxxxx)
- Linear actuators ADJ series available with encoder-ready rear shaft and machined journals on screw ends for easy bearing mounting
- Wide variety of NEMA 14, 17, 23, and 34 motors

Power supply features

- Linear, unregulated DC power supplies
- 120/240 VAC selectable input
- 32V, 48V, 70V DC output models available
- All linear models have additional 5VDC, 500mA regulated logic supply
- Fusing included for both incoming AC and outgoing DC
- 5V supply has electronic overload protection

NOTE: If a switching power supply is desired, we recommend the PSB12-xxxS, PSB24-xxxS, or PSB48-xxxS series.

Standard stepper drive features

(STP-DRV-4035, -4830, -4845, -6575, STP-MTRD-x, STP-DRVAC-24025)

- Low cost, digital step motor driver in compact package
- Operates from Step and Direction signals, or Step CW and Step CCW (jumper selectable).
- Fault output and Enable input
- Optically isolated I/O
- Digital filters prevent position error from electrical noise on command signals; jumper selectable: 150 kHz or 2MHz
- Rotary or DIP switch easily selects from many popular motors
- Electronic damping and anti-resonance
- Automatic idle current reduction to reduce heat when motor is not moving; switch selectable: 50% or 90% of running current
- Switch-selectable step resolution: 200–25,600 steps per revolution depending on drive
- Switch-selectable microstep emulation provides smoother, more reliable motion in full- and half-step modes
- Automatic self test (switch selectable)
- Optional external encoder feedback (integrated models)
- Operates from a 24–65 VDC or 12–40 VDC power supply, depending upon model. STP-DRVAC drive operates off AC voltage.
- Running current from 0.35–7.5A

Advanced stepper drive features

(STP-DRV-4850, STP-DRV-80100, STP-MTRD-xR, & STP-MTRD-xRE)

- Max 5A, 48V and max 10A, 80V models available
- Software configurable
- Programmable microsteps
- Internal indexer (via ASCII commands)
- Self test feature
- Idle current reduction
- Anti-resonance
- Torque ripple smoothing
- Step, analog, and serial communication inputs
- Serial communications allow point-to-point positioning
- AB quadrature/encoder following (integrated models)
- Optional internal encoder feedback (integrated models)
- RS-485 communications (integrated models)
- Four 5 to 24 volt digital "Variable I/O" points (NEMA 24 integrated models)
- Controllable via streaming SCL commands

Stepping System Components

SureStep Power Supply / DC Input Drive Compatibility

| Drive(1)(2) | Recommended Linear Power Supply(1)(2)(5) | | | |
|----------------|--|--------------|--------------|-----------------|
| | STP-PWR-3204 | STP-PWR-4805 | STP-PWR-4810 | STP-PWR-7005(3) |
| STP-DRV-4035 | ✓ | No | No | No |
| STP-DRV-4830 | ✓ | ✓ | ✓ | No |
| STP-DRV-4845 | ✓ | ✓ | ✓ | No |
| STP-DRV-4850 | ✓ | ✓ | ✓ | No |
| STP-DRV-6575 | ✓ | ✓ | ✓ | No |
| STP-DRV-80100 | ✓ | ✓ | ✓ | ✓ |
| STP-MTRD-17(4) | ✓ | ✓ | ✓ | No |
| STP-MTRD-23(4) | ✓ | ✓ | ✓ | ✓ |
| STP-MTRD-24(4) | ✓ | ✓ | ✓ | ✓ |

- 1) Do NOT use a power supply that exceeds the drive's input voltage range.
If using a linear power supply, ensure that the unloaded voltage does not float above the drive's maximum input range.
- 2) For best performance, use the lowest voltage power supply that supplies the required speed and torque.
- 3) An unloaded STP-PWR-7005 can float above the allowable input voltages of some drives if it is fed with a high AC input voltage (greater than 120VAC).
- 4) Integrated motor/drives are included here because they include a drive as well as a motor.
- 5) STP-DRVAC-x drives are AC powered and cannot be powered by DC power supplies.

SureStep Power Supply / DC Input Drive Compatibility

| Drive(1)(2) | Recommended Switching Power Supply(1)(2)(4) | | |
|----------------|---|------------|------------|
| | PSB12-xxxS | PSB24-xxxS | PSB48-xxxS |
| STP-DRV-4035 | ✓ | ✓ | No |
| STP-DRV-4830 | ✓ | ✓ | ✓ |
| STP-DRV-4845 | No | ✓ | ✓ |
| STP-DRV-4850 | No | ✓ | ✓ |
| STP-DRV-6575 | No | ✓ | ✓ |
| STP-DRV-80100 | No | ✓ | ✓ |
| STP-MTRD-17(3) | ✓ | ✓ | ✓ |
| STP-MTRD-23(3) | ✓ | ✓ | ✓ |
| STP-MTRD-24(3) | ✓ | ✓ | ✓ |

- 1) Do NOT use a power supply that exceeds the drive's input voltage range.
- 2) For best performance, use the lowest voltage power supply that supplies the required speed and torque.
- 3) Integrated motor/drives are included here because they include a drive as well as a motor.
- 4) STP-DRVAC-x drives are AC powered and cannot be powered by DC power supplies.

SureStep AC Motor/Drive Compatibility

| Model # | STP-DRVAC-24025 | |
|--------------------|--------------------|----------------------|
| | Series Wired Motor | Parallel Wired Motor |
| STP-MTRAC-23044(x) | ✓ | No |
| STP-MTRAC-23055(x) | ✓ | No |
| STP-MTRAC-23078(x) | ✓ | No |
| STP-MTRAC-34075(x) | ✓ | No |
| STP-MTRAC-34115(x) | ✓ | No |
| STP-MTRAC-34156(x) | ✓ | No |


NOTE: STP-MTRAC-34156(x) motors have a 5/8" front shaft.

SureStep DC Input Drive / Motor Compatibility⁽³⁾

| Motor ⁽¹⁾ | | | Recommended Drive ⁽¹⁾ | | | | | |
|----------------------|---------------------------|-----------------|----------------------------------|--------------|--------------|-----------------------------|-----------------------------|------------------------------|
| Model # (1) | Rated Amps ⁽²⁾ | Extension Cable | STP-DRV-4035 ⁽¹⁾ | STP-DRV-4830 | STP-DRV-4845 | STP-DRV-4850 ⁽¹⁾ | STP-DRV-6575 ⁽¹⁾ | STP-DRV-80100 ⁽¹⁾ |
| STP-MTRL-14026(x) | 0.35 | STP-EXTL-0xx | ✓ | ✓ | – | ✓ | – | – |
| STP-MTRL-14034(x) | 0.8 | | ✓ | ✓ | ✓ | ✓ | – | – |
| STP-MTR-17040(x) | 1.7 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| STP-MTR-17048(x) | 2.0 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| STP-MTR-17060(x) | 2.0 | STP-EXT-0xx | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| STP-MTR-23055(x) | 2.8 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| STP-MTR-23079(x) | 2.8 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| STP-MTR-34066(x) | 2.8 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| STP-MTRAC-42100(x) | 4.2 | STP-EXT42-0xx | – | – | ✓ | ✓ | ✓ | ✓ |
| STP-MTRAC-42151(x) | 6 | | | | | | ✓ | ✓ |
| STP-MTRAC-42202(x) | 6 | | | | | | ✓ | ✓ |
| STP-MTRH-23079(x) | 5.6 | | | | | | ✓ | ✓ |
| STP-MTRH-34066(x) | 6.3 | STP-EXTH-0xx | | | – | | ✓ | ✓ |
| STP-MTRH-34097(x) | 6.3 | | | | | | ✓ | ✓ |
| STP-MTRH-34127(x) | 6.3 | | | | | | ✓ | ✓ |
| STP-MTRACH-42100(x) | 6 | STP-EXTH42-0xx | | | | | ✓ | ✓ |
| STP-MTRACH-42151(x) | 8 | | | | | | – | ✓ |
| STP-MTRACH-42202(x) | 8 | | | | | | – | ✓ |

- 1) The combinations above will perform according to the published speed/torque curves. Using a motor with a current rating higher than the drive's output rating will proportionally limit the motor torque.
- 2) Listed NEMA42 motor amperages are for Bipolar Series wiring. See the NEMA42 motor specs for amperages with other wiring types.
- 3) Table not applicable to integrated motor/drives as drives and motors are already paired.

Typical Wiring Diagram

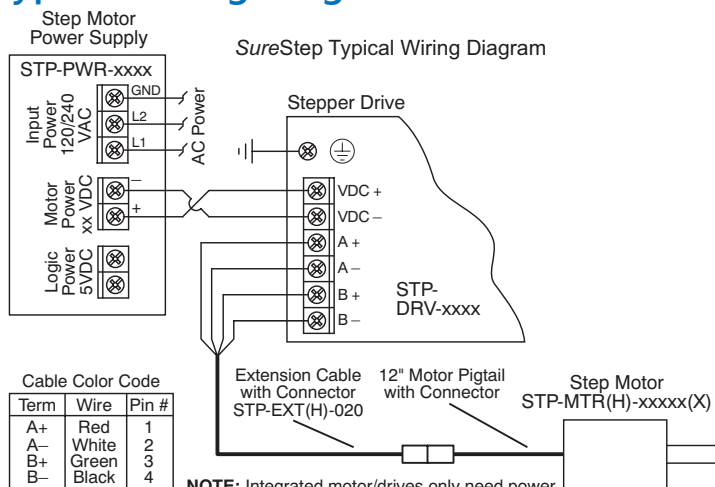

NOTE: Integrated motor/drives only need power since the drive and motor are one unit. MTRAC motors do not need an extension cable, they have 10' leads coming from the motor.

NOTE: STP-MTRAC-23xxx/34xxx motors and STP-DRVAC drives are designed to work with AC input power to the drive. They are not designed to work with DC input power.



Stepping System Drives

SureStep Series – Microstepping Drives Features Comparison

| Drive Model | | Standard Microstepping Drives | | | | | | Advanced Microstepping Drives | | |
|-----------------------------|-----------------|---|--|---|--|--|--|--|--|---|
| | | STP-DRVAC-24025 | STP-DRV-4830 | STP-DRV-4845 | STP-DRV-6575 | STP-MTRD-x | STP-DRV-4035 | STP-DRV-4850 | STP-DRV-80100 | STP-MTRD-xR |
| Price | | \$222.00 | \$77.00 | \$93.00 | \$107.00 | See Integrated Motor/Drives section | Retired | \$278.00 | \$332.00 | See Integrated Motor/Drives section |
| Drive Type | | Microstepping drive with pulse input | | | | Integrated stepper motor/drive | Micro-stepping drive with pulse input | Advanced microstepping drive with pulse or analog input, serial communication;includes programming/communication cable STP-232RJ11-CBL | | Advanced integrated stepper motor/drive with internal encoder |
| | | enclosed | | | | enclosed | open-frame | enclosed | | enclosed |
| Output Current | | 0.6–2.5 A/phase | 0.35–3.0 A/phase | 0.8–4.5 A/phase | 1.0–7.5 A/phase | – | 0.4–3.5 A/phase | 0.1–5 A/phase | 0.1–10 A/phase | – |
| Input Voltage | | nominal: 120/240 VAC range: 90–240 VAC | nominal: 12–48 VDC range: 10–53 VDC | nominal: 24–48 VDC range: 20–60 VDC | nominal: 24–75 VDC range: 20–85 VDC | nominal: 12-48 VDC (NEMA 17) 12-70 VDC (NEMA 23) range: 10-55 VDC (NEMA 17) 11-74 VDC (NEMA 23) | nominal: 12–32 VDC range: 12–42 VDC | nominal: 24–48 VDC range: 18– 53 VDC | nominal: 24–80 VDC range: 18–88 VDC | nominal: 12-48 VDC (NEMA 17) 12-70 VDC (NEMA 23, 24) range: 10-55 VDC (NEMA 17) 11-74 VDC (NEMA 23) 10-75 VDC (NEMA 24) |
| Configuration Method | | rotary dial, dip switches, jumpers | | | | dip switches | | SureMotion Pro software (SM-PRO : free download) | | |
| Amplifier Type | | MOSFET, dual H-bridge, 4-quadrant | | | | Dual H-bridge, 4 quadrant | MOSFET, dual H-bridge, bipolar chopper | MOSFET, dual H-bridge, 4-quadrant | | Dual H-bridge, 4 quadrant |
| Current Control | | 4-state PWM @ 20 kHz | 4-state PWM @ 16 kHz | 4-state PWM @ 20 kHz | | 4-state PWM @ 16 kHz | 4-state PWM @ 20 kHz | | | |
| Microstep Resolution | | dipswitch selectable | | | | | software selectable | | | |
| | | 200 to 25,600 steps/rev | | 200 to 20,000 steps/rev | | 200 to 25,600 steps/rev | 400 to 10,000 steps/rev | 200 to 51200 steps/rev | | |
| Modes of Operation | Step & Dir | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| | CW/CCW | YES | YES | YES | YES | YES | n/a | YES | YES | YES |
| | A/B Quad | n/a | n/a | n/a | n/a | n/a | n/a | YES | YES | YES |
| | Oscillator | n/a | n/a | n/a | n/a | n/a | n/a | YES | YES | YES |
| | Serial Indexing | n/a | n/a | n/a | n/a | n/a | n/a | YES | YES | YES |
| Digital Input Signals | Step/Pulse | step & direction, CW/CCW step | | | | step & direction, CW/CCW step | step & direction | step & direction, CW/CCW step, A/B quadrature, run/stop & direction, jog CW/CCW, CW/CCW limits | | |
| | Direction | | | | | | | | | |
| | Enable | motor disable | | | | motor enable | motor disable | motor enable, alarm reset, speed select (oscillator mode) | | |
| Analog Input | | n/a | n/a | n/a | n/a | n/a | n/a | speed control | | signal range, offset, dead band, and filtering |
| Output Signal | | fault | n/a | fault | fault | fault | n/a | fault, motion, tach | | brake, fault, motion, tach |
| Communication Interface | | n/a | n/a | n/a | n/a | n/a | n/a | YES (programming/communication cable included) | | |
| Non-volatile Memory Storage | | n/a | n/a | n/a | n/a | n/a | n/a | YES | | |
| Idle Current Reduction | | YES | | | | | | | | |
| Self Test | | YES | | | | | | | | |
| Additional Features | | Step pulse noise filter, accepts AC power input | Step pulse noise filter | Load inertia (anti-resonance & damping feature to improve motor performance) Step pulse noise filter | | | n/a | Anti-resonance (Electronic Damping) Auto setup Microstep emulation Torque ripple smoothing (allows for fine adjustment of phase in the range 0.25 to 1.5 rps) Waveform (command signal) smoothing | | |

Refer to Specifications Tables for detailed specifications.

Stepping System Motors

SureStep® Stepping Motors

| SureStep Series Part Numbers – Bipolar Stepping Motors* | | | | | |
|---|----------|------------|--------------|------------------|---------------------|
| Bipolar Stepping Motors | Price | Shaft Type | Torque Level | Encoder Mounting | Drawing |
| STP-MTRL-14026 | \$25.00 | single | low | not available | PDF |
| STP-MTRL-14026D | \$29.50 | dual | | optional | PDF |
| STP-MTRL-14026E** | \$107.00 | dual | | pre-installed | PDF |
| STP-MTRL-14034 | \$31.00 | single | | not available | PDF |
| STP-MTRL-14034D | \$36.50 | dual | | optional | PDF |
| STP-MTRL-14034E** | \$111.00 | dual | | pre-installed | PDF |
| STP-MTR-17040 | \$22.50 | single | high | not available | PDF |
| STP-MTR-17040D | \$26.50 | dual | | optional | PDF |
| STP-MTR-17040E** | \$103.00 | dual | | pre-installed | PDF |
| STP-MTR-17040W*** | \$146.00 | single | | not available | PDF |
| STP-MTR-17048 | \$26.50 | single | | not available | PDF |
| STP-MTR-17048D | \$31.00 | dual | | optional | PDF |
| STP-MTR-17048E** | \$108.00 | dual | | pre-installed | PDF |
| STP-MTR-17048W*** | \$150.00 | single | | not available | PDF |
| STP-MTR-17060 | \$43.00 | single | | not available | PDF |
| STP-MTR-17060D | \$48.50 | dual | | optional | PDF |
| STP-MTR-17060E** | \$125.00 | dual | | pre-installed | PDF |
| STP-MTR-17060W*** | \$193.00 | single | | not available | PDF |
| STP-MTR-23055 | \$42.50 | single | | not available | PDF |
| STP-MTR-23055D | \$48.50 | dual | | optional | PDF |
| STP-MTR-23055E** | \$126.00 | dual | | pre-installed | PDF |
| STP-MTR-23055W*** | \$181.00 | single | | not available | PDF |
| STP-MTR-23079 | \$55.00 | single | | not available | PDF |
| STP-MTR-23079D | \$60.00 | dual | | optional | PDF |
| STP-MTR-23079E** | \$137.00 | dual | | pre-installed | PDF |
| STP-MTR-23079W*** | \$196.00 | single | | not available | PDF |
| STP-MTR-34066 | \$129.00 | single | higher | not available | PDF |
| STP-MTR-34066D | \$146.00 | dual | | optional | PDF |
| STP-MTR-34066W*** | \$234.00 | single | | not available | PDF |
| STP-MTRH-23079 | \$61.00 | single | | not available | PDF |
| STP-MTRH-23079D | \$66.00 | dual | | optional | PDF |
| STP-MTRH-23079E** | \$144.00 | dual | | pre-installed | PDF |
| STP-MTRH-23079W*** | \$291.00 | single | | not available | PDF |
| STP-MTRH-34066 | \$144.00 | single | | not available | PDF |
| STP-MTRH-34066D | \$160.00 | dual | | optional | PDF |
| STP-MTRH-34066W*** | \$331.00 | single | | not available | PDF |
| STP-MTRH-34097 | \$163.00 | single | | not available | PDF |
| STP-MTRH-34097D | \$180.00 | dual | | optional | PDF |
| STP-MTRH-34097W*** | \$371.00 | single | | not available | PDF |
| STP-MTRH-34127 | \$192.00 | single | | not available | PDF |
| STP-MTRH-34127D | \$212.00 | dual | | optional | PDF |
| STP-MTRH-34127W*** | \$406.00 | single | | not available | PDF |

* For integrated motor/drives part numbers and pricing, see the integrated motor/drives section.


** E model motors come with an AMT112Q-V encoder pre-installed. Requires STP-CBL-EBxx for encoder wiring. To change from the default 400ppr, use AMT-PGRM-17C. See the SureStep Stepping System Encoders section for more details.

*** W models are IP65 washdown rated. All others are IP40.


STP-MTR-xxxxx
(single-shaft)




STP-MTR-xxxxxE
(encoder mount)

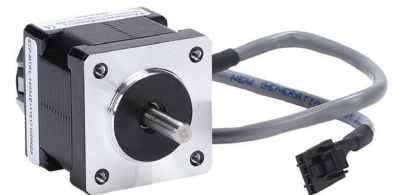

STP-MTR-xxxxxD
(dual-shaft)

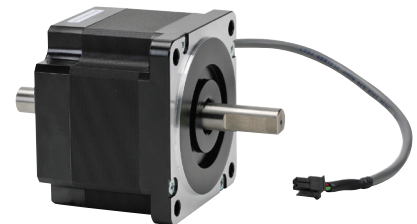

STP-MTR-xxxxxW
(IP65)

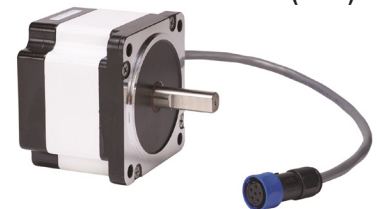



Stepping System Motors

SureStep® Stepping Motors

| SureStep Series Part Numbers – Bipolar Stepping Motors, continued | | | | | |
|---|----------|------------|-------------------------------|------------------|---------------------|
| Bipolar Stepping Motors | Price | Shaft Type | Torque Level | Encoder Mounting | Drawing |
| Motors listing continued from previous page | | | | | |
| STP-MTRAC-23044 | \$63.00 | single | High voltage High torque | not available | PDF |
| STP-MTRAC-23044D | \$64.00 | dual | | optional | PDF |
| STP-MTRAC-23055 | \$71.00 | single | | not available | PDF |
| STP-MTRAC-23055D | \$72.00 | dual | | optional | PDF |
| STP-MTRAC-23078 | \$99.00 | single | | not available | PDF |
| STP-MTRAC-23078D | \$100.00 | dual | | optional | PDF |
| STP-MTRAC-34075 | \$265.00 | single | | not available | PDF |
| STP-MTRAC-34075D | \$265.00 | dual | | optional | PDF |
| STP-MTRAC-34115 | \$274.00 | single | | not available | PDF |
| STP-MTRAC-34115D | \$275.00 | dual | | optional | PDF |
| STP-MTRAC-34156 | \$295.00 | single* | High voltage Higher torque | not available | PDF |
| STP-MTRAC-34156D | \$295.00 | dual* | | optional | PDF |
| STP-MTRAC-42100 | \$244.00 | single | | not available | PDF |
| STP-MTRAC-42100D | \$265.00 | dual | | optional** | PDF |
| STP-MTRAC-42151 | \$409.00 | single | | not available | PDF |
| STP-MTRAC-42151D | \$430.00 | dual | | optional** | PDF |
| STP-MTRAC-42202 | \$501.00 | single | | not available | PDF |
| STP-MTRAC-42202D | \$519.00 | dual | | optional** | PDF |
| STP-MTRACH-42100 | \$244.00 | single | | not available | PDF |
| STP-MTRACH-42100D | \$265.00 | dual | | optional** | PDF |
| STP-MTRACH-42151 | \$409.00 | single | | not available | PDF |
| STP-MTRACH-42151D | \$430.00 | dual | | optional** | PDF |
| STP-MTRACH-42202 | \$501.00 | single | | not available | PDF |
| STP-MTRACH-42202D | \$519.00 | dual | | optional** | PDF |


* NOTE: STP-MTRAC-34156(x) motors have a 5/8" front shaft.

** NOTE: NEMA 42 "D" motors require an [STP-MTRA-42ENC](#) adapter plate for AMT13/AMT33 encoder mounting.

STP-MTRAC-xxxxx
(single-shaft)



STP-MTRAC-xxxxxD
(dual-shaft)

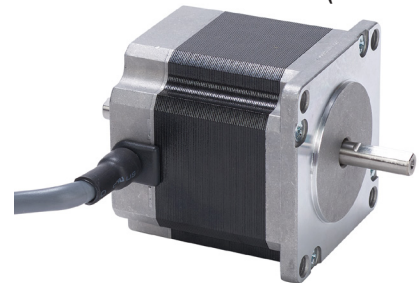

STP-MTRACH-42xxxD
(dual-shaft)



SureStep® Stepping Motors Mounting Accessories

| Mounting Accessories – for NEMA 17 and NEMA 42 SureStep Stepping Motors | | | | |
|---|--------|---|---------------------|-------------------------|
| Part Number | Price | Description | Drawing Links | Use With |
| STP-MTRA-RB-85 | \$9.25 | Reducer bushing, 8mm OD to 5mm ID, 16mm length, aluminum alloy. Connects NEMA size 17 stepper motors to Koyo TRD-NH and TRD-SH hollow shaft encoders. | n/a | SureStep NEMA 17 motors |
| STP-MTRA-42ENC | \$9.25 | SureStep encoder mounting plate, metal body. For use with SureStep NEMA 42 stepper motors with dual shafts. Encoder mounting screws and mounting plate screws included. Mounting holes for CUI Devices AMT132/AMT332 encoders and US Digital E6 encoders. | PDF | SureStep NEMA 42 motors |

STP-MTRA-42ENC





Stepping System Motors

SureStep® Stepping Motors

| SureStep Series Specifications – Connectorized Bipolar Stepping Motors | | | | | | | | | | | | | |
|--|----------|--|----------------------------|---|--------------------------|--------------------------|--------------------------|--------------------------|------------------|--|-------------------|-------------------|-------------------|
| Bipolar Stepping Motors | | Low Voltage Low Torque | | Low Voltage High Torque | | | | | | Low Voltage Higher Torque | | | |
| | | STP-MTRL-14026(x) | STP-MTRL-14034(x) | STP-MTR-17040(x) | STP-MTR-17048(x) | STP-MTR-17060(x) | STP-MTR-23055(x) | STP-MTR-23079(x) | STP-MTR-34066(x) | STP-MTRH-23079(x) | STP-MTRH-34066(x) | STP-MTRH-34097(x) | STP-MTRH-34127(x) |
| NEMA Frame Size | | 14 | 14 | 17 | 17 | 17 | 23 | 23 | 34 | 23 | 34 | 34 | 34 |
| Maximum Holding Torque* | (lb·in) | 0.5 | 1.25 | 3.81 | 5.19 | 7.19 | 10.37 | 17.25 | 27.12 | 17.87 | 27.12 | 50.00 | 80.50 |
| | (oz·in) | 8 | 20 | 61 | 83 | 115 | 166 | 276 | 434 | 286 | 434 | 800 | 1288 |
| | (N·m) | 0.06 | 0.14 | 0.43 | 0.59 | 0.81 | 1.17 | 1.95 | 3.06 | 2.02 | 3.06 | 5.65 | 9.10 |
| Rotor Inertia | (oz·in2) | 0.06 | 0.08 | 0.28 | 0.37 | 0.56 | 1.46 | 2.60 | 7.66 | 2.60 | 7.66 | 14.80 | 21.90 |
| | (kg·cm2) | 0.0003 | 0.00035 | 0.05 | 0.07 | 0.10 | 0.27 | 0.48 | 1.40 | 0.48 | 1.40 | 2.71 | 4.01 |
| Rated Current (A/phase) | | 0.35 | 0.8 | 1.7 | 2.0 | 2.0 | 2.8 | 2.8 | 2.8 | 5.6 | 6.3 | 6.3 | 6.3 |
| Resistance (Ω/phase) | | 8.5 | 7.66 | 1.6 | 1.4 | 2.0 | 0.75 | 1.1 | 1.11 | 0.4 | 0.25 | 0.3 | 0.49 |
| Inductance (mH/phase) | | 5.77 | 6.92 | 3.0 | 2.7 | 3.3 | 2.4 | 3.8 | 6.6 | 1.2 | 1.5 | 2.1 | 4.1 |
| Insulation Class | | 130°C [266°F] Class B; 300V rms | | | | | | | | | | | |
| Basic Step Angle | | 1.8° | | | | | | | | | | | |
| Shaft Runout (in) | | 0.002 in [0.051 mm] | | | | | | | | | | | |
| Max Shaft Radial Play @ 1lb load | | 0.001 in [0.025 mm] | | | | | | | | | | | |
| Perpendicularity | | 0.003 in [0.076 mm] | | | | | | | | | | | |
| Concentricity | | 0.003 in [0.076 mm] | | | | | | | | | | | |
| Maximum Radial Load (lb [kg])* | | 6.0 [2.7] | | | | | 15.0 [6.8] | | 39.0 [17.7] | 15.0 [6.8] | 39.0 [17.7] | | |
| Maximum Thrust Load (lb [kg])* | | 6.0 [2.7] | | | | | 13.0 [5.9] | | 25.0 [11.3] | 13.0 [5.9] | 25.0 [11.3] | | |
| Storage Temperature Range | | -20°C to 100°C [-4°F to 212°F] | | | | | | | | | | | |
| Operating Temperature Range | | -20°C to 50°C [-4°F to 122°F] (motor case temperature should be kept below 80°C [176°F]) | | | | | | | | | | | |
| Operating Humidity Range | | 55% to 85% non-condensing | | | | | | | | | | | |
| Product Material | | steel motor case; stainless steel shaft(s) | | | | | | | | | | | |
| Environmental Rating | | IP40 (IP65 for “W” motors) | | | | | | | | | | | |
| Weight (lb [kg]) (E models) | | 0.25 [0.11] (0.3 [0.1]) | 0.35 [0.15] (0.4 [0.2]) | 0.6 [0.3] (0.7 [0.3]) | 0.7 [0.3] (0.8 [0.4]) | 0.9 [0.4] (0.9 [0.4]) | 1.5 [0.7] (1.5 [0.7]) | 2.2 [1.0] (2.4 [1.1]) | 3.9 [1.7] | 2.4 [1.1] (2.4 [1.1]) | 3.9 [1.7] | 5.9 [2.7] | 8.4 [3.8] |
| Agency Approvals | | CE | | | | | | | | | | | |
| Design Tips | | Allow sufficient time to accelerate the load and size the step motor with a 100% torque safety factor. DO NOT disassemble step motors because motor performance will be reduced and the warranty will be voided. DO NOT connect or disconnect the step motor during operation. Mount the motor to a surface with good thermal conductivity, such as steel or aluminum, to allow heat dissipation. Use a flexible coupling with “clamp-on” connections to both the motor shaft and the load shaft to prevent radial and thrust loading on bearings from minor misalignment. | | | | | | | | | | | |
| Accessory Extension Cable | | STP-EXTL-0xx | | STP-EXT-0xx STP-EXTW-0xx (for “W” motors) | | | | | | STP-EXTH-0xx STP-EXTHW-0xx (for “W” motors) | | | |

* For dual-shaft motors (STP-MTR-xxxxxD):

The sum of the front and rear Torque Loads, Radial Loads, and Thrust Loads must not exceed the applicable Torque, Radial, and Thrust load ratings of the motor.



Stepping System Power Supplies


SureStep® Power Supplies

| SureStep Series Specifications – Stepping System Power Supplies | | | | |
|---|---|---|---|---|
| Power Supply | <u>STP-PWR-3204</u> | <u>STP-PWR-4805</u> | <u>STP-PWR-4810</u> | <u>STP-PWR-7005</u> |
| Drawing | PDF | PDF | PDF | PDF |
| Price | \$150.00 | \$183.00 | \$237.00 | \$233.00 |
| Input Power (fuse protected *) | 1-phase, 120/240 VAC, 50/60 Hz, 150 VA Fuse*: 3A | 1-phase, 120/240 VAC, 50/60 Hz, 350 VA Fuse*: 5A | 1-phase, 120/240 VAC, 50/60 Hz, 650 VA Fuse*: 8A | 1-phase, 120/240 VAC, 50/60 Hz, 500 VA Fuse*: 7A |
| Input Voltage Range (switch selectable) | 120/240 VAC $\pm 10\%$ (Voltage range switch is set to 240 VAC from factory) | | | |
| Inrush Current | 120 VAC < 12 A / 240 VAC < 14 A | 120 VAC < 20A / 240 VAC < 24A | 120 VAC < 40A / 240 VAC < 50A | |
| Motor Supply Output (linear unregulated, fuse protected *, and power on LED indicator) | 32 VDC @ 4A (fully loaded) 35 VDC @ 1A load 41 VDC @ no load Fuse*: 6A (Electrically isolated from Logic Supply Output) | 46.5 VDC @ 5A (fully loaded) 52 VDC @ 1A load 57.5 VDC @ no load Fuse*: 8A | 46.5 VDC @ 10A (fully loaded) 50 VDC @ 1A load 57.5 VDC @ no load Fuse*: 15A | 70 VDC @ 5A (fully loaded) 79 VDC @ 1A load 86.5 VDC @ no load Fuse*: 8A |
| Logic Supply Output (regulated and power on LED indicator) | 5 VDC $\pm 5\%$ @ 500 mA (Electronically Overload Protected) (Electrically isolated from Motor Supply Output) | | | |
| Watt Loss | 13W | 25W | 51W | 42W |
| Storage Temperature Range | -55 to 85 °C [-67 to 185 °F] | | | |
| Operating Temperature Range | 0 to 50 °C [32 to 122 °F] full rated; derate current 1.1% per degree above 50°C; 70 °C [158 °F] maximum | | | |
| Humidity | 95% (non-condensing) relative humidity maximum | | | |
| Cooling Method | Natural convection (mount power supply to metal surface if possible) | | | |
| Mounting | Mount on either wide or narrow side with machine screws per dimension diagrams | | | |
| Weight (lb [kg]) | 6.5 [2.9] | 11 [4.9] | 18 [8.3] | 16 [7.2] |
| Connections | Screw Terminals | | | |
| Agency Approvals | UL (file # E181899), CSA, CE | | | |

* Fuses to be replaced by qualified service personnel only. Use (1-1/4 x 1/4 in) ceramic fast-acting fuses (Edison type ABC from AutomationDirect, or equivalent).

Power Supply Dimensions

STP-PWR-3204 Power Supply

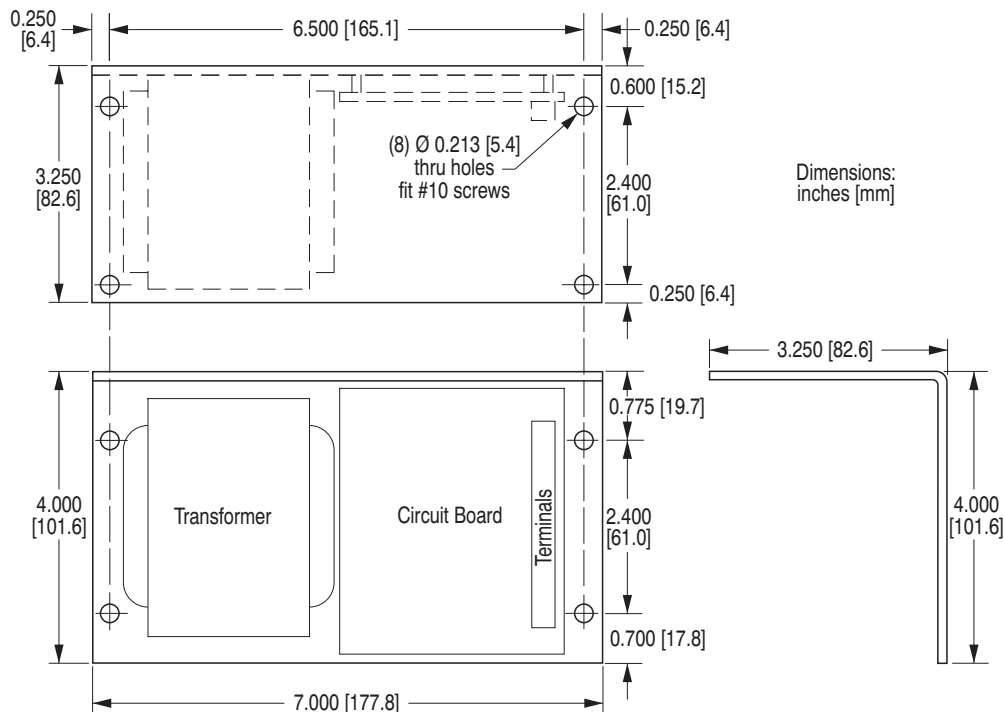




Integrated Microstepping Motors and Drives

SureStep® Integrated Motors System

General integrated motor/drive features

- DC power supply required (12-48 VDC or 12-70 VDC)
- Pulse/Direction or CW Pulse/CCW Pulse
- Digital input filtering
- "E" models include an encoder
- Three optically isolated digital inputs, 5 to 24 volts
- Step input signal smoothing (microstep emulation), performs high resolution stepping by synthesizing coarse steps into fine microsteps
- Dynamic smoothing, software-configurable filtering for use in removing spectral components from command sequence, reduces jerk, limiting excitation of system resonance
- Anti-resonance (electronic damping): raises the system-damping ratio to eliminate midrange instability and allow stable operation throughout the speed range of the motor
- Idle current reduction range of 0-90% of running current after a delay selectable in milliseconds (Standard models = 50/90%, DIP switch selectable)
- Configurable hardware digital noise filter, software noise filter
- Non-volatile storage, configurations are saved in FLASH memory on-board the DSP
- Dynamic current control, software configurable for running current, accel current, idle current, to make motion smoother and the motor run cooler

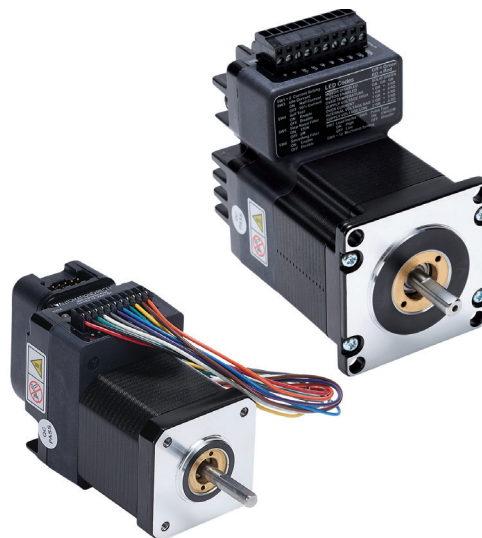

Standard NEMA 17 and 23 motor/drives

Standard integrated motor/drive features


(STP-MTRD-x)

- "E" models have an externally wireable encoder which can provide feedback to an external controller
- Configurable via DIP switches
- Available torque from 68 to 210 oz-in

Advanced integrated motor/drive features

(STP-MTRD-xR)

- Step and Direction, CW/CCW, and AB Quadrature/Encoder following
- Velocity (Oscillator) and position mode
- Control via streaming SCL commands
- RS-485 ASCII (2- or 4-wire) communications
- On "E" models, the internal encoder provides improved position and speed control
- Four "Variable I/O" points, 5 to 24 volts (NEMA 24 models)
- Analog input for speed and position, 0 to 5 VDC
- Configurable via SureMotion Pro software
- Available torque from 54 to 340 oz-in

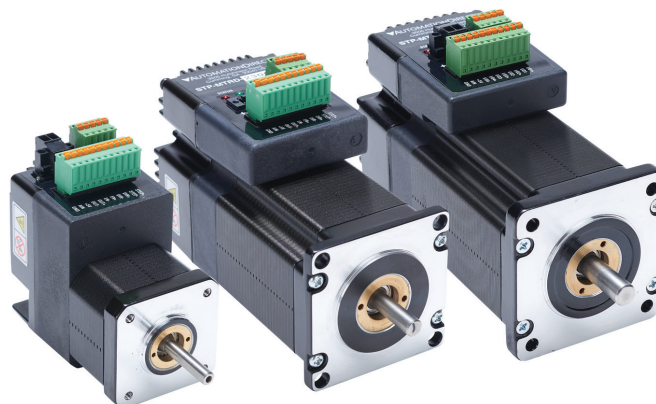

Advanced NEMA 17, 23, and 24 motor/drives

| SureStep Series Part Numbers Standard Integrated Motor/Drives | | | |
|--|-----------|----------|---------------------|
| Integrated Motor/Drive | NEMA Size | Price | Drawing |
| STP-MTRD-17038 | 17 | \$115.00 | PDF |
| STP-MTRD-17038E | 17 | \$202.00 | PDF |
| STP-MTRD-23042 | 23 | \$178.00 | PDF |
| STP-MTRD-23042E | 23 | \$265.00 | PDF |
| STP-MTRD-23065 | 23 | \$187.00 | PDF |
| STP-MTRD-23065E | 23 | \$272.00 | PDF |

Note: Standard integrated motor/drives with an "E" have an external encoder that can be wired to an external controller.

| SureStep Series Part Numbers Advanced Integrated Motor/Drives | | | |
|--|-----------|----------|---------------------|
| Integrated Motor/Drive | NEMA Size | Price | Drawing |
| STP-MTRD-17030R | 17 | \$274.00 | PDF |
| STP-MTRD-17030RE | 17 | \$352.00 | PDF |
| STP-MTRD-17038R | 17 | \$287.00 | PDF |
| STP-MTRD-17038RE | 17 | \$384.00 | PDF |
| STP-MTRD-23042R | 23 | \$295.00 | PDF |
| STP-MTRD-23042RE | 23 | \$409.00 | PDF |
| STP-MTRD-23065R | 23 | \$307.00 | PDF |
| STP-MTRD-23065RE | 23 | \$415.00 | PDF |
| STP-MTRD-24075RV | 24 | \$415.00 | PDF |
| STP-MTRD-24075RVE | 24 | \$493.00 | PDF |

Note: Advanced integrated motor/drives with an "E" have an internal encoder used for stall prevention (cannot be wired to an external PLC or controller).



Stepping System Accessories

SureStep® Microstepping Drives Accessories

Braking Accessories

As a load rapidly decelerates from a high speed, much of the kinetic energy of that load is transferred back to the motor. This energy is then pushed back to the drive and power supply, resulting in increased system voltage. If there is enough overhauling load on the motor, the DC voltage will go above the drive and/or power supply limits. In general, the more torque the motor is capable of producing then the more energy it can push back into the drive.

When using a regulated/switching power supply, this can trip the overvoltage protection of the power supply or drive, and cause it to shut down.

To solve this problem, AutomationDirect offers a regeneration clamp as an optional accessory. The regen clamp has a built-in 50W braking resistor. The STP-DRVA-RC-050A does not have the ability to use an external resistor.



Regeneration Clamp [STP-DRVA-RC-050A](#)

Regeneration Clamp Features

[STP-DRVA-RC-050A](#)

- Built-in 50W power resistor for more continuous current handling
- Mounted on a heat sink
- Voltage range: 24–80 VDC; no user adjustments required
- Power: 50W continuous; 800W peak
- Indicators (LED):
Green = power supply voltage is present
Red = clamp is operating (usually when stepper is decelerating)
- Protection: The external power supply is internally connected to an "Input Diode" in the regen clamp that protects the power supply from high regeneration voltages. This diode protects the system from connecting the power supply in reverse. If the clamp circuit fails, the diode will continue to protect the power supply from over-voltage.
- Three drive connections, 7A max per channel, 15A total output current
- Removable terminal blocks (replacement kit STP-CON-4)
- Uses 18-20 AWG wire for connections

SureStep Damper

A step motor inertia damper can smooth out steps in a typical step motor resulting in a quieter and smoother motion when rotating between steps. Reducing the resonance and possible micro oscillations when moving from step to step is the main purpose of a "hockey puck" style damper, but it can also be used as a hand wheel to directly rotate the position of the rotor when power is removed from the motor. The damper is a properly sized machined piece of aluminum encased in plastic. It is sized and weighted for general damping of the respective frame size motor.



Damper

| Sure Step Series Specifications – Microstepping Drives Optional Accessories | | | |
|---|---------|---|---------------------|
| Part Number | Price | Description | Drawing |
| STP-DRVA-RC-050A* | \$61.00 | Regen Clamp: 50W, for DC input stepper and servo drives, enclosed | PDF |
| STP-MTRA-17DMP | \$15.00 | SureStep damper, metal body. For use with NEMA 17 stepper motors with 5mm shafts. Mounting set screw included. | PDF |
| STP-MTRA-23DMP | \$34.50 | SureStep damper, metal body. For use with NEMA 23 stepper motors with 1/4 inch shafts. Mounting set screw included. | PDF |

* Do not use the regeneration clamp in an atmosphere containing corrosive gases.



Stepping System Accessories

SureStep® Microstepping Drives Accessories

USB to RS-485 Adapter

The STP-USB485-4W is a USB to RS-232/RS-485 converter that can be used in 2-wire or 4-wire serial networks. Serial communication can be wired up via the 9-pin D-sub connector or through the 6-screw terminals.

The STP-USB485-4W can be set for several different configurations. These modes are set up by the 4 DIP switches on the outside of the case (RS-232/RS-485, full/half duplex) and by the 7 jumpers located inside the case (termination/bias resistors).

SureStep Advanced Drives communicate via RS-232 (for control and for configuration via SureMotion Pro).


The Advanced Integrated motor/drives use RS-485. While the Advanced Integrated motor/drives can be wired for either 2- or 4-wire networks, 4-wire is require for use with SureMotion Pro due to the Firmware Download utility and the Status Monitor Screen.

Depending on the host controller's RS-485 implementation, either 2- or 4-wire RS-485 can be used for control. All RS-485 PLCs that have 2-wire capability (Productivity, BRX, Click, DirectLogic, etc.) can control the Advanced Integrated steppers.



| SureStep PC Adapter - STP-USB485-4W | |
|-------------------------------------|--|
| Price | \$130.00 |
| Drawing | PDF |
| Communications | 2-wire RS-232 2- or 4-wire RS-485 |
| Configure With | Internal jumpers and external DIP switches |
| Compatible Cables | STP-232RJ11-CBL STP-485DB9-CBL-2 USB |

Dimensions = in [mm]

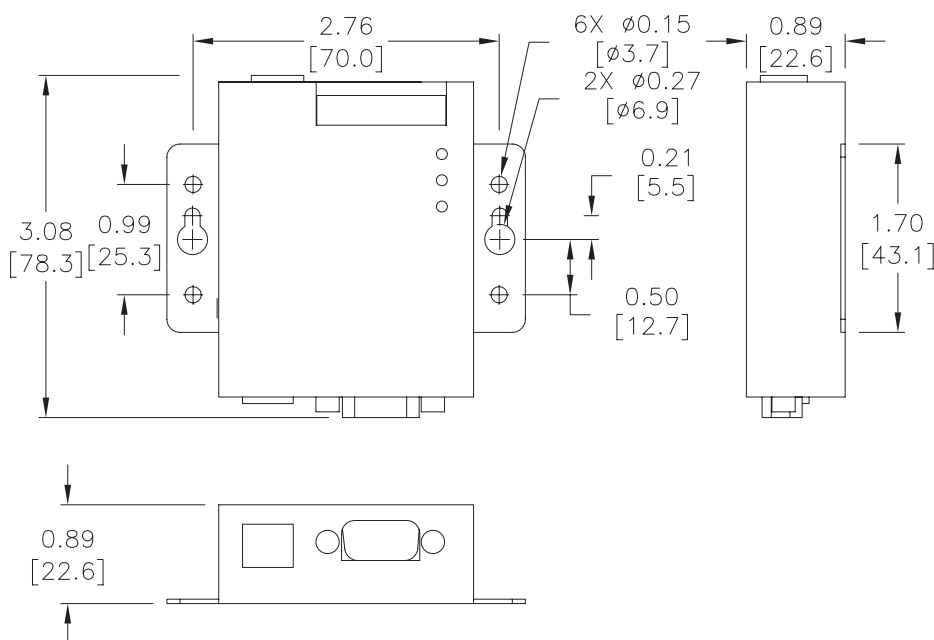



Stepping System Accessories

SureStep® Stepping System Encoders

Replacement Encoders

The [STP-MTRA-ENC1](#) is a replacement for the encoder that comes standard with the STP-MTRD-17038E, STP-MTRD-23042E, and STP-MTRD-23065E integrated motor/drives. Note that the encoder included with (E) model advanced integrated motor/drives is internal and cannot be replaced.

The [AMT112Q-V](#) is a replacement for the encoder that comes standard with the STP-MTR(x)-xxxxE stand alone step motors.

Installation tool and mounting hardware is included with all replacement encoders. For more information and details on how to wire the replacement encoders, please see the SureStep User Manual.

Optional Encoders

Optional encoders can be purchased separately for standard integrated motor/drives and standalone dual-shaft motors in all NEMA 14, 17, and 23 sizes, and also for STP-MTRAC-34xxxD motors (currently not available for STP-MTRx-34xxxD motors). All (D) model (dual-shaft) step motors come with pre-drilled holes in the rear end cap for easy encoder mounting. Pre-installed encoders on standalone dual-shaft motors and standard integrated motor/drives can be retrofitted with an appropriate optional encoder if desired. Please see the chart on the following page for encoder compatibility.

Features:

- Fixed resolutions include 400ppr or 1000ppr
- Configurable models have up to 4096ppr (default = 400ppr)
- Choose line driver or push-pull (totem) output signals



STP-MTRA-ENC2



AMT112Q-V



STP-MTRA-ENC11

| Sure Step Series Specifications – Encoders | | | |
|--|---------|---|---------------------|
| Part Number | Price | Description | Drawing |
| STP-MTRA-ENC1 | \$91.00 | SureStep incremental (quadrature) modular encoder, 5VDC, line driver (differential) output, 1000 ppr. For use with SureStep stepper motors with 5mm rear shaft. Installation tool and mounting hardware included. | PDF |
| STP-MTRA-ENC2 | \$79.00 | SureStep incremental (quadrature) modular encoder, 5VDC, Push-pull (totem) output, 1000 ppr. For use with SureStep stepper motors with 5mm rear shaft. Installation tool and mounting hardware included. | PDF |
| STP-MTRA-ENC3 | \$89.00 | SureStep incremental (quadrature) modular encoder, 5VDC, line driver (differential) output, 400 ppr. For use with SureStep stepper motors with 5mm rear shaft. Installation tool and mounting hardware included. | PDF |
| STP-MTRA-ENC4 | \$76.00 | SureStep incremental (quadrature) modular encoder, 5VDC, Push-pull (totem) output, 400 ppr. For use with SureStep stepper motors with 5mm rear shaft. Installation tool and mounting hardware included. | PDF |
| STP-MTRA-ENC5 | \$91.00 | SureStep incremental (quadrature) modular encoder, 5VDC, line driver (differential) output, 1000 ppr. For use with SureStep stepper motors with 1/4 inch rear shaft. Installation tool and mounting hardware included. | PDF |
| STP-MTRA-ENC6 | \$79.00 | SureStep incremental (quadrature) modular encoder, 5VDC, Push-pull (totem) output, 1000 ppr. For use with SureStep stepper motors with 1/4 inch rear shaft. Installation tool and mounting hardware included. | PDF |
| STP-MTRA-ENC7 | \$89.00 | SureStep incremental (quadrature) modular encoder, 5VDC, line driver (differential) output, 400 ppr. For use with SureStep stepper motors with 1/4 inch rear shaft. Installation tool and mounting hardware included. | PDF |
| STP-MTRA-ENC8 | \$76.00 | SureStep incremental (quadrature) modular encoder, 5VDC, Push-pull (totem) output, 400 ppr. For use with SureStep stepper motors with 1/4 inch rear shaft. Installation tool and mounting hardware included. | PDF |
| STP-MTRA-ENC11 | \$72.00 | SureStep incremental (quadrature) modular encoder, 5 VDC, line driver (differential) output, 1000 ppr. For use with SureStep stepper motors with 3/8in rear shaft. Installation hardware included. Requires STP-CBL-EAxx cable. | PDF |
| STP-MTRA-ENC12 | \$60.00 | SureStep incremental (quadrature) modular encoder, 5 VDC, push-pull (totem) output, 1000 ppr. For use with SureStep stepper motors with 3/8in rear shaft. Installation hardware included. Requires STP-CBL-EDxx cable. | PDF |
| STP-MTRA-ENC13 | \$61.00 | SureStep incremental (quadrature) modular encoder, 5 VDC, line driver (differential) output, 400 ppr. For use with SureStep stepper motors with 3/8in rear shaft. Installation hardware included. Requires STP-CBL-EAxx cable. | PDF |
| STP-MTRA-ENC14 | \$52.00 | SureStep incremental (quadrature) modular encoder, 5 VDC, push-pull (totem) output, 400 ppr. For use with SureStep stepper motors with 3/8in rear shaft. Installation hardware included. Requires STP-CBL-EDxx cable. | PDF |



Stepping System Accessories

SureStep® Stepping System Encoders

| Sure Step Series Encoder Compatibility | | | | | | |
|--|------|---------------|-------------------|---------------|---|--|
| Part Number | PPR | Bore Diameter | Output Type | Encoder Cable | PLC Compatibility | Motor Compatibility |
| <u>STP-MTRA-ENC1</u> | 1000 | 5mm | Line Driver | STP-CBL-EAxx | P2-HSI, P3-HSI, BRX*, CLICK C0-1xDxE-D* | STP-MTRx-14xxxD STP-MTRx-14xxxE STP-MTRx-17xxxD STP-MTRx-17xxxE Standard STP-MTRD-xxxxxE |
| <u>STP-MTRA-ENC2</u> | | | Push-pull (totem) | STP-CBL-EDxx | BRX*, CLICK C0-1xDxE-D* | |
| <u>STP-MTRA-ENC3</u> | 400 | | Line Driver | STP-CBL-EAxx | P2-HSI, P3-HSI, BRX*, CLICK C0-1xDxE-D* | |
| <u>STP-MTRA-ENC4</u> | | | Push-pull (totem) | STP-CBL-EDxx | BRX*, CLICK C0-1xDxE-D* | |
| <u>STP-MTRA-ENC5</u> | 1000 | 0.25 inch | Line Driver | STP-CBL-EAxx | P2-HSI, P3-HSI, BRX*, CLICK C0-1xDxE-D* | STP-MTRx-23xxxD STP-MTRx-23xxxE STP-MTRAC-23xxxD |
| <u>STP-MTRA-ENC6</u> | | | Push-pull (totem) | STP-CBL-EDxx | BRX*, CLICK C0-1xDxE-D* | |
| <u>STP-MTRA-ENC7</u> | 400 | | Line Driver | STP-CBL-EAxx | P2-HSI, P3-HSI, BRX*, CLICK C0-1xDxE-D* | |
| <u>STP-MTRA-ENC8</u> | | | Push-pull (totem) | STP-CBL-EDxx | BRX*, CLICK C0-1xDxE-D* | |
| <u>STP-MTRA-ENC11</u> | 1000 | 0.375 inch | Line Driver | STP-CBL-EAxx | P2-HSI, P3-HSI, BRX*, CLICK C0-1xDxE-D* | STP-MTRAC-34xxxD |
| <u>STP-MTRA-ENC12</u> | | | Push-pull (totem) | STP-CBL-EDxx | BRX*, CLICK C0-1xDxE-D* | |
| <u>STP-MTRA-ENC13</u> | 400 | | Line Driver | STP-CBL-EAxx | P2-HSI, P3-HSI, BRX*, CLICK C0-1xDxE-D* | |
| <u>STP-MTRA-ENC14</u> | | | Push-pull (totem) | STP-CBL-EDxx | BRX*, CLICK C0-1xDxE-D* | |

* Requires [FC-ISO-C](#)



Stepping System Accessories

SureStep® Microstepping Drives Accessories

SureMotion Pro Drive Configuration Software - for Advanced Stepper Drives and Advanced Integrated Motor/Drives

Free Download

SureMotion Pro configuration software is available as a free download from our website for SureStep advanced components (STP-DRV-4850, -80100, & STP-MTRD-xxxxxR).

- Completely replaces SureStep Pro. Required for integrated motor/drives.
- Used for easy configuration and setup of the drive, including drive, motion control mode, I/O, motor.
- Open, Save, Upload, Download configuration files to Advanced Drives and Drive/Motors.
- Status Monitor screen aids in troubleshooting alarms and faults.
- Self Test Mode verifies motor wiring and functionality.
- SCL Terminal window allows testing/verification of SCL (serial ASCII) commands before PLC programming begins.
- Help files include technical data, application information, advanced setup, serial command instructions.
- Runs on 32-bit/64-bit Windows operating systems.



SureStep Drive Configuration Software - for Advanced Stepper Drives

| Part Number | Price | Description |
|---------------|---------|--|
| SM-PRO | \$10.50 | SureMotion Pro Windows configuration software, USB drive or free download. For use with SureStep stepper drives with serial port. Requires PC serial port, USB-RS232-1 or STP-USB485-4W serial adapters. |

* Available for purchase on USB or can be [downloaded for free](#) from the AutomationDirect Web site (www.AutomationDirect.com).



Stepping System Cables

SureStep® Cables

| SureStep Series – Stepping System Cables | | | | | | | |
|--|----------|-------------------------------|--------------------------|---|--|---------------------|---------------------|
| Cable | Price | Purpose | Length | Use With | Cable End Connectors | Drawing | |
| STP-EXT-006 | \$13.00 | motor to drive extension | 6 ft | STP-MTR-xxxxx(x) | pigtail / Molex 43020-0401 connector | PDF | |
| STP-EXT-010 | \$14.50 | | 10 ft | | | PDF | |
| STP-EXT-020 | \$18.50 | | 20 ft | | | PDF | |
| STP-EXTH-006 | \$26.50 | | 6 ft | STP-MTRH-xxxxx(x) | pigtail / Molex 39-01-2041 connector | PDF | |
| STP-EXTH-010 | \$31.50 | | 10 ft | | | PDF | |
| STP-EXTH-020 | \$38.00 | | 20 ft | | | PDF | |
| STP-EXTHW-006 | \$52.00 | | 6 ft | STP-MTRHW-xxxxx(x) | Bulgin # PXP4011/06P/6065 | PDF | |
| STP-EXTHW-010 | \$63.00 | | 10 ft | | | PDF | |
| STP-EXTHW-020 | \$95.00 | | 20 ft | | | PDF | |
| STP-EXTL-006 | \$11.50 | | 6 ft | STP-MTRL-xxxxx(x) | pigtail / Molex 105308-22004 connector | PDF | |
| STP-EXTL-010 | \$14.50 | | 10 ft | | | PDF | |
| STP-EXTL-020 | \$18.00 | | 20 ft | | | PDF | |
| STP-EXTW-006 | \$51.00 | | 6 ft | STP-MTRW-xxxxx(x) | Bulgin # PXP4011/06P/6065 | PDF | |
| STP-EXTW-010 | \$62.00 | | 10 ft | | | PDF | |
| STP-EXTW-020 | \$90.00 | | 20 ft | | | PDF | |
| STP-EXT42-006 | \$26.00 | | motor to drive extension | 6 ft | STP-MTRAC-42xxxx | 10-pin / pigtail | PDF |
| STP-EXT42-010 | \$31.00 | | | 10 ft | | | PDF |
| STP-EXT42-020 | \$44.50 | | | 20 ft | | | PDF |
| STP-EXT42H-006 | \$26.00 | 6 ft | | STP-MTRACH-42xxxxx | PDF | | |
| STP-EXT42H-010 | \$31.00 | 10 ft | | | PDF | | |
| STP-EXT42H-020 | \$44.50 | 20 ft | | | PDF | | |
| STP-232RJ11-CBL* | \$11.00 | programming/ communication | 10 ft | STP-DRV-4850, STP-DRV-80100 | DB9 female / RJ11(6P4C) | PDF | |
| STP-232HD15-CBL-2** | \$17.00 | communication | 6.6 ft | STP-DRV-4850, STP-DRV-80100 DL06, D2-250-1, D2-260 | HD 15-pin male / RJ12 6-pin plug | n/a | |
| STP-232RJ12-CBL-2** | \$10.50 | communication | 6.6 ft | STP-DRV-4850, STP-DRV-80100 DL05, CLICK | RJ11 (6P4C) plug / RJ12 6-pin plug | n/a | |
| STP-CBL-CA6 | \$19.00 | control cable | 6 ft | STP-MTRD-17038 STP-MTRD-17038E | 11-pin / pigtail | PDF | |
| STP-CBL-CA10 | \$23.00 | control cable | 10 ft | | 11-pin / pigtail | PDF | |
| STP-CBL-CA20 | \$33.50 | control cable | 20 ft | | 11-pin / pigtail | PDF | |
| STP-CBL-EA6 | \$19.00 | encoder cable | 6 ft | STP-MTRD-xxxxxE STP-MTRA-ENC1, STP-MTRA-ENC3 STP-MTRA-ENC5, STP-MTRA-ENC7 STP-MTRA-ENC11, STP-MTRA-ENC13 (for line driver encoders) | 10-pin / pigtail | PDF | |
| STP-CBL-EA10 | \$23.00 | encoder cable | 10 ft | | 10-pin / pigtail | PDF | |
| STP-CBL-EA20 | \$33.50 | encoder cable | 20 ft | | 10-pin / pigtail | PDF | |
| STP-CBL-EB3 | \$60.00 | encoder cable | 3 ft | AMT112Q-V AMT112S-V (for both line driver and push-pull (totem) encoders) | 17-pin / pigtail | PDF | |
| STP-CBL-EB6 | \$83.00 | encoder cable | 6 ft | | 17-pin / pigtail | PDF | |
| STP-CBL-EB10 | \$113.00 | encoder cable | 10 ft | | 17-pin / pigtail | PDF | |
| STP-CBL-EB20 | \$187.00 | encoder cable | 20 ft | | 17-pin / pigtail | PDF | |
| STP-CBL-ED6 | \$34.00 | encoder cable | 6 ft | STP-MTRA-ENC2, STP-MTRA-ENC4 STP-MTRA-ENC6, STP-MTRA-ENC8 STP-MTRA-ENC12, STP-MTRA-ENC14 (for push-pull (totem) encoders) | 5-pin / pigtail | PDF | |
| STP-CBL-ED10 | \$46.00 | encoder cable | 10 ft | | 5-pin / pigtail | PDF | |
| STP-CBL-ED20 | \$55.00 | encoder cable | 20 ft | | 5-pin / pigtail | PDF | |
| STP-CON-1 | \$18.00 | replacement connector kit | n/a | STP-DRV-4845 & -6575 | - | n/a | |
| STP-CON-2 | \$18.00 | replacement connector kit | n/a | STP-DRV-4850 & 80100 | - | n/a | |

* Programming/communication cable STP-232RJ11-CBL is available for spare or replacement purposes.
(One cable is included with each software programmable drive.)

** Refer to the ZIPLinks Wiring Solutions section for complete information regarding cables STP-232HD15-CBL-2 and STP-232RJ12-CBL-2.

SureStep® Cables, *continued*

| SureStep Series – Stepping System Cables | | | | | | |
|--|---------|---------------------------|--------|------------------|--------------------------------|---------------------|
| Cable | Price | Purpose | Length | Use With | Cable End Connectors | Drawing |
| <u>STP-CON-3</u> | \$36.50 | replacement connector kit | n/a | STP-MTRD-xxxxR | - | n/a |
| <u>STP-CON-4</u> | \$18.00 | replacement connector kit | n/a | STP-DRVA-RC-050A | - | n/a |
| <u>STP-CON-5</u> | \$18.00 | replacement connector kit | n/a | STP-DRV-4830 | - | PDF |
| <u>STP-CON-6</u> | \$23.50 | replacement connector kit | n/a | STP-DRVAC-24025 | - | n/a |
| <u>STP-485DB9-CBL-2</u> | \$42.00 | 4-wire programming cable | 6.5 ft | STP-MTRD-xxxxR | DB9 / Phoenix 5-conductor plug | PDF |



STP-EXT(x)-0xx Extension Cable Wiring Diagram

EXT & EXTH CABLES

| PIN# | COLOR |
|------|-------|
| 1 | RED |
| 2 | WHITE |
| 3 | GREEN |
| 4 | BLACK |


EXTL CABLES

| PIN# | COLOR |
|------|-------|
| 1 | RED |
| 2 | WHITE |
| 3 | GREEN |
| 4 | BLACK |




CONNECTORS:

EXT: Molex #43020-0401
 EXTH: Molex #39-01-2041
 EXTL: TE #103653-3

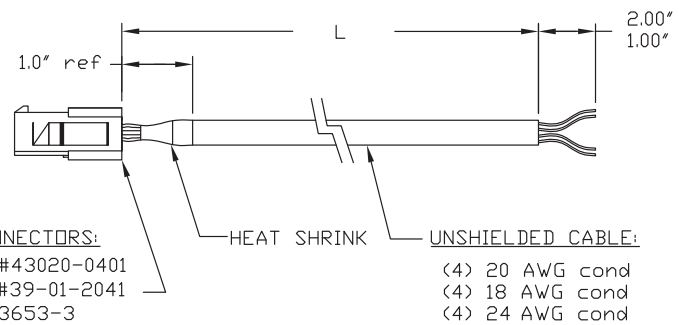

STP-EXTW-0xx and STP-EXTHW-0xx Extension Cable Wiring Diagram

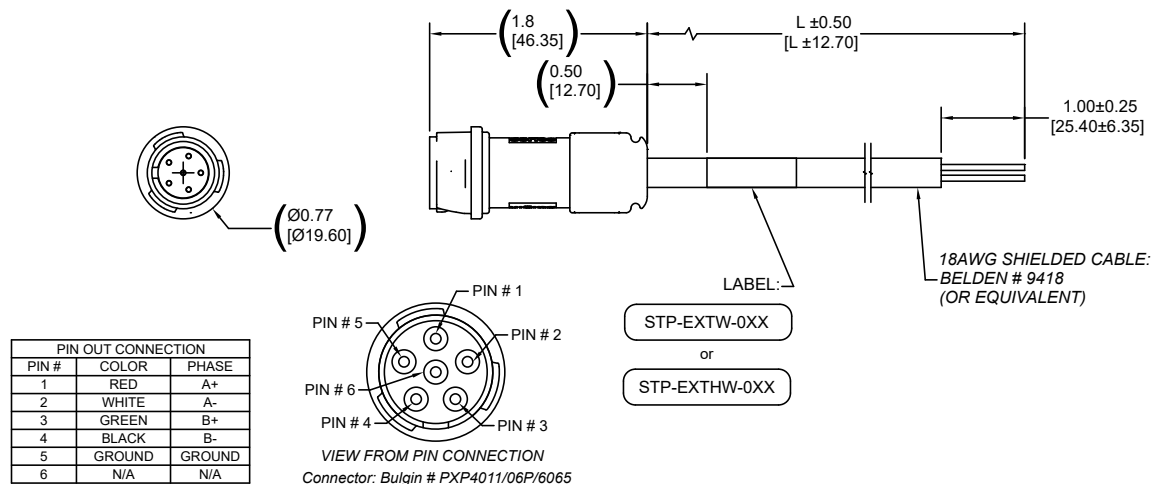



Stepping Systems with PLCs

Controller Compatibility

| High Speed Pulse Motion Control with AutomationDirect PLCs* and SureStep® Stepping Systems | | | |
|--|---|----------------------|----------------------|
| PLC Series | Starting at \$199.00 | Starting at \$310.00 | Starting at \$368.00 |
| | BX-DM1x-10 | BX-DM1x-18 | BX-DM1x-36 |
| Maximum Number of Axes | 2 | 3 | 3 |
| Output Signal Type | Sink/Source | | |
| Maximum Pulse Rate (pulses/sec) | 250,000 | | |
| Position Control | Trapezoidal Profiles (linear and S-curve ramps) | | |
| Velocity Control | Dynamic Velocity (controlled accel/decel) | | |

| High Speed Pulse Motion Control with AutomationDirect PLCs* and SureStep™ Stepping Systems | | | |
|--|--|-------------|---------------------------|
| 1–16 axis control depending on base size and power supply budget ** | | | |
| PLC Series | CPUs starting at \$361.00 | | CPUs starting at \$735.00 |
| | P2000 | | P3000 |
| I/O Modules Pulse Outputs | P2-HSO | | P3-HSO |
| Maximum Number of Axes | 2 per module, 22 per PLC rack, 44 per PLC system | | |
| Output Signal Type | Line Driver | Sink/Source | Line Driver Sink/Source |
| Maximum Pulse Rate (pulses/sec) | 1,000,000 | 500,000 | 1,000,000 500,000 |
| Position Control | Trapezoidal Profiles (linear and S-curve ramps) | | |
| Velocity Control | Dynamic Velocity (controlled accel/decel) | | |
| Maximum Number of Modules | 11 per PLC rack, 22 per PLC system | | |

| High Speed Pulse Motion Control with AutomationDirect PLCs* and SureStep® Stepping Systems | | | |
|--|---|---|----------------------|
| PLC Series | Starting at Retired | Starting at \$212.00 | Starting at \$392.00 |
| | DL105 | DL05 | DL06 |
| Built-In PLC Pulse Outputs | 1 axis pulse output included with the PLC base unit | | |
| Maximum Number of Axes | 1 axis control** | 1-2 axis control*** | 1-5 axis control*** |
| Maximum Pulse Rate (pulses/sec) | 7,000 | | 10,000 |
| Position Control | Trapezoidal Profiles (linear only) | | |
| Velocity Control | Velocity Levels (no ramps available when changing velocity) | | |
| I/O Modules Pulse Outputs | Not Applicable for DL105 | H0-CTRIO2 (1 axis per module) | |
| Maximum Pulse Rate (pulses/sec) | | 65,000 | |
| Position Control | | Trapezoidal Profiles (linear & S-curve ramps) | |
| Velocity Control | | Dynamic Velocity (controlled accel/decel) | |
| Maximum Number of Modules | | 1 | 4 |

* Any PLC capable of RS-232 ASCII communication can write serial commands to the STP-DRV-4850, -80100 Drives. Any PLC capable of RS-485 ASCII communication can write serial commands to the Advanced Integrated drives. Most AutomationDirect PLCs will communicate using either RS-232 or RS-485 communications, however we recommend using either Click, Productivity, or BRX (DoMore) as they are modern PLCs. DirectLogic will also work but is older technology.

** When using DC output models only. *** When using either DC output model or H0-CTRIO option module.



Stepping Systems with PLCs

Controller Compatibility (continued)

| High Speed Pulse Motion Control with AutomationDirect PLCs* and SureStep™ Stepping Systems | | | | |
|--|---|-----------------------|----------------------------------|-----------------------|
| <i>1–16 axis control depending on base size and power supply budget **</i> | | | | |
| PLC Series | CPUs starting at Retired | | CPUs starting at \$411.00 | |
| | DL205 | | Do-more | |
| I/O Modules Pulse Outputs | D2-CTRINT (1 axis per module) | H2-CTRIO2 (2 axes) | T1H-CTRIO (2 axes per module) | H2-CTRIO2 (2 axes) |
| Maximum Pulse Rate (pulses/sec) | 5,000 | 65,000 | 25,000 | 250,000 |
| Position Control | Trapezoidal Profiles (linear and S-curve ramps) | | | |
| Velocity Control | Dynamic Velocity (controlled accel/decel) | | | |
| Maximum Number of Modules | 1 | 1-8 | | |

* Any PLC capable of RS-232 ASCII communication can write serial commands to the STP-DRV-4850, -80100 Drives. Any PLC capable of RS-485 ASCII communication can write serial commands to the Advanced Integrated drives. Most AutomationDirect PLCs will communicate using either RS-232 or RS-485 communications, however we recommend using either Click, Productivity, or BRX (DoMore) as they are modern PLCs. DirectLogic will also work but is older technology.

** using D2-CITRANT or Hx-CTRIO modules.