

AUTOMATIONDIRECT.com



**Gladiator**  
from AutomationDirect

**E-T-A**  
ENGINEERING TECHNOLOGY

**LITZE**  
SYSTEMATIC TECHNOLOGY

**RHINO**  
AUTOMATIONDIRECT

**INTERNATIONAL  
POWER**  
DC POWER SUPPLIES

**WAGO**

**BLOCK**

**Achieve**

## Power Supplies & Electronic Circuit Protection



Up-to-date price list:  
[www.automationdirect.com/pricelist](http://www.automationdirect.com/pricelist)

FREE Technical Support:  
[www.automationdirect.com/support](http://www.automationdirect.com/support)

FREE Videos:  
[www.automationdirect.com/videos](http://www.automationdirect.com/videos)

FREE Documentation:  
[www.automationdirect.com/documentation](http://www.automationdirect.com/documentation)

FREE CAD drawings:  
[www.automationdirect.com/cad](http://www.automationdirect.com/cad)



# DC Power Supplies

## What is a power supply?

Industrial power supplies convert AC power to DC power for manufacturing and process equipment such as PLCs, HMIs, relays, sensors, actuators, and drives. Most common are linear power supplies and switching power supplies.



The main difference between switching and linear power supplies is how they convert AC to DC output voltage. Switching power supplies first rectify the AC line supply and then transform it, while linear power supplies first transform the AC supply, then rectify it. Switching power supplies, intended for general use in automation, have better efficiency, less heat loss, wider input voltage ranges, and smaller size and weight. Linear power supplies have fewer harmonics and have more precise output regulation.

Considerations when selecting a power supply:

- Input voltage
- Output voltage
- Output current
- Mounting
- Environmental ratings

## Input Voltage

The typical input voltage range for a power supply is 120-240VAC single-phase. However, power supplies are available that accept 3-phase inputs; some even take DC inputs.

## Output Voltage

Power supplies have standard DC output voltages such as 5, 12, 24, and 48 VDC. They usually come with an adjustment potentiometer to trim the output by approximately +/- 10%, and a built-in DC OK LED indicator and contact to provide alerts for overload conditions.

## Output Current

When DC power is required, it is crucial to calculate the worst-case current draw of all devices powered from the DC supply. Some loads require a higher starting current, which can be several times their nominal operating full-load current. For example, a capacitive load appears as a short circuit with a high current draw until the capacitor reaches full charge. When selecting a power supply, it is critical to account for this additional inrush current. Some power supplies provide short-term reserve power to handle this extra load, eliminating the need for oversized power supplies and their associated costs.

Applications with high output requirements call for power supplies that can handle power peaks. High-efficiency power supplies reduce losses, save cabinet space, and increase energy savings. Intelligent load management reliably powers equipment and protects it at the same time. Parameterizable overload behavior provides configurable current and switching modes allowing you to tailor your power supply to meet your system requirements.

## Mounting

Power supplies are typically DIN-rail mounted; however, open frame and panel mount power supplies offer more flexibility because they can easily be screw-mounted in three different orientations. Machine mount supplies mount directly to the equipment without requiring an enclosure, even when used outdoors.

## Environmental Ratings

Some power supplies are Class 1, Div 2 rated, making them suitable for use in hazardous locations. Others offer rugged machine mount options with IP67 and NEMA 4X ratings for harsh outdoor environments. Encapsulated power supplies come in ultra-compact, low-profile housings and are ideal for space-limited applications. Open frame power supplies are very cost-effective; however, they have little or no protection from the elements. They must be mounted in a suitable enclosure or have a conformal coating to protect them from dust, humidity, and contamination.

## Overload, Overvoltage, and Thermal Protection

Many power supplies have built-in protection for transient surges, overloads, short circuits, and overvoltage protection. NEC Class 2 power supplies limit voltage and current output, making them less of a shock and fire hazard. Using NEC Class 2 circuits means reduced and less expensive wiring methods and over-current protection requirements. Also, the testing and approval process is much easier.

## DC Ripple

Ripple is the amplitude of the AC component that rides on a DC voltage output. A typical rating for most applications is 100mV peak-to-peak. It is necessary to determine the amount of ripple that powered devices can tolerate and then select a power supply that meets the most stringent requirement.


## Output De-rating for Power Supplies

Manufacturers offer a way to extend a power supply's input voltage and temperature rating when it is run at a decreased capacity. As a result, they often publish derating curves in their specifications to illustrate the relationship between temperature or input voltage and output capacity.

## Output Load De-rating vs. Surrounding Air Temperature

Power supplies have a maximum temperature threshold for 100% output capacity. It is common for manufacturers to allow a derating for temperatures above this threshold. Power supplies are affected by temperature and will fail if used above their maximum temperature rating. As a result, manufacturers provide a derating curve to show the relationship between temperature and safe output level.

The following illustration shows the derating curve for a RHINO PRO PSD24-120-L power supply. The power supply must be derated from 100% output at 50 C [122 F] to 50% at 70 C [158 F] horizontally mounted. However, if vertically mounted, it is derated from 100% at 60 C [140 F] to 75% at 70 C [158 F].

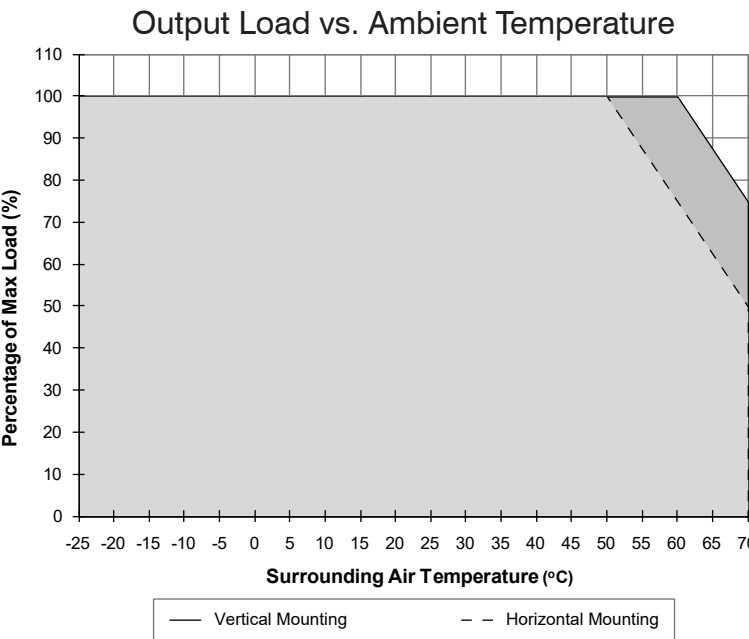


RHINO PRO PSD24-120-L Temperature Derating Curve

## Output Load De-rating vs. Input Voltage

A derating curve shows the relationship between the input voltage and the maximum allowable output level. Manufacturers often require derating when the input voltage falls below the minimum threshold specified. The following curve shows the derating curve for a RHINO TOUGH PSX-24-120 power when the input voltage drops below 120 VAC.

Following these derating practices will increase the life and reliability of a power supply and prevent premature failure.

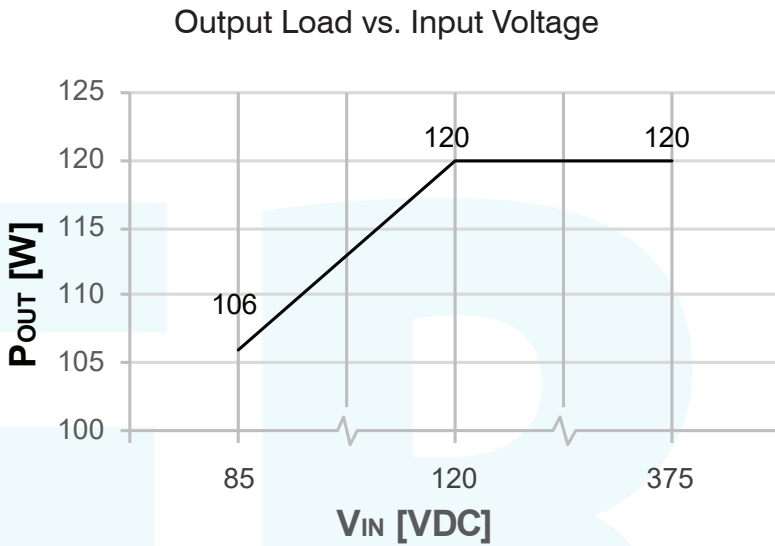

RHINO TOUGH PSX-24-120 Input De-rating Curve

Power Supply Comparison Chart

Switching Power Supply Feature Comparison								
Power Supply Series	Functionality	Price (\$-\$\$\$\$)	Case	Mount	UL	HazLoc Rated	NEC Class 2	Output Power (W)
RHINO PSS	BASIC	\$	Metal	Panel	✓	✗	✗	35 - 100
Achieve PSA	BASIC	\$	Metal/Plastic	DIN Rail	✓	✗	✗	75 -480
RHINO PSL	BASIC	\$\$	Low-Profile, Plastic	DIN Rail	✓	✗	✓	7.5 - 91.2
RHINO PSV	BASIC	\$	Metal/Plastic	DIN Rail	✓	✗	✓	15 - 480
RHINO PSE*-S	BASIC	\$\$	Compact, Plastic, Encapsulated	DIN Rail/Panel	✓	✗	✗	10 - 60
RHINO PSR	BASIC	\$\$	Metal	DIN Rail	✓	✗	✗	120 - 960
FA	BASIC	\$\$	Open Frame	DIN Rail	✓	✓	✗	30 - 89
BLOCK PM	BASIC	\$\$	Plastic	DIN Rail	✓	✗	✓	24 - 96
WAGO Eco2	BASIC	\$\$	Metal/Plastic	DIN Rail	✓	✓	✗	30-240
RHINO PSS*-U	STANDARD	\$	Metal	Panel	✓	✗	✗	151
RHINO PSC	STANDARD	\$\$\$	Low-Profile, Plastic	DIN Rail	✓	✗	✓	12 - 90
RHINO PSB	STANDARD	\$	Metal/Plastic	DIN Rail	✓	✓	✗	60 - 960
RHINO PSP	STANDARD	\$\$\$	Compact, Plastic	DIN Rail/Panel	✓	✗	✗	20 - 240
RHINO PSM	STANDARD	\$\$\$\$	Metal	DIN Rail	✓	✗	✗	78 - 600
RHINO PSFA	STANDARD	\$	Metal	Panel	✓	✗	✗	60
LUTZE CPS	PERFORMANCE	\$\$\$	Metal	DIN Rail	✓	✗	✗	120 - 960
RHINO PSN	PERFORMANCE	\$\$\$	Metal	DIN Rail	✓	✗	✗	80 - 960
RHINO PSRP	PERFORMANCE	\$\$\$\$	Metal	DIN Rail	✓	✗	✗	120 - 960
RHINO PSD	PERFORMANCE	\$\$\$\$	Metal/Plastic	DIN Rail	✓	✗	✗	120 - 480
RHINO PSH	PERFORMANCE	\$\$\$	Metal	DIN Rail	✓	✓	✗	80 - 480
WAGO Pro2	PERFORMANCE	\$\$\$	Metal	DIN Rail	✓	✗	✗	120 - 960
RHINO PSX	TOUGH	\$\$\$\$	Metal-Outdoor	Chassis	✓	✓	✗	96 - 120
RHINO PSRT	TOUGH	\$\$\$	Metal-Outdoor	Chassis	✓	✗	✓ (100W)	91.2 - 192

Switching power supplies at great prices!

DIN Rail Mount Power Supplies

AchieVe™ PSA Series Power Supplies

AchieVe PSA series value power supplies offer prices well below the competition and are ideal for price-sensitive users who require basic yet reliable power output for general industrial applications. Their overcurrent protection is designed to operate in constant current mode, making the PSA series suitable for inductive and capacitive load applications.

- Universal 85-264 VAC/120-375 VDC input voltage
  - 12, 24, or 48 VDC adjustable output options
  - 75, 120, 240, and 480 Watt models
- Up to 90% efficiency
  - Plastic or aluminum housings (depending on model)

Starting at  
**\$25.50**  
(PSA-24-75)



Starting at  
**\$29.00**  
(PSL-12-010)

RHINO PSL Series Low-Profile Power Supplies

RHINO PSL series power supplies are plastic low-profile switching supplies that are UL508 listed and UL60950-1 recognized for NEC Class 2\* compliance in industrial, commercial, and residential applications.

- Universal 90 - 264 VAC/125-375 VDC input voltage
  - 5, 12, or 24 VDC adjustable outputs
  - 7.5 to 91.2 Watts
- Output current limit
  - Plastic-housed low-profile form factor
- \* PSL-12-090 is not NEC Class 2

RHINO PSV Series Value Power Supplies

The RHINO PSV value series offers economical power supplies in a wide selection of voltage and wattage ranges. The 15-100 W models feature ultra-compact plastic housings and are NEC Class 2 compliant.

- Universal 85-264 VAC input voltage
  - 5, 12, 24, or 48 VDC outputs
  - Ultra-compact sizes
- Up to 89.0% efficiency
  - Metal or plastic housings

Starting at  
**\$27.00**  
(PSV5-15S)



Starting at  
**\$69.00**  
(PSR-24-120)

RHINO PSR Series Power Supplies

RHINO PSR series DIN rail mount high-efficiency industrial power supplies feature an ultra-slim design in a rugged aluminum housing. These economical power supplies offer overcurrent protection in constant current mode, making them suitable for charging applications.

- 120/240 VAC single-phase or 480 VAC three-phase input options
  - Up to 40A (960W) output current
  - 24-28 VDC adjustable outputs
- Up to 94.5% efficiency
  - Built-in DC OK relay and LED indicator
  - IP20 finger-safe protection rating



# DIN Rail Mount Power Supplies (cont.)

## BLOCK PM Series Power Supplies

BLOCK PM series power supplies can be used in a variety of applications, including solar, measurement, control technology, and especially plant and mechanical engineering. They feature a light and compact design, are robust and adaptable for a range of applications, and provide outstanding protection against transients and high-energy interference pulses.

- Universal 85-264 VAC/120-372 VDC input voltage
- 12 or 24 VDC adjustable outputs
- 24 to 96 Watts
- Rugged thermoplastic housing
- Up to 89% efficiency
- Built-in DC OK relay and LED indicator
- Select models are NEC Class 2 compliant
- IP20 finger-safe protection rating



Starting at  
**\$49.50**  
(PM-0124-010-0)



Starting at  
**\$62.00**

## WAGO Eco2 Series Power Supplies

WAGO Eco2 series power supplies offer performance and value, featuring high efficiency and a compact, space-saving design, making them ideal for space-limited applications. These economical power supplies provide reliable performance and long service life for a variety of applications, such as industrial automation, building management systems, machine control, and robotics.

- Universal 90-264 VAC input voltage
- 24 VDC adjustable output
- 30, 60, 120, and 240 Watts
- Up to 90% efficiency
- Metal or plastic housings
- Built-in DC OK relay and LED indicator
- UL approved for Class 1, Div 2 hazardous locations

## RHINO SELECT PSC Series Low-Profile Power Supplies

RHINO SELECT PSC series power supplies are plastic low-profile housed switching supplies available in 5, 12, and 24 VDC adjustable output models. They are UL508 listed and UL1310 recognized for NEC Class 2 compliance in industrial, commercial, and residential applications.

- Universal 85 to 264 VAC input voltage
- Output current limit
- 5, 12, or 24 VDC adjustable outputs
- 12 to 90 Watts
- Plastic-housed, low-profile



Starting at  
**\$63.00**  
(PSC-05-012)

# DIN Rail Mount Power Supplies (cont.)

## RHINO SELECT PSB-S Series Power Supplies

RHINO SELECT PSB-S series power supplies offer high performance and reliability at a low cost. They feature rugged aluminum housings, conformal coated circuit boards, and select models offer approval for Class 1, Division 2 hazardous locations.

- Universal input, 85-264 VAC / 120-375 VDC single-phase or 320-600 VAC three-phase input
- 12, 24, or 48 VDC outputs, 15 to 960 Watts
- Overload, overvoltage and thermal protection
- 24 VDC output, single phase input models
- for Class 1, Div 2 hazardous locations
- 24 VDC (adjustable), 40A (960W) output, 320-600 VAC 3-phase model



Starting at  
**\$49.50**  
(PSB24-060S)

## RHINO SELECT PSP Series Slimline Power Supplies

RHINO SELECT PSP series slimline power supplies are plastic housed ultra-compact switching power supplies that offer an excellent price/performance ratio. They feature universal inputs, adjustable DC voltage outputs, and low output ripple.

- Universal input 120/240 VAC or 85-264 VDC
- 20 to 240 Watts
- 5 VDC, 20 W, 4 A output
- 12 VDC from 24 to 120 Watts
- 24 VDC from 24 to 240 Watts
- Compact footprint
- Plastic housing
- Overload and overvoltage protection



Starting at  
**\$86.00**  
(PSP05-020S)

## RHINO SELECT PSM Series Industrial Grade Power Supplies

RHINO SELECT PSM series power supplies are industrial grade switching DC output supplies with a sturdy steel case to withstand harsh environments. Autoselect inputs for 115 VAC or 230 VAC and international agency approvals make the RHINO PSM series suitable for worldwide use.

- Universal 100/230 VAC input voltage
- Industrial grade
- Sturdy metal case
- 12 VDC from 78 to 156 Watts
- 24 VDC from 90 to 600 Watts
- Low output ripple
- Specialty modules for redundancy, power backup and UPS
- Overload and overvoltage protection




Starting at  
**\$139.00**  
(PSM24-090S)



# DIN Rail Mount Power Supplies (cont.)

**LUTZE AUTOMATION** Compact Switching Power Supplies

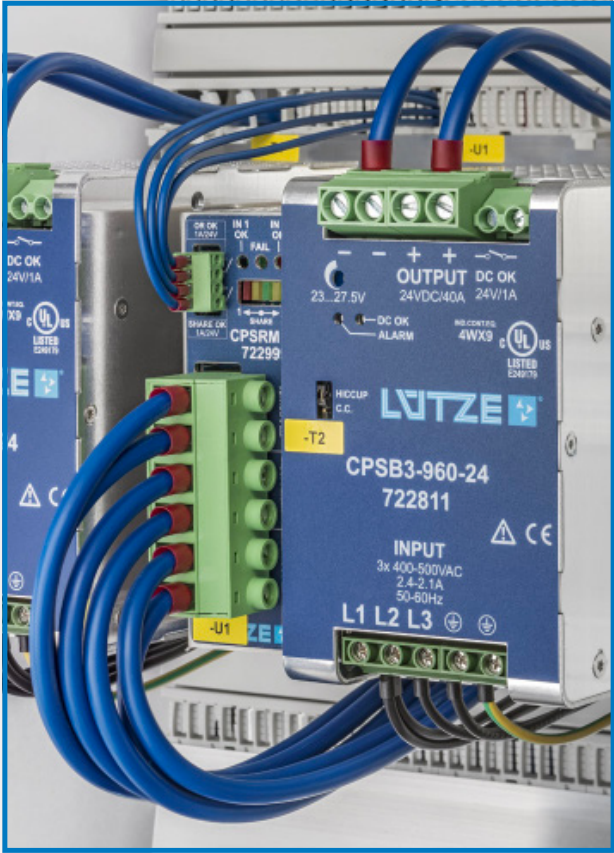

LUTZE®, a well-known name in the automation industry for over 60 years, manufactures a wide range of dependable products including quality, economical, and reliable compact power supplies. LUTZE® applications where high inrush power is essential

and where space-saving designs and long-lasting operation are desired. These power supplies are smaller than the industry standard, yet still operate with supreme efficiency using advanced digital technology.

# LUTZE AUTOMATION Power Supplies (cont.)

## CPS ECO Series Switching Power Supplies

LUTZE® ECO series 24 VDC single-phase power supplies were developed with the newest technical innovations in mind. This compact, economical series of power supplies provides up to 91% power conversion efficiency. The output voltage adjustment provides easy tuning of desired voltage.

- Compact footprint fits any tight space application
- Status indicators and output relay allows remote monitoring
- Aluminum housing
- 35mm DIN rail mount
- IP20 rated
- Available in 120, 240, or 480W models
- 5 year warranty

## ECONOMY LINE



## ULTRA COMPACT



## CPS Ultra Series Switching Power Supplies

LUTZE® Ultra series 24 VDC single-phase power supplies are compact units that are 50% smaller than standard industrial power supplies, which results in considerable space and money savings. This series provides up to 93% power conversion efficiency.

- Compact footprint even smaller than ECO series
- Status indicators and output relay allows remote monitoring
- Power boost - 150% for 5s
- Aluminum housing
- 35mm DIN rail mount
- IP20 rated
- Available in 120, 240, or 480W models
- 5 year warranty

## WITH POWER BOOST



## CPS 3-Phase Series Switching Power Supplies

LUTZE® compact 3-phase series 24 VDC power supplies have an efficiency rating of over 91%, which means low power loss and low heat dissipation. The integrated power boost function allows higher peak loads to be energized for a short period of time. In addition, this unit has the convenience of allowing remote ON/OFF control to significantly reduce energy consumption.

- Compact footprint fits any tight space application
- Status indicator and output relay allows remote monitoring
- Aluminum housing
- 35mm DIN rail mount
- IP20 rated
- Available in 120, 240, or 960W models
- 5 year warranty

## CPS Universal Series Switching Power Supplies

LUTZE® Universal series 24 VDC power supplies provide high efficiency, compact size, and power boost while allowing maximum installation flexibility. These units offer 1-, 2-, or 3-phase inputs, making them a versatile power supply that can be used for many applications.

- Compact footprint fits tight applications
- Status indicators and output relay allows remote monitoring
- Aluminum housing
- 35mm DIN rail mount
- IP20 rated
- Available in 240 or 480W models
- 5 year warranty

## MAX FLEXIBILITY





# High Performance Power Supplies

## RHINO PRO High Performance PSN Series Power Supplies

RHINO PRO PSN series high performance 24 VDC switching power supplies are available with single-phase and three-phase inputs, universal AC input voltage range, and a built-in constant current circuit for charging applications.

- Universal AC input voltage range (single-phase units)
- Built-in constant current circuit for charging applications (three-phase units)
- Active Power Factor Correction (PFC) - Active input current wave shaping, high frequency filtering, and source current feedback sensing for waveform control
- Power Boost of 150% up to 7 seconds
- Advanced Power Boost (APB) – ensures continuous operation when a large inrush current is detected due to faulty load on a multiple load connection
- DC OK contact and LED indicator for DC OK/Overload



Starting at  
**\$97.00**  
(PSN24-080)



Starting at  
**\$204.00**  
(PSD24-120-L)

## RHINO PRO High Performance PSD Series with LCD

RHINO PRO PSD series versatile 24 VDC switching power supplies feature an LCD which displays output current, output voltage, peak hold current, lifetime expectancy, and ambient temperature data.

- Universal AC input voltage range
- Lifetime expectancy alarm signal and monitoring
- Built-in active Power Factor Correction with up to 94% efficiency
- Power Boost of 150% up to 7 seconds
- LCD display of output current / voltage / peak current and temperature
- Advanced Power Boost (APB) – protects system to ensure continuous operation when large inrush current detected due to faulty load on a multiple load connection
- DC OK contact and LED indicator for DC OK Overload

## RHINO PRO High Efficiency PSH Series Power Supplies

RHINO PRO PSH series power supplies offer best-in-class efficiencies up to 94.5%, temperature performance range of -25°C to 70°C, and agency approvals for extreme conditions. They are UL 508 and hazardous location listed, UL 60950 recognized, ATEX certified, CE marked, and RoHS compliant.

- Universal 85 to 264 VAC input voltage
- Up to 94.5% efficiency
- 12, 24, or 48 VDC outputs
- Short circuit and overload protection
- 80 to 480 Watts



Starting at  
**\$118.00**  
(PSH-48-080)




Starting at  
**\$156.00**  
(PSRP-24-120)

## RHINO PRO Compact PSRP Series

RHINO PRO PSRP series power supplies offer a sleek, space-saving design with push-in connectors and a rugged aluminum housing.

- Up to 94.8% efficiency
- 12 or 24 VDC outputs
- 120 to 960 Watts
- Short circuit and overload protection

## WAGO Pro2 Series Power Supplies and Modules

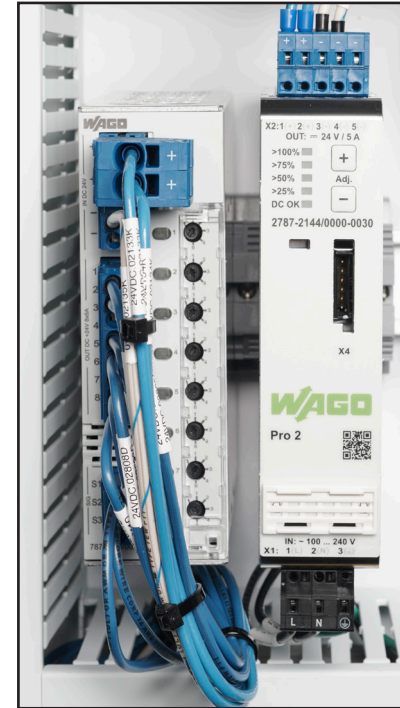

WAGO Pro2 series high-efficiency power supplies reduce losses, save cabinet space, and increase energy savings. With TopBoost, PowerBoost, and configurable overload behavior, the WAGO Pro2 power supply protects equipment and provides intelligent current and switching modes.

- TopBoost provides a 600% current pulse for 15 milliseconds which safely trips downstream circuit breakers, dropping out problem circuits with high overload or short-circuit conditions
- PowerBoost allows 150% output current for five seconds to reliably power high in-rush loads
- 12, 24, or 48 VDC outputs
- 120 to 960 Watts
- Configurable overload behavior
- Configurable digital signal input and output, optical status indication, function keys
- Free configuration and monitoring software
- Suitable for both parallel and series operation
- Single and three-phase models



Starting at  
**\$185.00**

## Configuration and Monitoring Software

The free configuration software for WAGO Pro2 series power supplies includes long-term monitoring for preventative maintenance and service to help prevent costly downtime.

## WAGO Pro2 Communication Modules

WAGO Pro2 communication modules easily snap into place as an add-on to the Pro2 power supplies. These modules support various communication protocols with their respective communication ports, allowing connectivity to PLCs for programming and monitoring. Communication modules also provide accessibility to select features and real-time data gathered by the power supplies.

Quick and easy connectivity with Productivity, CLICK, and Do-More PLCs



## Pro2 Communication Module

Communication Ports (Remove Cover)


### Protocols Available

- Modbus RTU - with (2) RS-485 (RJ45) ports
- EtherNet/IP - with (2) Ethernet 10/100 Base-T (RJ45) ports
- Modbus TCP/IP and UDP/IP - with (2) Ethernet 10/100 Base-T (RJ45) ports
- IO-Link - with (1) 3-position removable terminal port

Starting at  
**\$71.00**

Examples of data and settings that can be accessed with the Pro2 communication modules:

- Output On
- "Active droop" parallel mode
- Overload limit active
- Enable switching the DC output ON and OFF via cyclic process data
- Constant current
- Constant current (latching mode)
- Hiccup mode
- Electronic circuit breaker
- Latching after thermal overload
- Power Boost
- Top Boost

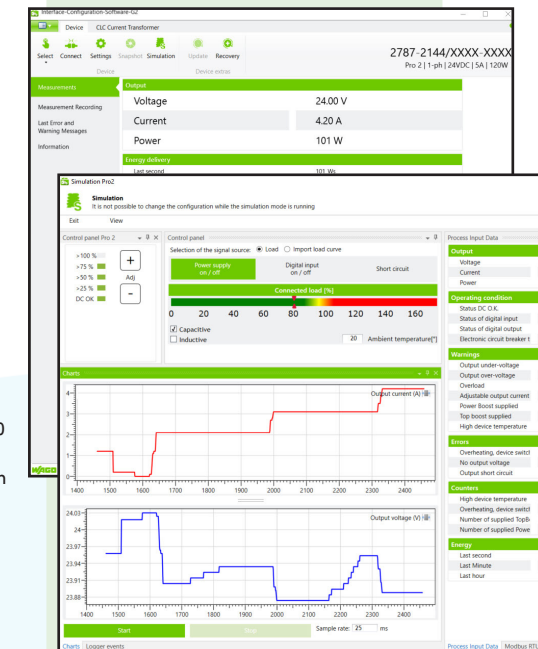

**FREE Configuration and Monitoring Software!**  
[Click here to download](#)



# Rugged Machine Mount Power Supplies



Starting at  
**\$327.00**  
(PSX-24-120)

## RHINO TOUGH PSX Series

Rugged RHINO TOUGH series machine mount power supplies are perfect for applications that require a dependable DC power supply in harsh environments.

- 12 or 24 VDC outputs
- Universal input 85 to 264 VAC
- Hazardous location Class I, Div 2
- IP67 and NEMA 4X protection rating

## RHINO TOUGH PSRT Series

RHINO TOUGH PSRT series machine mount power supplies are designed for industrial applications outside of the control cabinet. These field-mountable power supplies offer a compact footprint and allow machine mounting near the load.

- Up to 94.4% efficiency
- 24 VDC output
- Universal input 90 to 264 VAC
- IP67 protection rating

Starting at  
**\$263.00**  
(PSRT-24-100)



# Encapsulated Chassis Mount Power Supplies

Encapsulated chassis mount power supplies provide maximum environmental protection for reliable DC power. These ultra-compact power supplies feature a low-profile footprint in a rugged thermoplastic

housing. They offer easy chassis mounting or DIN rail mounting using an optional DIN rail mounting kit (purchase separately).



Starting at  
**\$66.00**  
(PSE12-115)

## RHINO PSE Series

RHINO PSE series power supplies are ideal for commercial and industrial applications in dirty and dusty environments. They come fully encapsulated in ultra-compact, low-profile housings and are suitable for space-limited applications.

- 78% efficiency
- 5, 12, +/-12, +/-15, 15, and 24 VDC output voltage options
- Single or dual output models
- 120/240 VAC or 120-370 VDC input options
- 15 to 60 Watts

## RHINO PSE\*-S Series

RHINO PSE-S series encapsulated power supplies feature a wide input voltage range, a compact thermoplastic housing, and are suitable for industrial, household, and building technology applications.

- Up to 89% efficiency
- 5, 12, 15, and 24 VDC output voltage options
- Universal 100-277 VAC/100-250 VDC input voltage
- Select models are NEC Class 2 compliant
- 10 to 50 Watts

Starting at  
**\$21.50**  
(PSE24-110-S)



# Enclosed Chassis Mount Power Supplies



Starting at  
**\$43.50**  
(PSS24-155-U)

## RHINO SELECT PSS\*-U Series

RHINO SELECT PSS\*-U series industrial chassis mount power supplies include a UPS function to prevent downtime due to unexpected power loss. These power supplies seamlessly switch to battery operation without any interruption in output (battery sold separately).

- Up to 88% efficiency
- 12 or 24 VDC output voltage options
- Zero cut-over time from loss of AC to battery operation
- 90-132 or 180-264 VAC input voltage options
- 151 Watts

## RHINO PSS-S Series

RHINO PSS series chassis mount power supplies are perfect for applications requiring a basic DC power supply. These budget power supplies offer reliable performance without the additional features used in higher cost power supplies.

- Up to 90% efficiency
- 5, 12, or 24 VDC output voltage options
- Single or dual output models
- 120/240 VAC, 100-240 VAC, or 126-376 VDC input options
- 35 to 100 Watts

Starting at  
**\$13.00**  
(PSS12-035-S)



# Linear Power Supplies

Regulated and unregulated open frame linear power supplies offer several advantages, including low output ripple, high output voltage accuracy, and low output noise. They are relatively simple in design and generate minimal electromagnetic interference (EMI) due to the absence of high-frequency switching components.

## Regulated Open Frame Linear Power Supplies

### INTERNATIONAL POWER DC POWER SUPPLIES IH Series Regulated Open Frame Linear Power Supplies




International Power IH series regulated open frame linear power supplies are designed to operate over a wide range of AC power sources. They maintain a constant output voltage, regardless of changes in input voltage or load variations, and offer better voltage regulation than other types of power supplies, ensuring accurate and consistent power delivery.

- 5, 12 to 15,  $\pm 12$ ,  $\pm 15$ , or 24 VDC outputs
- 100/120/220/230-240 VAC input ranges
- Overvoltage protection on 5 VDC outputs
- $\pm 0.05\%$  regulation
- Made in USA

Starting at  
**\$77.00**  
(IHB5-3-OVP)

## Unregulated Open Frame Linear Power Supplies

### INTERNATIONAL POWER DC POWER SUPPLIES IP500U Series Unregulated Open Frame Linear Power Supplies

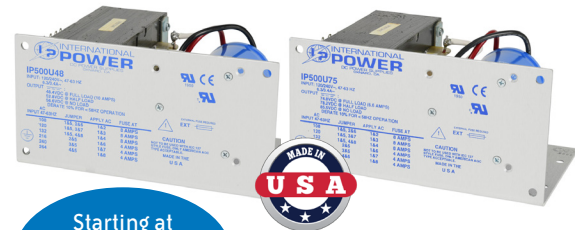

International Power IP500U series unregulated open frame linear power supplies are designed for low-cost, high-current applications when full regulation is not required. These rugged, highly reliable power supplies are ideal for powering solenoids, relays, DC motors, battery chargers, and DC-to-DC converters.

- 36, 48, or 75 VDC outputs
- Isolated 100/240 VAC input
- Secondary fuse protection
- Made in USA

Starting at  
**\$350.00**  
(IP500U36)



### SureStep® Unregulated Open Frame Linear Power Supplies

SureStep unregulated open frame linear power supplies offer full load outputs of 32 VDC/4A, 48 VDC/5A, 48 VDC/10A, 70 VDC/5A; and are perfectly suited to provide power for stepper drives and stepper motors.

- 120/240 VAC selectable input
- Less susceptible to motor regeneration than switching supplies
- Fusing included for both incoming AC and outgoing DC
- All models have an additional 5 VDC, 500 mA regulated logic supply with electronic overload protection

Starting at  
**\$150.00**  
(STP-PWR-3204)

# Open Frame Power Supplies

Open frame switching power supplies are a compact, inexpensive option for DC power needs. With up to 90 Watts of output power, these flexible power supplies require only convection cooling for full-power operation. Units with UPS functionality are available.



Starting at  
**\$35.50**  
(PSFA24-060-U)

### PSFA Series

- Offers battery switchover capability
- Output Power: 60 W

### FA Series

- Hazardous location rating at a low cost
- Output Power: 30 to 89 W

# Reliable DC-to-DC Converters

## What is a DC-to-DC converter?

DC-to-DC converters provide reliable, overload and short-circuit protected, adjustable outputs when an application requires a different DC voltage than what is readily available. They have excellent voltage regulation, taking a varying input voltage and providing a stable output voltage. They isolate sensitive electronic equipment and can filter spikes, noise, and ripple in problem circuits.

## DIN Rail Mount DC-to-DC Converters

RHINO and WAGO DIN-rail mount DC-to-DC converters accept a wide range of DC source inputs and convert them to the required voltage levels. Slim-case models are perfect for space limited applications; an isolated converter helps eliminate ground loops.



Starting at  
**\$51.00**  
(2000-5420-1399-0987)

### RHINO PSP Series

Features a wide input range to support all popular DC voltage systems

### RHINO FA-DCDC-1 Series

Eliminates ground loops and addresses isolation issues when interfacing to PLC analog I/O modules

### WAGO Terminal Block Style

Terminal-block style DC-to-DC converters optimize cabinet space

### WAGO PNP/NPN Converter

Easily convert a signal from PNP to NPN or vice-versa



# Encapsulated Chassis Mount DC-to-DC Converters

Encapsulated DC-to-DC converters provide maximum environmental protection for reliable DC power. These low-profile, plastic and aluminum housed units accept a wide range of DC inputs and convert them to the needed voltage levels, and offers features such as remote on/off control and overload protection.

## RHINO PSE Series DC-to-DC Converters

RHINO PSE Series DC-to-DC converters offer ultra-wide input voltage ranges that allow these models to operate from all popular DC supply voltage systems.



Starting at  
**\$92.00**  
(PSE05-DC12-40)



Starting at  
**\$215.00**  
(PSRP-12-DC24-150)

## RHINO PRO PSRP Series DC-to-DC-Converters

RHINO PRO industrial DC-to-DC converters feature robust protection ratings, such as high EMC immunity, shock and vibration resistance, and thermal shock resistance. They provide constant current output at 100% load and are ideal for battery charging applications.

# Specialty Modules

Specialty modules for DC power supplies include redundancy, buffer, and battery control modules to provide steady, reliable power even through a power failure. Build a backup system or DC UPS with these practical, low-cost modules.

## Battery Control Modules

The battery control module, when combined with a DC power supply, makes a perfect DC UPS (uninterruptible power system) by providing the means to charge and monitor an external lead acid battery.

- For use with 24 VDC or 48 VDC (PSH only) bus voltages; 12 or 24 volt battery
- Redundant inputs or can be paired with RHINO redundancy modules for more reliable power systems
- Battery protection for over voltage, over current, over temperature, deep discharge, reverse connection and battery overcharge
- 7.5, 10, 15 and 40A ratings
- DIN rail mounted
- Universally compatible battery controller modules available



Battery Control Module Feature Comparison								
Series	Price	Case	Compatibility	# of Inputs	Battery Type	Temperature Sensor Compatible	UL	Output Voltage/ Amp/Power Rating
PSB	\$66.00	Metal	Universal	One power supply	24V sealed lead acid	✗	✓	24 VDC / 40A / 960W
PSL	\$34.50	Low-Profile, Plastic	Universal	One power supply	24V sealed lead acid	✗	✓	24 VDC / 10A / 240W
PSM	\$222.00	Metal	Requires RHINO PSM24 power supply	One power supply	24V sealed lead acid	✓	✗	24 VDC / 15A / 360W
PSH	\$274.00	Metal	Universal	Redundant inputs for two independent power supplies	12V sealed lead acid	✓	✗	24 VDC / 15A / 360W 48 VDC / 7.5 A / 360W

Starting at  
**\$34.50**  
(PSL-24-BCM240)



Buffer Modules

The buffer module will maintain the output voltage of a 24 VDC power supply after brownouts or voltage dips for up to 4 seconds depending on load.

- Corrosion-resistant aluminum housing available
- Connect modules in parallel to increase buffering time
- Class I Division 2 hazardous location ratings offered
- Storage capacity does not deteriorate over the lifetime of the unit
- Start buffering voltage adjustment (switch or potentiometer)
- Alarm contact for operation monitoring
- Remote on/off



Starting at  
**\$129.00**  
(PSB24-BFM20S)

Buffer Module Feature Comparison							
Series	Price	Buffer time	Case	Mount	Hazardous Location Rated	Protection Type	Output Voltage/ Amp Rating
PSB	\$129.00	250 msec hold-up at 20A or 5 sec at 1A	Metal	DIN Rail	✓	Overvoltage Overcurrent	24 VDC / 20A
PSM	\$261.00	200 msec hold-up at 25A or 4 seconds at 1.2A	Metal	DIN Rail	✗	✗	24 VDC / 25A

Redundancy Modules

Redundancy modules are used with two power supplies in parallel to create a redundant supply and prevent costly downtime due to power supply failure. Even if one power supply fails or becomes disconnected, the second power supply will supply the full current to the load. The redundancy module also decouples the outputs of the two connected power supplies so that in case of failure, one power supply cannot overload the other.

RHINO PSB Series

RHINO PSB series redundancy modules offer overload protection and a wide 22-60 VDC input and output voltage range at a low cost. They feature rugged aluminum housings, conformal coated circuit boards, and are approved for Class 1, Division 2 hazardous locations.

- Requires two matched 24 or 48 VDC power supplies
- Up to 40A current rating
- Input voltage OK LED and relay alarm indication
- Corrosion resistant aluminum housing



Starting at  
**\$41.00**  
(PSB60-REM20S)

RHINO PSP Series

The RHINO PSP24-REM240S redundancy module offers a rugged thermoplastic housing and supports a wide range of power supplies while delivering a dependable 8A output. It accepts two independent power inputs and automatically switches to the backup source in case of a primary power failure.

- Requires two matched 5, 12, or 24 VDC power supplies
- 8A current rating
- Output ON LED indication

Priced at  
**\$67.00**  
(PSP24-REM240S)



RHINO PSM Series

The PSM series redundancy module offers a rugged aluminum chassis and connects two RHINO PSM series 24 VDC power supplies to provide fully redundant output power when one of the power supplies has failed or has been disconnected. The redundancy module inputs are hot swappable for uninterrupted maintenance and can be loaded up to 15A each.

- Requires two matched 24 VDC PSM series power supplies
- Input voltage OK LED and relay alarm indication
- Remote ON/OFF function

Priced at  
**\$225.00**  
(PSM24-REM360S)



BLOCK PM Series

The BLOCK PM series redundancy module is used with two matched BLOCK power supplies to prevent costly downtime due to power supply failure. It decouples the outputs of the two connected power supplies so that, in case of failure, one power supply cannot overload the other.

- Requires two matched 10-36 VDC BLOCK power supplies
- Input voltage OK LED and relay alarm indication

Priced at  
**\$98.00**  
(PM-0624-100-0)



Redundancy Module Feature Comparison									
Series	Price	Requires	Case	Mount	Agency Approvals	Protection Type	Alarm Contact	Input Voltage	Output Voltage/ Amp Rating
PSB	Starting at \$41.00	(2) Matched 24 or 48 VDC power supplies	Metal	DIN Rail	UL Haz Loc Listed, UL Listed, CE, CSA	Overcurrent	✓	24/48 VDC	24/48 VDC / 20A or 24/48 VDC / 40A
PSP	\$67.00	(2) Matched 5, 12, or 24 VDC power supplies	Plastic	DIN Rail / Panel	UL Listed, CE	✗	✗	5/12/24 VDC	5/12/24 VDC / 8A
PSM	\$225.00	(2) PSM24 power supplies	Metal	DIN Rail	CE	✗	✓	24 VDC	24 VDC / 15A
PM	\$98.00	(2) Matched 10-36 VDC power supplies	Plastic	DIN Rail	UL Listed, CE, UKCA	✗	✓	24 VDC	10-36 VDC / 10A




# Dealing with Low-voltage Power Issues

When a power failure brings a manufacturing process down, it can cost thousands of dollars. As a result, companies turn to redundancy modules, buffer modules, and battery backup systems to protect their sensitive electronic equipment from power issues do not offer power loss protection. Redundant systems fail when the main power is lost.

## Redundancy Modules


In a critical process, a power supply failure can be a serious concern, even if the facility has stable incoming power. In this case, a wise solution would be to use a redundancy module. Redundancy modules monitor parallel power supplies and switch to the backup when a failure occurs. The main drawback to using redundancy systems is they do not offer power loss protection. Redundant systems fail when the main power is lost.

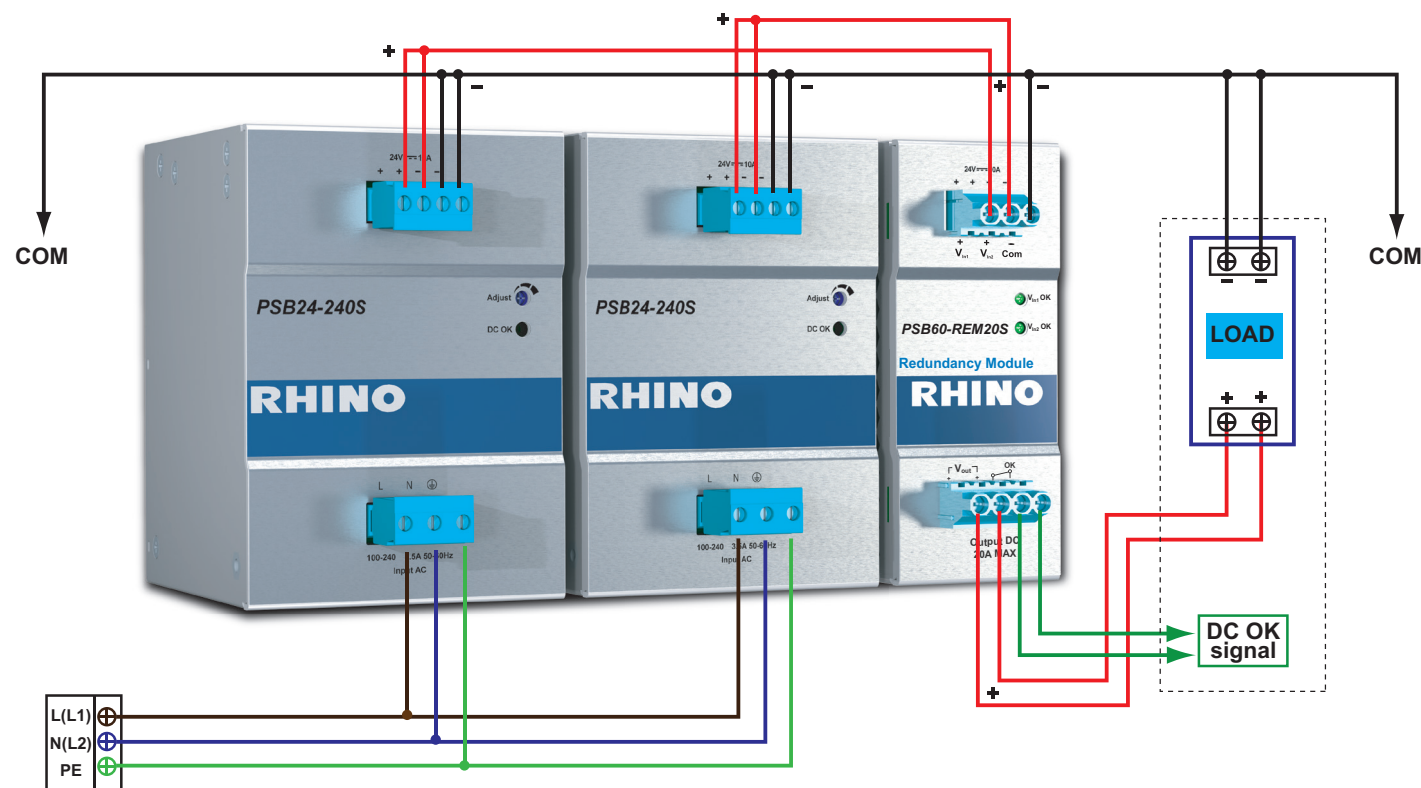

RHINO PSB60-REM series redundancy module connected to two 240 W power supplies

## Buffer Modules


A buffer module keeps a system running smoothly, even with frequent voltage drops and brownouts. It consists of large capacitive banks that release energy when a power failure occurs. The module, installed in parallel with a power supply, provides backup when a power failure occurs. It is maintenance-free because there are no moving parts, and its storage capability does not deteriorate over time.

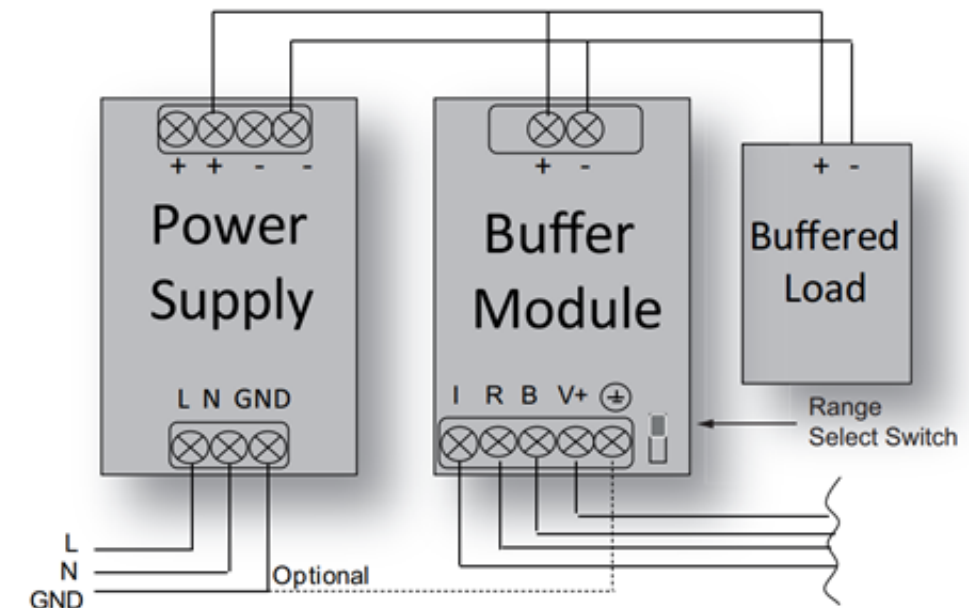

Wiring diagram for a Buffer Module connected between a power supply and load

## Battery Backup System

A battery backup system is required when there are frequent power issues, especially if the process is in a remote location. It consists of a power supply, battery backup module, batteries, and optional monitoring equipment. The power supply keeps the battery charged under normal conditions, then seamlessly switches to battery operation on power loss. This system provides the most robust protection and covers the broadest range of power faults.

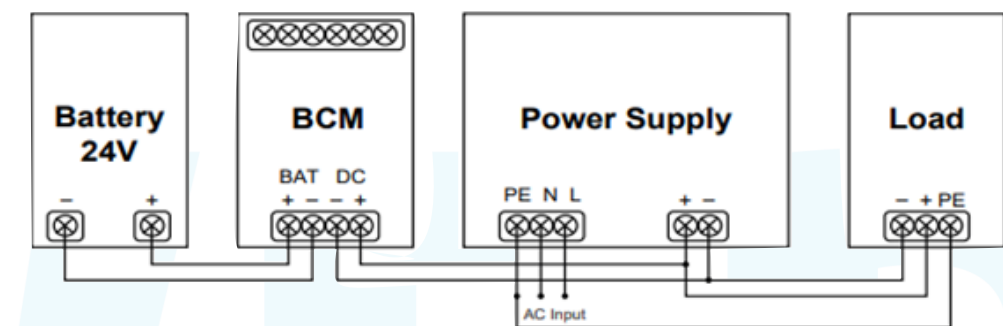

Battery Control Module wiring diagram

As power systems grow increasingly taxed, you can depend on auxiliary protection modules to keep processes running to their fullest potential.

# Electronic Circuit Breakers/Protectors

Electronic circuit breakers/protectors safeguard electrical systems from overcurrent and short-circuit faults. Using solid-state components and sophisticated algorithms, they rapidly detect and interrupt the current flow, significantly reducing the duration of

a fault and potential system damage. Compared to traditional breakers, they offer enhanced reliability, precision, and adaptability, including features like adjustable trip characteristics, remote signaling, and thermal-magnetic or electronic trip units.



## WAGO 787-3861 Series Single-Channel Electronic Circuit Breakers

WAGO 787-3861 series electronic circuit breakers feature a compact 6mm form factor to provide safe and reliable protection for 24 VDC control circuits. They offer remote monitoring and control, readily visible LED feedback, and minimize downtime due to overloads and short circuits. Built for challenging environments, they ensure system reliability through robust protection and easily interpreted diagnostics.

- Available in current ratings from 0.5 to 8 A
- Select models are NEC Class 2 compliant
- Standard models support high-capacitive loads >50,000  $\mu$ F and reduce false tripping due to inrush current
- Dual voltage outputs offer flexible connection options while reducing wiring complexity
- Manual operation via a local switch or remote input
- Bus up to 10 units together with the use of jumper bars

Starting at  
**\$32.00**  
(787-3861/050-000)

## WAGO Multi-Channel Electronic Circuit Breakers

WAGO's space-saving ECBs provide reliable protection of 24 VDC circuits. They offer outstanding features and protection against overload and short circuits. These ECBs feature high channel density to save space in the control cabinet.

- Two-, four- and eight-channel protective switches with currents adjustable from 0.5 to 10 A
- Compact 42 or 45mm frame widths (depending on model)
- NEC Class 2 3.8A fixed models available
- High switch-on capacity: > 50,000  $\mu$ F
- Remote input resets tripped channels or switches on/off any number of channels via pulse sequence
- Optional active current limitation
- Easy-to-use Push-In CAGE CLAMP terminals




Starting at  
**\$189.00**  
(787-1662-106-000)



## Modular Electronic Circuit Protectors

E-T-A REX protectors safeguard electrical circuits from overcurrent, short circuit, and other faults. As a modular system, individual protection modules can be combined to meet specific circuit protection requirements, allowing for flexible configurations and easy installation.

Components  
Starting at  
**\$11.00**  
(EM-T00-000-GND-40A)

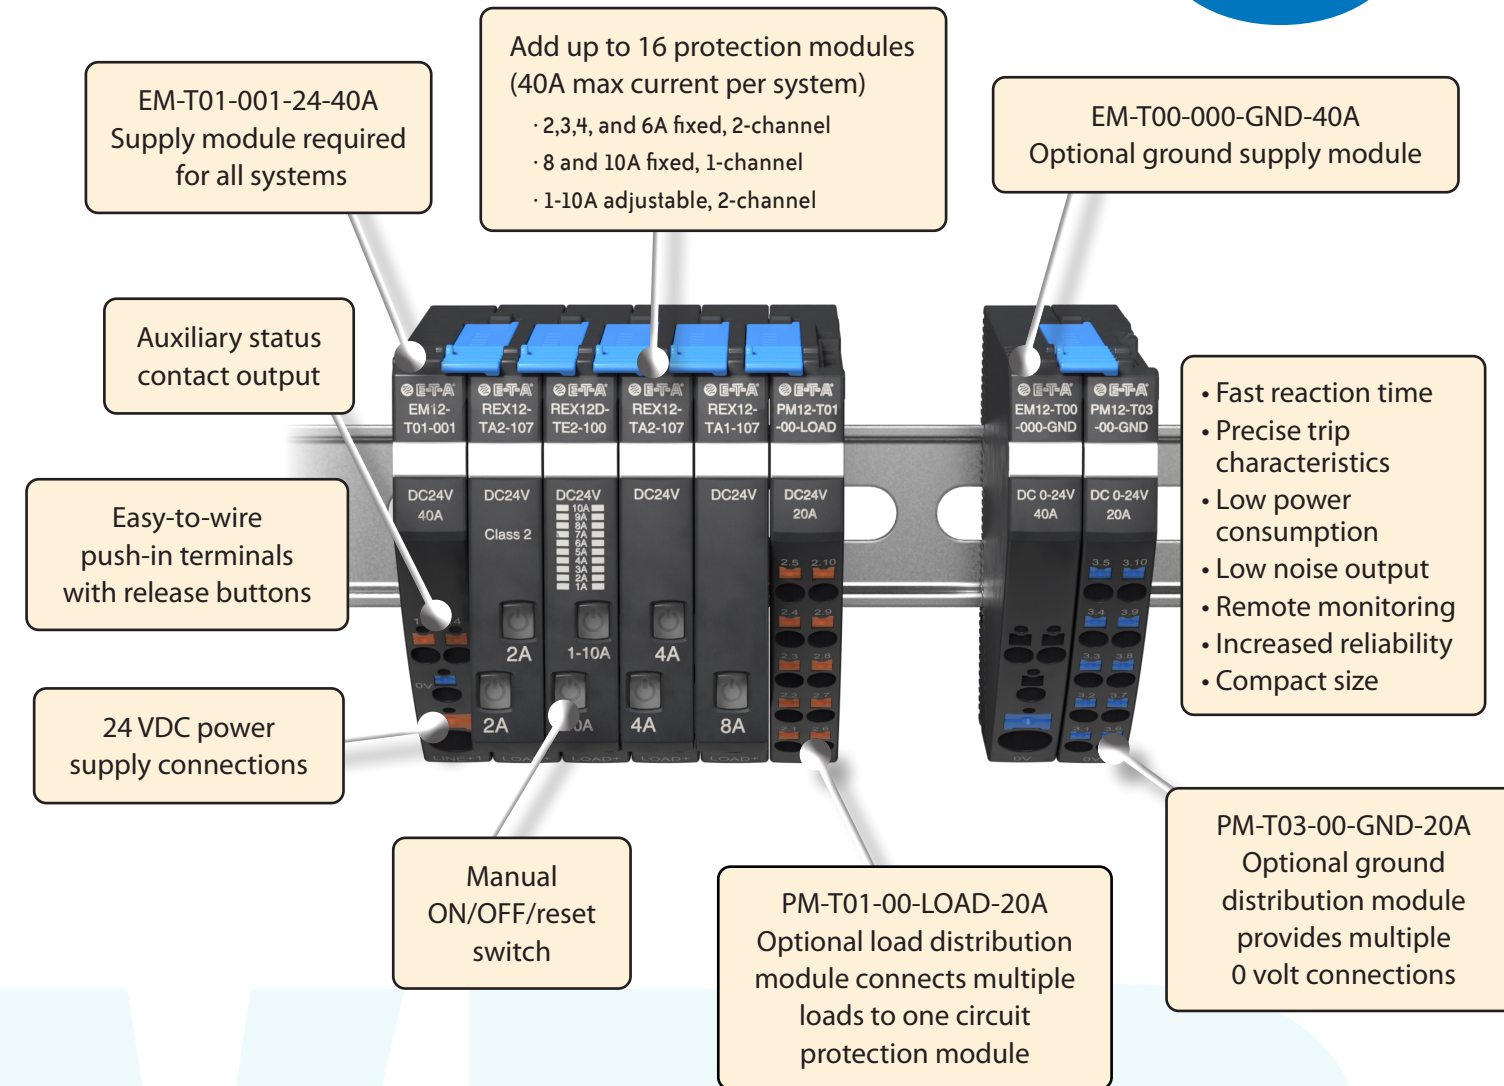



# Electronic Circuit Breakers/Protectors (cont.)

## Gladiator® GECP Series Circuit Protectors

Gladiator GECP series circuit protectors can be customized to fit any application, featuring an adjustable trip current range, adjustable trip characteristics, and LED signaling with output alarms for real-time status monitoring. The GECP series is compact, lightweight, and available at a very low cost per channel.

- Protection modules are standalone or can be integrated into a modular system using supply and ground modules
- Adjustable module offers adjustable trip current range (1-10A) and trip characteristics
- 10 to 30 VDC operating voltage
- LED signaling at 90% overload provides early warning of potential overloads, allowing corrective action to be taken before a fault occurs
- Remote set/reset for applications where access to the breaker is difficult or dangerous
- Bus up to 8 modules together using jumper bars



Starting at  
**\$29.50**  
(GECP-1CH-1A)

GECP-24-SS  
Optional 24 VDC supply set (requires busbar)

Switches allow quick ON/OFF toggling of power from the busbar

White comb jumper for 0V supply terminals

Easy-to-wire push-in terminals with release buttons

Remote set/reset functions

Optional busbars provide supply power to 4 or 8 protection modules

GECP-0V-TERM  
Optional ground supply modules

Protection modules are standalone or can be integrated into a modular system using supply and ground modules

Protection Modules

- 1,2,4,6 and 8A fixed, 1-channel
- 1-10A adjustable, 1-channel

Bottom view of load, remote set/reset, and status output (red jumper) terminals

# DIN Rail Receptacles



Starting at  
**\$36.00**  
(FA-REC3)

## AUTOMATIONDIRECT.com DIN Rail Receptacles

AutomationDirect 1-phase DIN rail receptacles provide convenient, temporary power connections for devices such as laptops and test equipment. Enclosed dual-receptacle models feature rugged nylon housings and are offered in standard or GFCI styles, while the FA-REC3 is an inexpensive open device with three receptacles.

- 125 VAC, 15A rated
- DIN rail or panel mounting options
- UL 508 listed
- Nylon housing

## Gladiator® GR Series Quad Receptacles

Gladiator GR series DIN rail or panel-mounted quad receptacles are convenient outlets for powering laptop computers and test equipment. The GR-REC4 consists of two NEMA 5-15R duplex receptacles, while the GR-REC4-GFCI includes one GFCI duplex style receptacle and one standard NEMA 5-15R duplex receptacle, which is also protected by the GFCI circuit.

- 125 VAC, 15A rated (combined current capacity of all four outlets)
- Accepts 14 to 12 AWG [2.5 - 4.0 mm<sup>2</sup>] wire sizes
- DIN rail or panel mounting
- UL 508 listed
- Rugged polyamide housing material



Starting at  
**\$48.00**  
(GR-REC4)