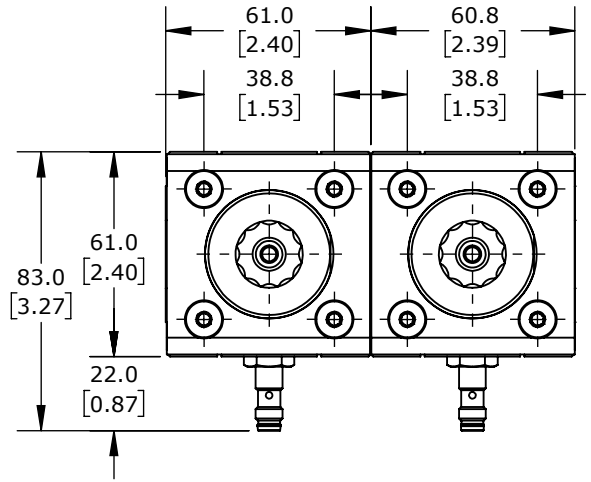
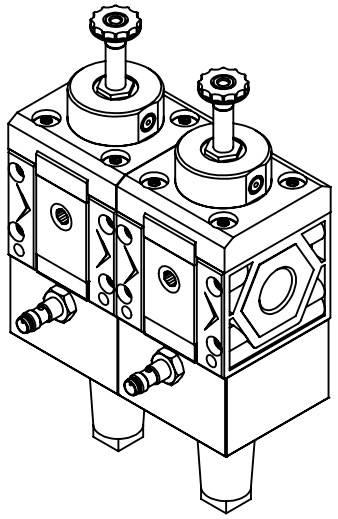
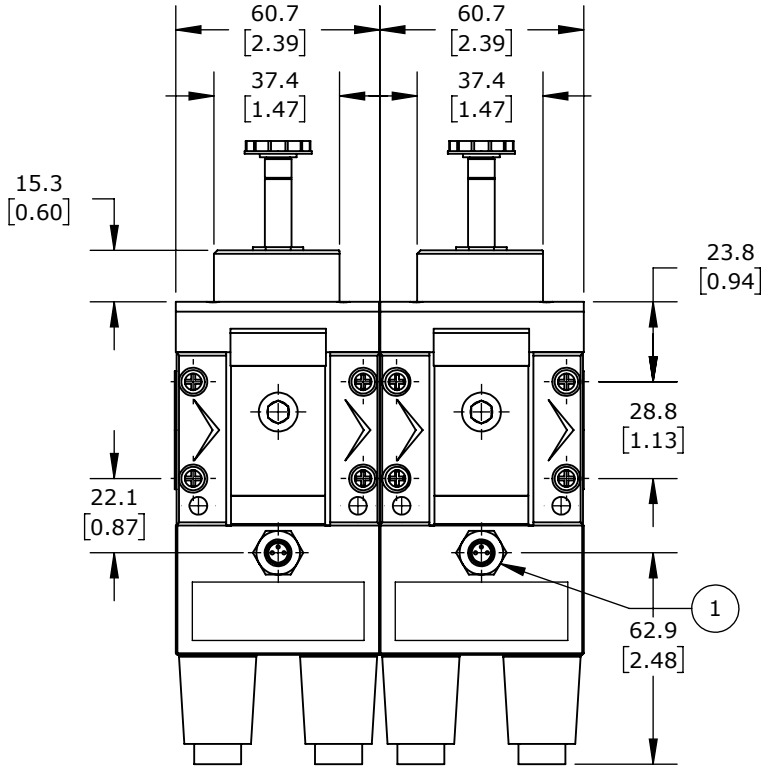


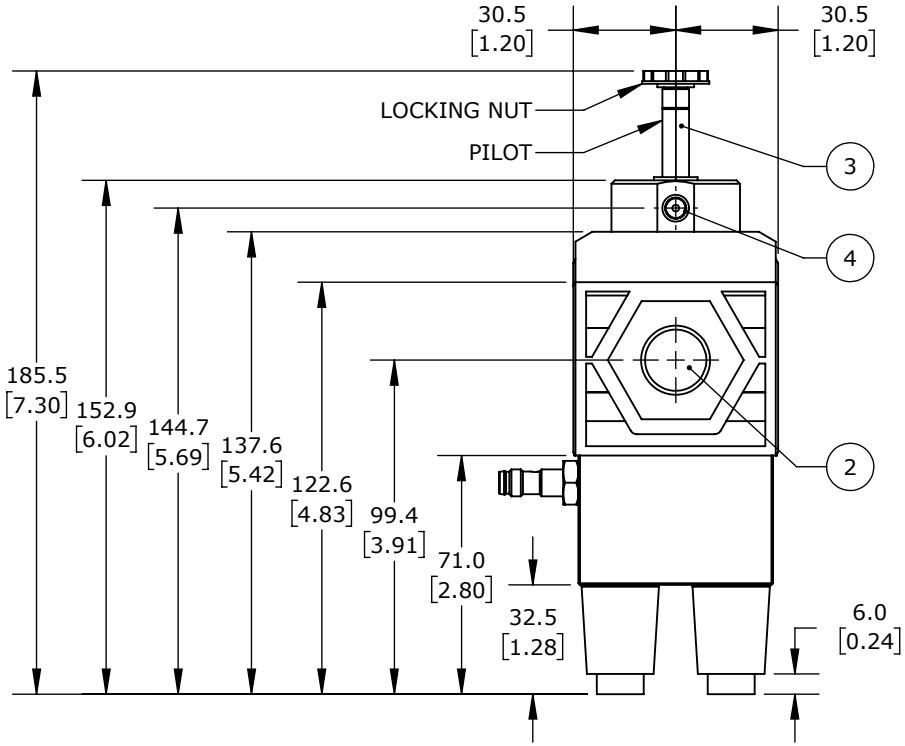

INSTALLATION INSTRUCTIONS:

1.) 3-PIN M8 CONNECTOR FOR SENSOR FEEDBACK
2.) CONNECT THE AIR TUBES TO THE VALVE USING PNEUMATIC FITTINGS
3.) MOUNT THE COIL ON THE PILOT AND TIGHTEN THE LOCKING NUT (MAX 1 Nm)
4.) MONOSTABLE MANUAL OPERATOR TO BE USED FOR ANY TESTS DURING INSTALLATION



ISOMETRIC VIEW




| METAL WORK SAFETY RATED PNEUMATIC VALVES | 5U24W724 | AutomationDirect.com 1-800-633-0405 |
|---|---|---|

| 3rd ANGLE | NOT TO SCALE | PART DIMENSIONS MAY DIFFER SLIGHTLY DUE TO MANUFACTURER'S VARIANCES | METRIC UNITS USED FOR PART DESIGN | UNLESS OTHERWISE SPECIFIED UNITS ARE: **mm** **[inch]** | MODEL REV. -- | DRAWING DATE 9/18/2026 | SHEET 1 OF 1 |
|---|---|---|---|---|---|---|---|