



WIEGMANN

FREEBURG, ILLINOIS, USA

HUBBELL ELECTRICAL PRODUCTS
A Division of HUBBELL
INCORPORATED (Delaware)
501 West Apple
Freeburg, IL 62243 USA
For Customer Service: 618-539-3193

DWG. NO. HWIHF33081

P.N. HFW33081

DATE 6-10-15

AFFECTED P.N. LARGE FREE STANDING & FLOOR MOUNTED ENCLOSURES


INSTALLATION, OPERATION, & MAINTENANCE DATA SHEET

CAUTION: Before installing, make sure you are compliant with area classifications - as failure to do so may result in bodily injury, death and property damage. Do not attempt installation until you are familiar with the following procedures. All installation must comply with the applicable Electrical Code(s). Make sure that all supply circuits are de-energized before starting installation or maintenance. Verify that the installation is grounded. Failure to ground will create electrical shock hazards, which can cause serious injury and or death.


Important: Please read these instructions carefully before installing or maintaining this equipment. Safe electrical practices should be followed at all times and this data should be used as a guide only. Maintain the environmental integrity of this enclosure by closing all openings w/UL listed or recognized components that have the same environmental rating as the enclosure.

TOOLS NEEDED

SCREWDRIVER



ASSEMBLED VIEW

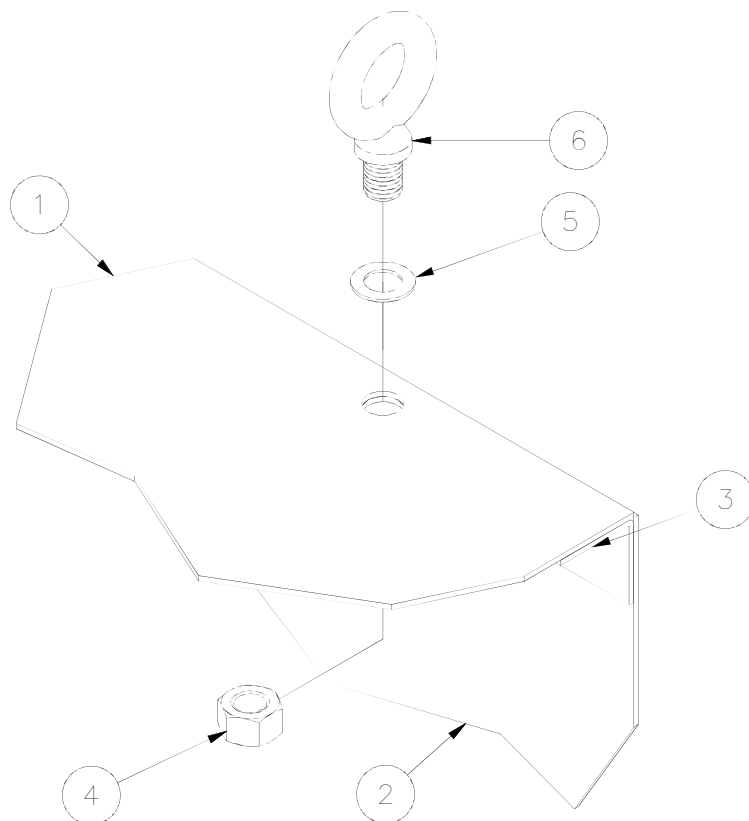

EXPLODED VIEW

ITEM	QTY	DESCRIPTION
1	1	TOP ENDWALL OF ENCLOSURE
2	1	SIDE ENDWALL OF ENCLOSURE
3	1	EYE BOLT ANGLE (WELDED IN)
4	1	HEX NUT 3/4-10
5	1	EYE,BOLT GASKET
6	1	EYE BOLT, 3/4"

NOTE

3 & 4 ARE FACTORY WELDED TO UNDERSIDE OF ENCLOSURE.

INSTRUCTIONS

1. INSTALL (1) RUBBER GASKET ONTO THE THREADED PORTION OF (1) EYE BOLT.
2. SLIDE THE GASKET UP THE THREADS SO THAT IT MATES WITH THE FLANGED SURFACE OF THE EYE BOLT
3. SCREW THE EYE BOLT INTO THE THREADS PROVIDED. IF THE EYE BOLT IS DIFFICULT TO TURN, INSERT THE SHAFT OF A SCREWDRIVER INTO THE EYE AND USE IT TO TIGHTEN THE EYE BOLT UNTIL THE FLANGE AND GASKET MAKE CONTACT WITH THE TOP OF THE ENCLOSURE.
4. APPLY AN ADDITIONAL 1/4 TO 1/2 TURN TO ENSURE THE EYE BOLT IS SECURE.

IMPORTANT

OVER TIGHTENING CAN CAUSE THE GASKET TO TEAR AND/OR FAIL.