



Background suppression sensor - PNP
LHR-C23PA-PMK-603


For use in NFPA 79 Applications only



Sensing range
typ. max. **10...300 mm**

Housing **20 x 30 (C23)**

Operation range **15...250 mm**

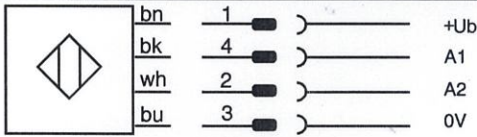

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: Light-on/IO-Link
 A2: Dark-on

For use in class 2 circuits



CONTRINEX USA
 480 Wrangler Dr 100, Coppell TX 75019 US
 Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Background suppression sensor - PNP
LHR-C23PA-PMK-603


For use in NFPA 79 Applications only



Sensing range
typ. max. **10...300 mm**

Housing **20 x 30 (C23)**

Operation range **15...250 mm**

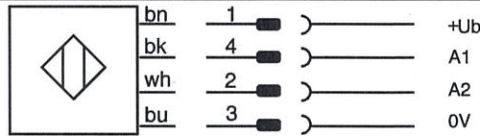

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: Light-on/IO-Link
 A2: Dark-on

For use in class 2 circuits



CONTRINEX USA
 480 Wrangler Dr 100, Coppell TX 75019 US
 Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Background suppression sensor - PNP
LHR-C23PA-PMK-603


For use in NFPA 79 Applications only



Sensing range
typ. max. **10...300 mm**

Housing **20 x 30 (C23)**

Operation range **15...250 mm**

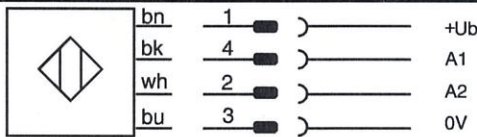

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: Light-on/IO-Link
 A2: Dark-on

For use in class 2 circuits



CONTRINEX USA
 480 Wrangler Dr 100, Coppell TX 75019 US
 Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Background suppression sensor - PNP
LHR-C23PA-PMK-603


For use in NFPA 79 Applications only



Sensing range
typ. max. **10...300 mm**

Housing **20 x 30 (C23)**

Operation range **15...250 mm**

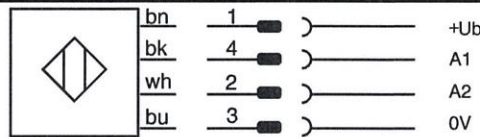

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: Light-on/IO-Link
 A2: Dark-on

For use in class 2 circuits



CONTRINEX USA
 480 Wrangler Dr 100, Coppell TX 75019 US
 Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.