



Background suppression sensor - PNP

LHR-M18PA-TMS-603


IO-Link

For use in NFPA 79 Applications only

Sensing range typ. max. 10...250 mm

Housing M18

Operation range 15...210 mm

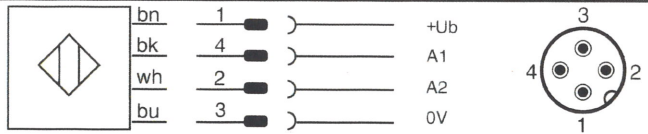

U_B 10...30 VDC
IA ≤ 200 mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



ECOLAB



CONTRINEX USA

480 Wrangler Dr 100, Coppell TX 75019 US

Internet: www.contrinex.com



620-400-222

Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Background suppression sensor - PNP

LHR-M18PA-TMS-603


IO-Link

For use in NFPA 79 Applications only

Sensing range typ. max. 10...250 mm

Housing M18

Operation range 15...210 mm

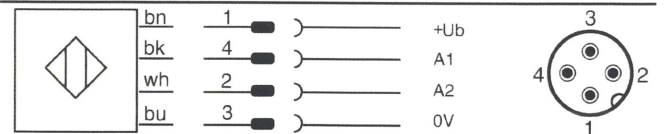

U_B 10...30 VDC
IA ≤ 200 mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



ECOLAB



CONTRINEX USA

480 Wrangler Dr 100, Coppell TX 75019 US

Internet: www.contrinex.com



620-400-222

Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Background suppression sensor - PNP

LHR-M18PA-TMS-603


IO-Link

For use in NFPA 79 Applications only

Sensing range typ. max. 10...250 mm

Housing M18

Operation range 15...210 mm

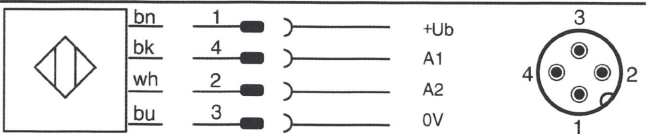

U_B 10...30 VDC
IA ≤ 200 mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



ECOLAB



CONTRINEX USA

480 Wrangler Dr 100, Coppell TX 75019 US

Internet: www.contrinex.com



620-400-222

Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Background suppression sensor - PNP

LHR-M18PA-TMS-603


IO-Link

For use in NFPA 79 Applications only

Sensing range typ. max. 10...250 mm

Housing M18

Operation range 15...210 mm

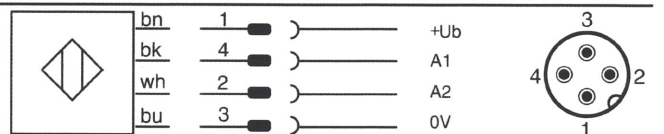

U_B 10...30 VDC
IA ≤ 200 mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



ECOLAB



CONTRINEX USA

480 Wrangler Dr 100, Coppell TX 75019 US

Internet: www.contrinex.com



620-400-222

Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.