



Through-beam sensor - PNP
LLR-M18PA-NMK-603




For use in NFPA 79 Applications only

Sensing range
typ. max. **0...30000 mm**

Housing **M18**

Operation range **0...25000 mm**



U_B 10...30 VDC
 $I_A \leq 200$ mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



ECOLAB



CONTRINEX USA

480 Wrangler Dr 100, Coppell TX 75019 US

Internet: www.contrinex.com



620-400-229

Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Through-beam sensor - PNP
LLR-M18PA-NMK-603




For use in NFPA 79 Applications only

Sensing range
typ. max. **0...30000 mm**

Housing **M18**

Operation range **0...25000 mm**



U_B 10...30 VDC
 $I_A \leq 200$ mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



ECOLAB



CONTRINEX USA

480 Wrangler Dr 100, Coppell TX 75019 US

Internet: www.contrinex.com



620-400-229

Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Through-beam sensor - PNP
LLR-M18PA-NMK-603




For use in NFPA 79 Applications only

Sensing range
typ. max. **0...30000 mm**

Housing **M18**

Operation range **0...25000 mm**



U_B 10...30 VDC
 $I_A \leq 200$ mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



ECOLAB



CONTRINEX USA

480 Wrangler Dr 100, Coppell TX 75019 US

Internet: www.contrinex.com



620-400-229

Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Through-beam sensor - PNP
LLR-M18PA-NMK-603




For use in NFPA 79 Applications only

Sensing range
typ. max. **0...30000 mm**

Housing **M18**

Operation range **0...25000 mm**

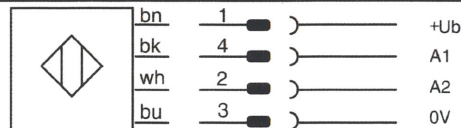

U_B 10...30 VDC
 $I_A \leq 200$ mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



ECOLAB



CONTRINEX USA

480 Wrangler Dr 100, Coppell TX 75019 US

Internet: www.contrinex.com



620-400-229

Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.