




Diffuse sensor - NPN
LTR-M18PA-PMS-101

For use in NFPA 79 Applications only

Sensing range
typ. max. **3...1200 mm**

Housing **M18**

Operation range **5...1000 mm**



U_B 10...30 VDC
I_A ≤ 200 mA

A1: Light-on
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.




Diffuse sensor - NPN
LTR-M18PA-PMS-101

For use in NFPA 79 Applications only

Sensing range
typ. max. **3...1200 mm**

Housing **M18**

Operation range **5...1000 mm**



U_B 10...30 VDC
I_A ≤ 200 mA

A1: Light-on
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.




Diffuse sensor - NPN
LTR-M18PA-PMS-101

For use in NFPA 79 Applications only

Sensing range
typ. max. **3...1200 mm**

Housing **M18**

Operation range **5...1000 mm**



U_B 10...30 VDC
I_A ≤ 200 mA

A1: Light-on
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.




Diffuse sensor - NPN
LTR-M18PA-PMS-101

For use in NFPA 79 Applications only

Sensing range
typ. max. **3...1200 mm**

Housing **M18**

Operation range **5...1000 mm**

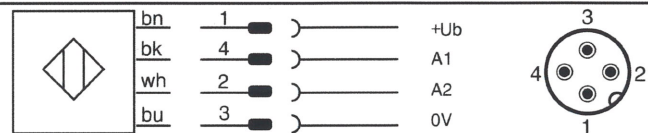

U_B 10...30 VDC
I_A ≤ 200 mA

A1: Light-on
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÛLURE



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.