




Transparent object sensor - PNP
TRR-C23PA-PMS-603

PROUDLY
MADE IN USA

For use in NFPA 79 Applications only IO-Link

Sensing range typ. max. **10...5000 mm**
(on LXR-0000-084)
Operation range **20...4200 mm**
(on LXR-0000-084)

Housing **20 x 30 (C23)**

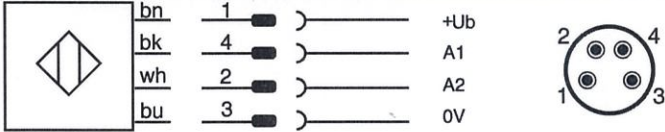

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

620-400-380

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.




Transparent object sensor - PNP
TRR-C23PA-PMS-603

PROUDLY
MADE IN USA

For use in NFPA 79 Applications only IO-Link

Sensing range typ. max. **10...5000 mm**
(on LXR-0000-084)
Operation range **20...4200 mm**
(on LXR-0000-084)

Housing **20 x 30 (C23)**

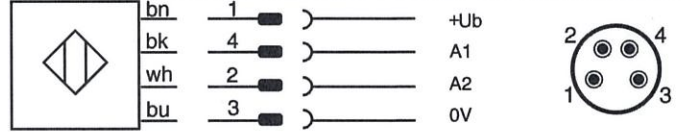

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

620-400-380

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.




Transparent object sensor - PNP
TRR-C23PA-PMS-603

PROUDLY
MADE IN USA

For use in NFPA 79 Applications only IO-Link

Sensing range typ. max. **10...5000 mm**
(on LXR-0000-084)
Operation range **20...4200 mm**
(on LXR-0000-084)

Housing **20 x 30 (C23)**

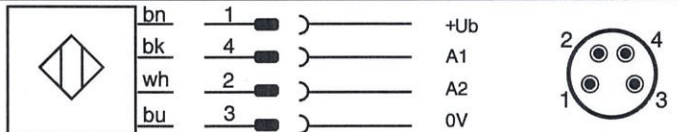

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com




Transparent object sensor - PNP
TRR-C23PA-PMS-603

PROUDLY
MADE IN USA

For use in NFPA 79 Applications only IO-Link

Sensing range typ. max. **10...5000 mm**
(on LXR-0000-084)
Operation range **20...4200 mm**
(on LXR-0000-084)

Housing **20 x 30 (C23)**

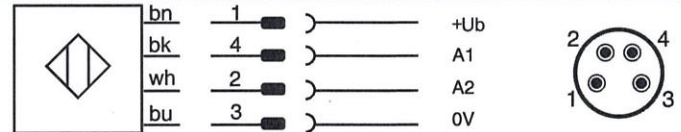

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: Light-on/IO-Link
A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com