


**Transparent object sensor - PNP**  
**TRR-C23PA-TMK-603**

For use in NFPA 79 Applications only **IO-Link**

Sensing range typ. max. **10...5000 mm**  
(on LXR-0000-084)  
Operation range **20...4200 mm**  
(on LXR-0000-084)

Housing **20 x 30 (C23)**



$U_b$  10...30 VDC  
 $I_A \leq 100$  mA  
A1: Light-on/IO-Link  
A2: Dark-on  
For use in class 2 circuits




**Transparent object sensor - PNP**  
**TRR-C23PA-TMK-603**

For use in NFPA 79 Applications only **IO-Link**

Sensing range typ. max. **10...5000 mm**  
(on LXR-0000-084)  
Operation range **20...4200 mm**  
(on LXR-0000-084)

Housing **20 x 30 (C23)**

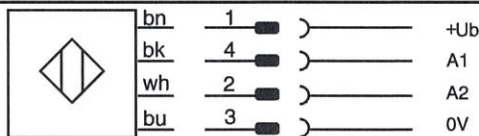

$U_b$  10...30 VDC  
 $I_A \leq 100$  mA  
A1: Light-on/IO-Link  
A2: Dark-on  
For use in class 2 circuits



**CONTRINEX USA**  
480 Wrangler Dr 100, Coppell TX 75019 US  
Internet: [www.contrinex.com](http://www.contrinex.com)



Made by Contrinex USA



**CONTRINEX USA**  
480 Wrangler Dr 100, Coppell TX 75019 US  
Internet: [www.contrinex.com](http://www.contrinex.com)



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.




**Transparent object sensor - PNP**  
**TRR-C23PA-TMK-603**


For use in NFPA 79 Applications only **IO-Link**

Sensing range typ. max. **10...5000 mm**  
(on LXR-0000-084)  
Operation range **20...4200 mm**  
(on LXR-0000-084)

Housing **20 x 30 (C23)**

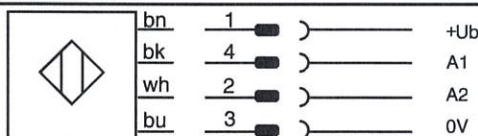

$U_b$  10...30 VDC  
 $I_A \leq 100$  mA  
A1: Light-on/IO-Link  
A2: Dark-on  
For use in class 2 circuits




**Transparent object sensor - PNP**  
**TRR-C23PA-TMK-603**

For use in NFPA 79 Applications only **IO-Link**

Sensing range typ. max. **10...5000 mm**  
(on LXR-0000-084)  
Operation range **20...4200 mm**  
(on LXR-0000-084)

Housing **20 x 30 (C23)**

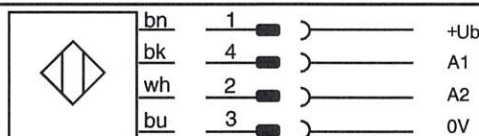

$U_b$  10...30 VDC  
 $I_A \leq 100$  mA  
A1: Light-on/IO-Link  
A2: Dark-on  
For use in class 2 circuits



**CONTRINEX USA**  
480 Wrangler Dr 100, Coppell TX 75019 US  
Internet: [www.contrinex.com](http://www.contrinex.com)



Made by Contrinex USA



**CONTRINEX USA**  
480 Wrangler Dr 100, Coppell TX 75019 US  
Internet: [www.contrinex.com](http://www.contrinex.com)



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.