




Transparent object sensor - NPN
TRU-C23PA-TMK-101

For use in NFPA 79 Applications only

Sensing range typ. max. **0...1200 mm**
(on LXU-0000-084)
Housing **20 x 30 (C23)**

Operation range **0...1000 mm**
(on LXU-0000-084)

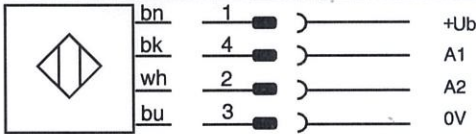

U_b 15...30 VDC
 $I_A \leq 100$ mA

A1: Light-on
A2: Dark-on

For use in class 2 circuits



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

620-400-386

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.




Transparent object sensor - NPN
TRU-C23PA-TMK-101

For use in NFPA 79 Applications only

Sensing range typ. max. **0...1200 mm**
(on LXU-0000-084)
Housing **20 x 30 (C23)**

Operation range **0...1000 mm**
(on LXU-0000-084)

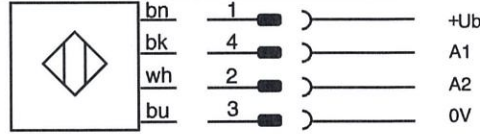

U_b 15...30 VDC
 $I_A \leq 100$ mA

A1: Light-on
A2: Dark-on

For use in class 2 circuits



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

620-400-386

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.




Transparent object sensor - NPN
TRU-C23PA-TMK-101

For use in NFPA 79 Applications only

Sensing range typ. max. **0...1200 mm**
(on LXU-0000-084)
Housing **20 x 30 (C23)**

Operation range **0...1000 mm**
(on LXU-0000-084)

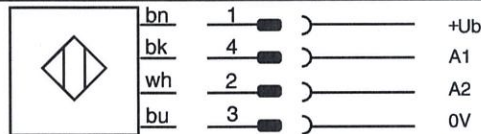

U_b 15...30 VDC
 $I_A \leq 100$ mA

A1: Light-on
A2: Dark-on

For use in class 2 circuits



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com




Transparent object sensor - NPN
TRU-C23PA-TMK-101

For use in NFPA 79 Applications only

Sensing range typ. max. **0...1200 mm**
(on LXU-0000-084)
Housing **20 x 30 (C23)**

Operation range **0...1000 mm**
(on LXU-0000-084)

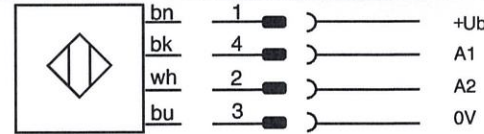

U_b 15...30 VDC
 $I_A \leq 100$ mA

A1: Light-on
A2: Dark-on

For use in class 2 circuits



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com