

5251




Straight Blade Single Flush Receptacle.

Product Specifications

Product Type	Receptacle.
Device Type	Single Flush.
Device Grade	Heavy Duty.
Amperage	15A
Voltage	125V
Poles and Wires	2 Pole, 3 Wire.
Wiring Style	Side Wired.
Color	Brown
NEMA #	5-15R
Face	Nylon.
Base	Nylon.
Line Contacts	High Performance Brass.
Clamp Nut	Steel.
Mounting Yoke	Steel, Nickel and Brass Plated .050" (1.3).
Terminal Screws	Combination Brass #10-32.
Grounding Screw.	Combination Brass (Green) #8-32.
Grounding Clamp Nut	Brass.
Circuit ID	Hot Stamp.

Auto Ground Clip	High Performance Brass.
Mounting Screws	Combination Steel Zinc-Plated.
Dielectric Voltage	Withstands 2000V per UL498.
Maximum Working Voltage	250V AC or DC
Current Interrupting	Certified for current interrupting at full rated current.
Temperature Rise	Less than 30 deg C temperature rise at full rated current after 50 cycles overload at 150% rated current for either AC or DC applications per UL498.
Terminal Identification	Brass-Hot; Green-Grounding; Silver-Neutral.
Terminal Accommodation	#14-#10 AWG Copper Conductor Only.
Product Identification	Ratings are a permanent part of the device.
Flammability	UL 94 V2.
Operating Temperature	Maximum Continuous 60 deg C, Minimum -40 deg C (w/o impact).
UL Standard	UL Listed, File #E2258- Guide #RTRT.
CSA Standard	Certified to CSA Standard C22.2 No. 42M1984 (General Use Receptacles).
UL Listing	UL Listed, File #E2258- Guide #RTRT.
Federal Specification	Federal Specification WC596 (where applicable).
Complies with:	NEMA Standards WD-1, WD-6.
Overseas Approval	NOM, CE.
Catalog Page	Click here for catalog page

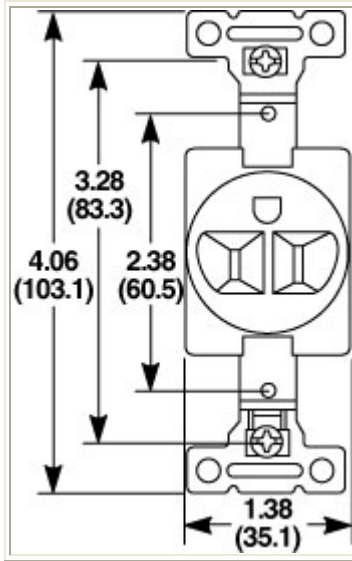

BRYANT®