



SCHMERSAL IEC Limit Switches

Plastic Body Limit Switches 236 Series

Features

- 16 models available
- 90-degree adjustable head, levers are adjustable to any angle on the operating shaft
- Double-insulated thermoplastic enclosure
- Fully assembled out of box
- Snap action with constant contact pressure up to switching point
- M20 x 1.5 to 1/2" NPT conduit adapter
- Contact patterns similar to those of leading competitors

Thermoplastic Body Limit Switches 236 Series								
Part Number	Price	Actuator Type	Snap Action Contacts	Travel to Operate Contacts	Total Travel	Actuating Force (min)	Switch Travel Diagram	Drawing Link *
<u>ZS-236-02Z</u>	\$,;-4t[:	Plastic plunger	(2) N.C.	0.07in [1.8mm]	0.24in [6mm]	79.66 lb-in [9 N•m]	Diagram 1	<u>PDF</u>
<u>ZS-236-11Z</u>	\$,;4t[n:		(1) N.O./(1) N.C.	0.1in [2.5mm]			Diagram 2	<u>PDF</u>
<u>ZR-236-02Z</u>	\$,;4t[o:	Metal plunger with plastic roller	(2) N.C.	0.07in [1.8mm]			Diagram 1	<u>PDF</u>
<u>ZR-236-11Z</u>	\$,;4t[p:		(1) N.O./(1) N.C.	0.1in [2.5mm]			Diagram 2	<u>PDF</u>
<u>Z4S-236-02Z</u>	\$,;4t[s:	Metal plunger with fixing nuts	(2) N.C.	0.07 in [1.8 mm]			Diagram 1	<u>PDF</u>
<u>Z4S-236-11Z</u>	\$,;4t[t:		(1) N.O./(1) N.C.	0.1in [2.5mm]			Diagram 2	<u>PDF</u>
<u>Z4R-236-02Z</u>	\$,;4t[u:	Metal plunger with plastic roller with fixing nuts	(2) N.C.	0.07in [1.8mm]			Diagram 1	<u>PDF</u>
<u>Z4R-236-11Z</u>	\$,;4t[v:		(1) N.O./(1) N.C.	0.1in [2.5mm]			Diagram 2	<u>PDF</u>
<u>ZV12H-236-02Z</u>	\$,;4t[x:	Side rotary lever with plastic roller	(2) N.C.	22°	70°	1.33 lb-in [0.15 N•m]	Diagram 3	<u>PDF</u>
<u>ZV12H-236-11Z</u>	\$,;4t[z:		(1) N.O./(1) N.C.				Diagram 3	<u>PDF</u>
<u>ZK-236-02Z</u>	\$,;4t[:	One-way horizontal lever with plastic roller	(2) N.C.	0.1in [2.5mm]	0.37in [9.3mm]	79.66 lb-in [9 N•m]	Diagram 5	<u>PDF</u>
<u>ZK-236-11Z</u>	\$,;4t[:		(1) N.O./(1) N.C.	0.14in [3.6mm]			Diagram 6	<u>PDF</u>
<u>ZV7H-236-02Z-2138</u>	\$,;4t[:	Side rotary adjustable lever with plastic roller	(2) N.C.	22°	70°	1.33 lb-in [0.15 N•m]	Diagram 3	<u>PDF</u>
<u>ZV7H-236-11Z-2138</u>	\$,;4t[#:		(1) N.O./(1) N.C.	30°			Diagram 4	<u>PDF</u>
<u>ZV10H-236-02Z</u>	\$,;4t[?:	Side rotary adjustable 6mm plastic rod	(2) N.C.	22°	70°		Diagram 7	<u>PDF</u>
<u>ZV10H-236-11Z</u>	\$,;4t[:		(1) N.O./(1) N.C.	30°			Diagram 8	<u>PDF</u>

* Weights are included on the drawing



[ZS-236-02Z](#)



[ZR-236-02Z](#)



[Z4S-236-02Z](#)



[Z4R-236-02Z](#)



[ZV12H-236-02Z](#)



[ZK-236-02Z](#)



[ZV7H-236-02Z-2138](#)

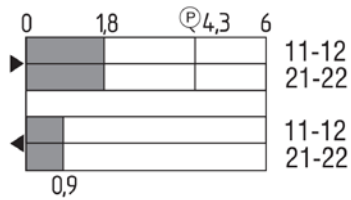
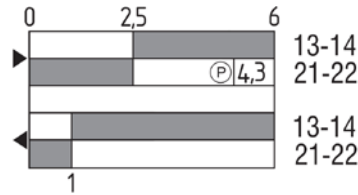
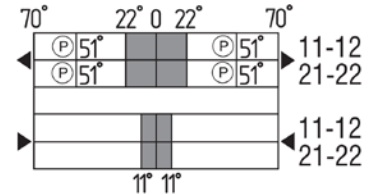
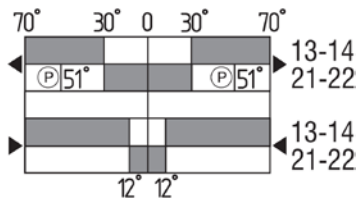
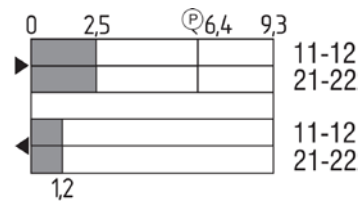
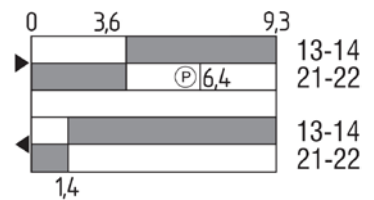
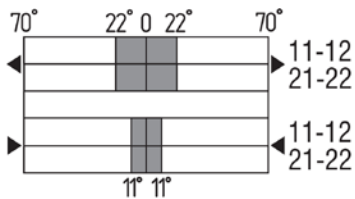
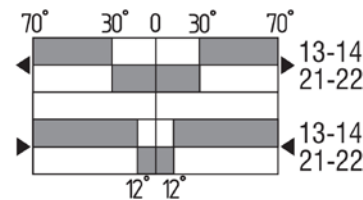


[ZV10H-236-02Z](#)

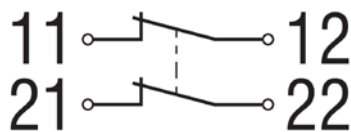
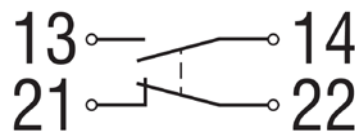

SCHMERSAL

235/236 Series Travel Diagrams

Switch Travel Diagrams


Diagram 1

Diagram 2

Diagram 3

Diagram 4

Diagram 5

Diagram 6

Diagram 7

Diagram 8

Contact Travel Diagrams


Diagram 1

Diagram 2



SCHMERSAL 235/236 Series Specifications

235/236 Series Specifications		
Series	235	236
Environmental		
Degree of Protection	IP67	
Temperature Range	-30 to 80°C [-22 to 176°F]	
Mechanical Ratings		
Body Footprint (Without Actuator Head)	30 x 30 x 63.5mm	30 x 30 x 58.5mm
Mechanical Life	20 Million Operations	
Conduit Entrance	M20 x 1.5, each unit comes with a 1/2 in NPT adapter	
Enclosure Material	Die-cast zinc alloy	Plastic, Glass-fiber reinforced thermoplastic, self-extinguishing
Contact Blocks Rating		
Rated Impulse Withstand Voltage	6 kV	
Electrical Ratings	AC	AC-15 - 4A @ 230VAC Continuous: 10A @ 230VAC Required rated short-circuit current to EN60947-5-1 : 1,000A
	DC	DC-13 - 1A @ 24VDC
Maximum Switching Frequency	5,000 operations per hour, Switchover time: Max 5.5 ms, Bounce Duration: Max 3ms	
Contact Type	Change-over contact with double break, type 1 N.C. or 2 N.C. contacts, with galvanically separated contact bridges: snap-action, N.C. contacts with positive break	
Wiring Connections	AWG #14 through AWG #18 Wire	
Torque Requirements	Wiring Terminals: 7.1 in-lb [0.8 N•m]	
Safety Data		
General	02Z Series - Safety Function, Yes; Number of Safety Contacts: 2 11Z Series - Safety Function, Yes; Number of Safety Contacts 1, Number of Aux Contacts 1	
Safety Appraisal	Standards: ISO 13849-1, Mission Time 20 Year(s) Safety Outputs: B10d Normally-closed contact (N.C.), 20,000,000 Operations	
Agency Approvals*	cULus E57648 all versions. All units are CE and Reach Compliant Standards: IEC 60947-5-1 : 2010, ISO 13849-1, BG-GS-ET-15, ISO 13849-1	

*To obtain the most current agency approval information, see the Agency Compliance & Certifications Checklist section on the specific part number's web page.