

# IDEM Inch Hinge Safety Switches

## Inch Hinge Series Housing

- Shaft hinge (Idem Inch Hinge) interlock operated
- M16, M20, 1/2" NPT threaded opening or M12 connection
- 16.5 mm- 18mm mounting profile (Inch-X); 16.5 mm- 22mm mounting profile (MK-1)
- 25mm plastic, 30mm stainless steel housings

- Compact body
- Plastic and stainless steel housings
- 90 degree adjustable head
- Force guided NC contacts

See electrical specifications later in this section.

### IDEM Inch Hinge Series




IDEM Inch Hinge Safety Switches									
Part Number	Price	Body Material	Head Material	Weight (lb)	Actuator Travel / Force for Positive Opening	Contact Configuration	Shaft Size	Connection	Dimensions
<a href="#"><u>HC-1-193001</u></a>	\$1095:	Plastic	316 stainless steel	0.29	7 degrees/0.5N	2 N.C. Slow action	Solid diameter 10mm x 80mm	1 x M16	Figure 1
<a href="#"><u>HC-1-193002</u></a>	\$1096:	Plastic	316 stainless steel	0.32	7 degrees/0.5N	2 N.C. Slow action	Solid diameter 10mm x 80mm	M12 Quick disconnect	Figure 1
<a href="#"><u>HC-1-193007</u></a>	\$109k:	Plastic	316 stainless steel	0.29	7 degrees/0.5N	2 N.C. Slow action	Hollow diameter 16mm x 30mm	1 x M16	Figure 1
<a href="#"><u>HC-1-193008</u></a>	\$109p:	Plastic	316 stainless steel	0.32	7 degrees/0.5N	2 N.C. Slow action	Hollow diameter 16mm x 30mm	M12 Quick disconnect	Figure 1

## Dimensions

mm [in]

Figure 1  
HC-1

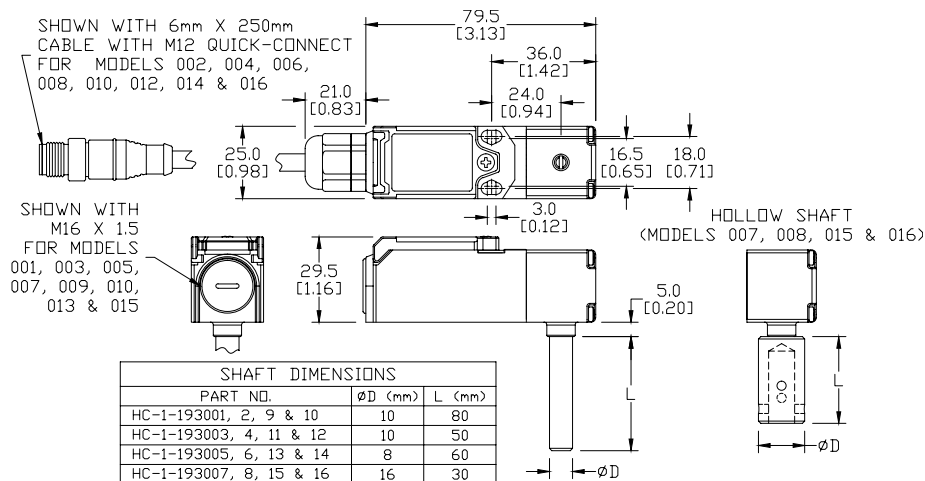

# IDEM Interlock Safety Switches Specifications



Specifications							
	IDIS	INCH/MK1	HC	KM	KP/K-SS	K-15	GLx
Safety Classification and Reliability Data							
Switching Reliability (B10 <sub>d</sub> )	2.5 x 10 <sup>6</sup> operations at 100mA load						1.5 x 10 <sup>6</sup> operations at 100mA load
ISO 13849-1	Up to PLe depending upon system architecture						
EN 62061	Up to SIL3 depending upon system architecture						
Safety Data - Annual Usage	8 cycles per hour / 24 hours per day / 365 days						
Agency Approvals	cULus (E258676), CE						cULus (E258676), CE, TUV
Electrical and General Specifications							
Conductor Sizes	16-12 AWG (1.5 to 2.5 mm <sup>2</sup> )						
Utilization Category	AC15, A300, 3A						
Thermal Current	10A						
Short Circuit Overload Protection	External 10A Fast Acting recommended						
Rated Insulation Voltage	600VAC				500VAC		
Contact Terminals	Stainless steel (Snap action plated brass); Max conductor 1.5 m <sup>2</sup> (IDIS), 2.5 m <sup>2</sup> (KM, K/K-15); 1 N•m [0.74 lb•ft] torque						
Maximum Switching Current	2.5A @24 VDC 6A @ 120VAC, 3A @ 240VDC (720VA Break)						
Maximum Approach/Withdrawal Speed	600mm/s [23.6 in/s]						NA
Enclosure Protection	IP67 (IP69K on all models with both stainless steel head and body)						
Operating Temperature	-25°C to 80°C [-13°F to 176°F]						
Vibration	IEC 68-2-6, 10Hz to 55Hz + 1Hz						10Hz to 500Hz 0.35 mm [0.014 in]
Lid Screws/Torque	Plated brass 1 N•m [0.74 lb•ft]	Stainless steel T20 Torx 1 N•m [0.74 lb•ft]	Stainless steel 1 N•m [0.74 lb•ft]				Stainless steel T20 Torx 1.5 N•m [1.11 lb•ft]
Recommended Mounting Screws/ Torque	M4 1.5 N•m [1.11 lb•ft]	M5 4N•m [2.95 lb•ft]	M4 1.5 N•m [1.11 lb•ft]		M5 4N•m [2.95 lb•ft]		
Head Screws/Torque	Stainless steel, except snap (plated brass) 1 N•m [0.74 lb•ft]	Stainless steel T20 Torx 1 N•m [0.74 lb•ft]	Stainless steel; 1 N•m [0.74 lb•ft]				

# IDEM Interlock/Hinge Safety Travel Charts



## Interlock Safety Switch Types

### Slow-make/slow-break contacts:

A contact element in which the contact motion is dependent on the actuator speed.


### Snap-action contact:

A contact element in which the contact motion is independent of the speed of the actuator. This feature ensures reliable electrical performance even in applications involving very slow moving actuators.

## Contacts Configuration


### 1 NO and 2 NC

Slow-make/slow-break contacts




### 3 NC

Slow-make/slow-break contacts




### 1 NO and 1 NC

Snap action contacts




### 1 NO and 3 NC

Slow-make/slow-break contacts




### 1 NO and 1 NC

Slow-make/slow-break contacts




### 2 NO and 2 NC

Slow-make/slow-break contacts



### 2 NC

Slow-make/slow-break contacts



## Travel Charts



### Interlock Switches

2NC 1NO 6.8 6.0 0 mm

11/12	Open	
21/22	Open	
33/34		Open

3NC 6.0 0 mm

11/12	Open	
21/22	Open	
31/32	Open	

3NC 1NO 6.8 6.0 0 mm

11/12	Open	
21/22	Open	
31/32	Open	
43/44		Open


2NC 2NO 6.8 6.0 0 mm

11/12	Open	
21/22	Open	
33/34		Open
43/44		Open

1NC 1NO (SNAP) 6.5 0 mm

11/12	Open	
23/24		Open

### Hinge Switch

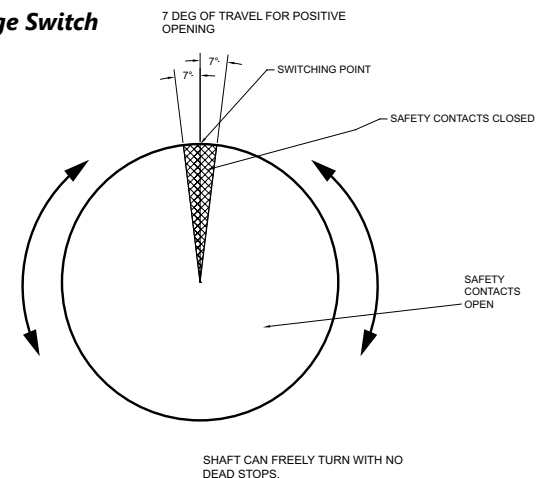

User to ensure that by correct positioning of the shaft at installation causes the safety contacts to open such that no hazard exists to the operator when the door is opened a few degrees.

### Safety Rope Switches

EX	1 NO/2 NC	1 NO/3 N.C.	2 NO/2 N.C.	0 mm	3.5 mm	14.5 mm	17.0 mm
				Latched off - Rope Slack	Tension Range (Switch Reset)	Rope Pulled	
NC	11/12	11/12	11/12	Open		Open	
	21/22	21/22	21/22	Open		Open	
		31/32		Open		Open	
NO	33/34	43/44	33/44		Open		
			43/44		Open		

# Safety Products



*Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.*

*AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.*