

L-Series Rodless Pneumatic Cylinder Accessories

NITRA L-Series accessories include end mounting brackets and center support brackets for longer cylinders. Refer to load chart in this section to determine if a center support is required. Sensor clamp brackets are required for 16mm and 25mm bore cylinders.


NITRA L-Series Rodless Pneumatic Cylinder Accessories				
Item	Part No.	Description	Weight (lbs)	Price
	<u>LEMB-16M</u>	NITRA mounting bracket, end, stainless steel. For use with L16M series rodless cylinders. Mounting screws included.	0.03	\$-43pi:
- No.	<u>LEMB-25M</u>	NITRA mounting bracket, end, stainless steel. For use with L25M series rodless cylinders. Mounting screws included.	0.07	\$-43pj:
	<u>LEMB-32M</u>	NITRA mounting bracket, end, aluminum. For use with L32M series rodless cylinders. Mounting screws included.	0.2	\$43pk:
111	<u>LEMB-40M</u>	NITRA mounting bracket, end, aluminum. For use with L40M series rodless cylinders. Mounting screws included.	0.25	\$-43pl:
9/	<u>LCMB-16M</u>	NITRA mounting bracket, center, aluminum. For use with L16M series rodless cylinders.	0.02	\$43pn:
011	<u>LCMB-25M</u>	NITRA mounting bracket, center, aluminum. For use with L25M series rodless cylinders.	0.02	\$43po:
	<u>LCMB-32M</u>	NITRA mounting bracket, center, aluminum. For use with L32M series rodless cylinders. Mounting screws included.	0.16	\$43pp:
	LCMB-40M	NITRA mounting bracket, center, aluminum. For use with L40M series rodless cylinders. Mounting screws included.	0.23	\$43pq:
	LSMB-16M25M	NITRA mounting bracket, switch, aluminum. For use with L16M and L25M series rodless cylinders and CPS switches. Mounting screws included.	0.03	\$4gny:
	LSMB2-16M25M	NITRA mounting bracket, switch, aluminum. For use with L16M and L25M series rodless cylinders and CPS9D and CPS9E switches. Mounting screw included.	0.02	\$;-6a]j:

See our website www.AutomationDirect.com for complete Engineering drawings



L-Series Rodless Pneumatic Cylinder Accessories

Mounting guidelines for 16mm and 25mm bore cylinders

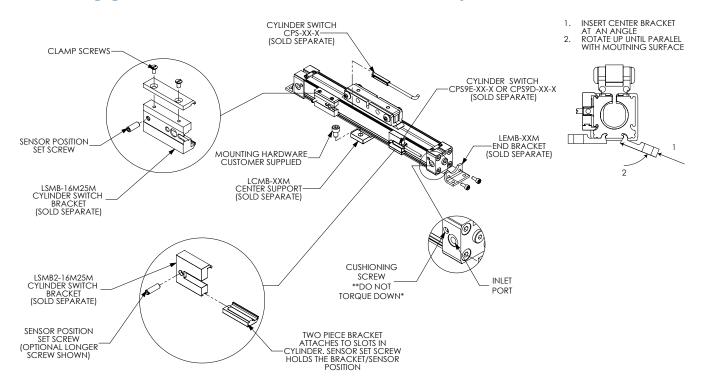

Mounting guidelines for 32mm and 40mm bore cylinders

