



# Nickel-Plated Brass Push-to-Connect Fittings



Part No. [MBT14-18N-B](#)

**NITRA** pneumatic push-to-connect male branch tee fittings with rotating nickel-plated brass body, nickel-plated brass threads, stainless steel tube gripping claws and pre-applied Teflon thread sealant (#10-32, M5 and G threads have O-ring instead of thread sealant). For use with flexible tubing. Five fittings per package.

- Performs well in harsh duty or washdown applications
- Working Pressure 0 to 300 psi
- Working Temperature 0 to 175°F (-17.8 to 79.4°C)

NITRA™ Nickel-Plated Brass Male Branch T					
Imperial Tube and Threads					
Part No.	Size	Price	Drawing Link	Qty. per pack	Weight (lb)
<a href="#">MBT14-18N-B</a>	(1) 1/8in male NPT x (2) 1/4in push-to-connect	\$601q:	<a href="#">PDF</a>	5	0.32
<a href="#">MBT14-14N-B</a>	(1) 1/4in male NPT x (2) 1/4in push-to-connect	\$601s:	<a href="#">PDF</a>	5	0.35
<a href="#">MBT38-14N-B</a>	(1) 1/4in male NPT x (2) 3/8in push-to-connect	\$601y:	<a href="#">PDF</a>	5	0.59
<a href="#">MBT38-38N-B</a>	(2) 3/8in push-to-connect x (1) 3/8in male NPT	\$601z:	<a href="#">PDF</a>	5	0.61
Hybrid Imperial to Metric R Threads (BSPT)					
<a href="#">MBT14-18R-B</a>	(1) R1/8 male BSPT x (2) 1/4in push-to-connect	\$;601t:	<a href="#">PDF</a>	5	0.3
<a href="#">MBT14-14R-B</a>	(1) R1/4 male BSPT x (2) 1/4in push-to-connect	\$601u:	<a href="#">PDF</a>	5	0.35
<a href="#">MBT38-14R-B</a>	(1) R1/4 male BSPT x (2) 3/8in push-to-connect	\$;601j:	<a href="#">PDF</a>	5	0.56
Hybrid Imperial to Metric G Threads (BSPP)					
<a href="#">MBT14-18G-B</a>	(1) G1/8 male BSPP x (2) 1/4in push-to-connect	\$601v:	<a href="#">PDF</a>	5	0.31
<a href="#">MBT14-14G-B</a>	(1) G1/4 male BSPP x (2) 1/4in push-to-connect	\$601x:	<a href="#">PDF</a>	5	0.37
<a href="#">MBT38-14G-B</a>	(1) G1/4 male BSPP x (2) 3/8in push-to-connect	\$;601i:	<a href="#">PDF</a>	5	0.55




# Nickel-Plated Brass Push-to-Connect Fittings


**NITRA** nickel-plated brass push-to-connect fittings are an excellent choice for many industrial applications. They have an attractive, easily maintained finish and have a higher pressure and temperature rating when compared to resin fittings.

## Features

- Large selection of fitting configurations
- Inch and metric sizes available
- Hybrid Inch to metric conversion fittings available
- NPT, BSPT (R) and BSPP (G) threads available
- Nickel-plated brass bodies, threads and release rings
- Threaded elbow and tee bodies can be rotated after installation
- For use with air and water
- Working pressure 0 to 300 psi
- Working Temperature 0 to 175°F (-17.8 to 79.4°C)

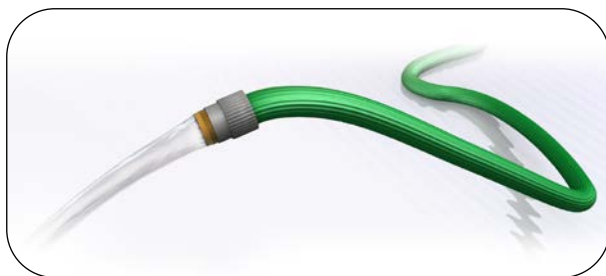

**Ideal for washdown and harsh environments**

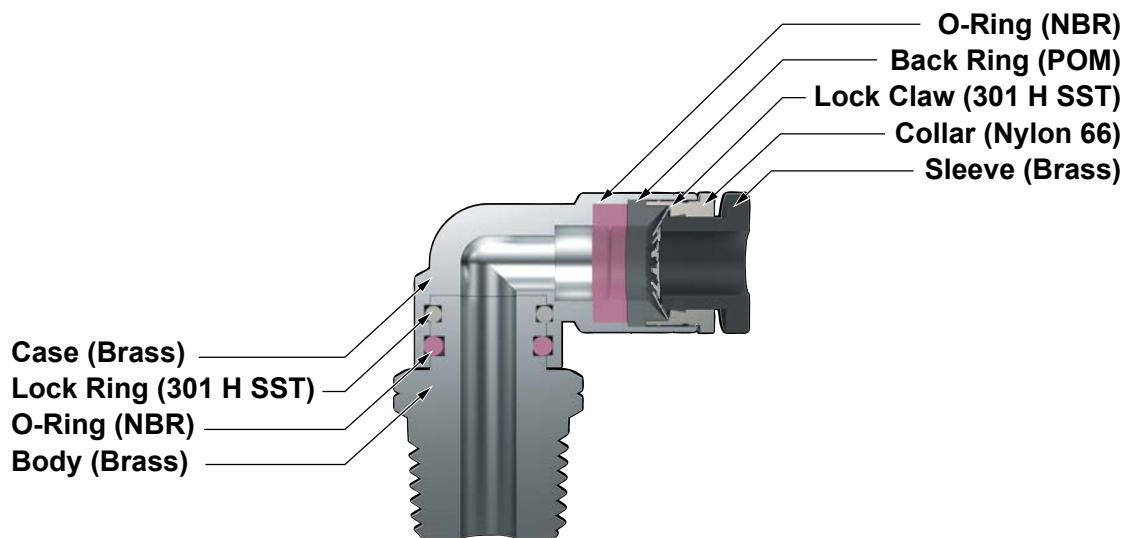

*Fitting Cut-away Diagram*