



# Nickel-Plated Brass Push-to-Connect Fittings

Part No. [UL532-B](#)

**NITRA** pneumatic push-to-connect union elbow fittings with nickel-plated brass body and stainless steel tube gripping claws. For use with flexible tubing. Five fittings per package.

- Performs well in harsh duty or washdown applications
- Working Pressure 0 to 300 psi
- Working Temperature 0 to 175°F (-17.8 to 79.4°C)

| NITRA™ Nickel-Plated Brass Union Elbow |                                                                      |         |                     |               |             |
|----------------------------------------|----------------------------------------------------------------------|---------|---------------------|---------------|-------------|
| Imperial Tube                          |                                                                      |         |                     |               |             |
| Part No.                               | Size                                                                 | Price   | Drawing Link        | Qty. per pack | Weight (lb) |
| <a href="#">UL532-B</a>                | (1) 5/32in (4mm) push-to-connect to (1) 5/32in (4mm) push-to-connect | \$602b: | <a href="#">PDF</a> | 5             | 0.15        |
| <a href="#">UL14-B</a>                 | (1) 1/4in push-to-connect to (1) 1/4in push-to-connect               | \$602d: | <a href="#">PDF</a> | 5             | 0.17        |
| <a href="#">UL38-B</a>                 | (1) 3/8in push-to-connect to (1) 3/8in push-to-connect               | \$602f: | <a href="#">PDF</a> | 5             | 0.37        |
| Metric Tube                            |                                                                      |         |                     |               |             |
| <a href="#">UL6M-B</a>                 | (1) 6mm push-to-connect to (1) 6mm push-to-connect                   | \$602c: | <a href="#">PDF</a> | 5             | 0.18        |
| <a href="#">UL8M-B</a>                 | (1) 5/16in (8mm) push-to-connect to (1) 5/16in (8mm) push-to-connect | \$602e: | <a href="#">PDF</a> | 5             | 0.23        |

Part No. [UT532-B](#)

**NITRA** pneumatic push-to-connect union T fittings with nickel plated brass body and stainless steel tube gripping claws. For use with flexible tubing. Five fittings per package.

- Performs well in harsh duty or washdown applications
- Working Pressure 0 to 300 psi
- Working Temperature 0 to 175°F (-17.8 to 79.4°C)

| NITRA™ Nickel-Plated Brass Union T |      |         |                     |               |             |
|------------------------------------|------|---------|---------------------|---------------|-------------|
| Imperial Tube                      |      |         |                     |               |             |
| Part No.                           | Size | Price   | Drawing Link        | Qty. per pack | Weight (lb) |
| <a href="#">UT532-B</a>            |      | \$602g: | <a href="#">PDF</a> | 5             | 0.14        |
| <a href="#">UT14-B</a>             |      | \$602i: | <a href="#">PDF</a> | 5             | 0.24        |
| <a href="#">UT38-B</a>             |      | \$602k: | <a href="#">PDF</a> | 5             | 0.5         |
| Metric Tube                        |      |         |                     |               |             |
| <a href="#">UT6M-B</a>             |      | \$602h: | <a href="#">PDF</a> | 5             | 0.25        |
| <a href="#">UT8M-B</a>             |      | \$602j: | <a href="#">PDF</a> | 5             | 0.31        |




# Nickel-Plated Brass Push-to-Connect Fittings


**NITRA** nickel-plated brass push-to-connect fittings are an excellent choice for many industrial applications. They have an attractive, easily maintained finish and have a higher pressure and temperature rating when compared to resin fittings.

## Features

- Large selection of fitting configurations
- Inch and metric sizes available
- Hybrid Inch to metric conversion fittings available
- NPT, BSPT (R) and BSPP (G) threads available
- Nickel-plated brass bodies, threads and release rings
- Threaded elbow and tee bodies can be rotated after installation
- For use with air and water
- Working pressure 0 to 300 psi
- Working Temperature 0 to 175°F (-17.8 to 79.4°C)

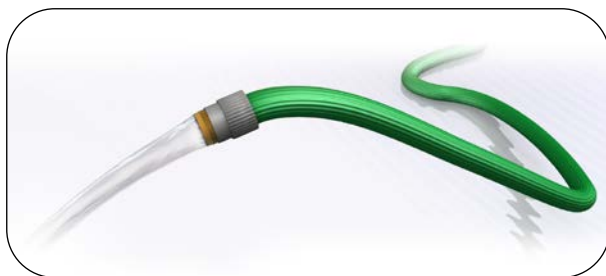

**Ideal for washdown and harsh environments**

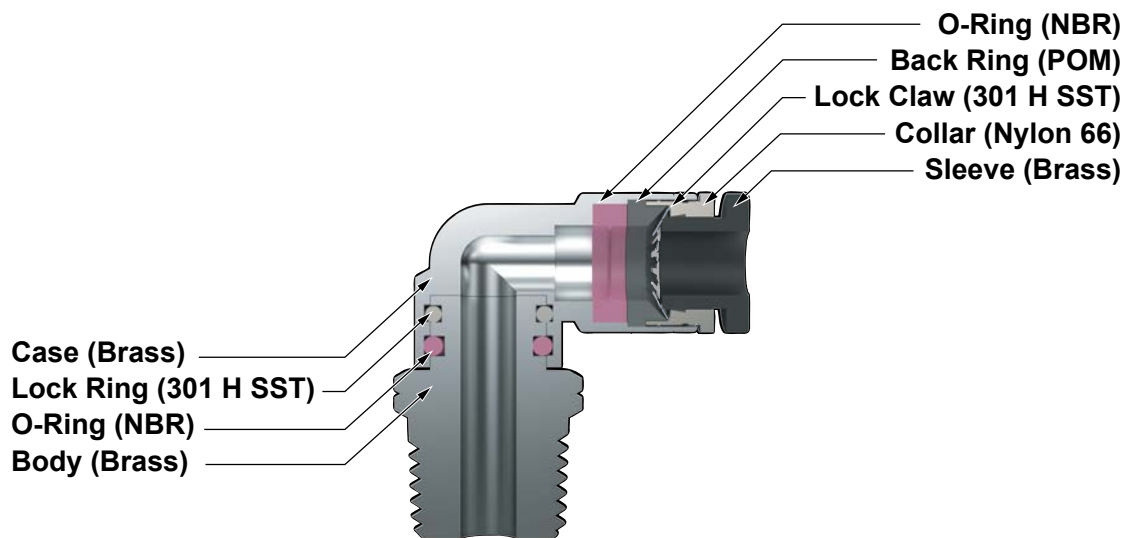

*Fitting Cut-away Diagram*