


Reflectors

RL Series Reflectors for Polarized Reflective Photoelectric Sensors (All Models)

- Suitable for use with polarized light photoelectric sensors
- Shapes and sizes for most applications
- Miniature types for close mounting in multiple sensor installations
- Single hole, dual hole and self-adhesive mounting types available
- Single and 10-packs available

Installation Notes

- Keep the reflector surface clean to ensure peak detection performance. This is especially true when the maximum sensing range is being used. Clean using a damp cloth.
- When selecting a reflector, it is important to consider the ambient conditions it will be exposed to. Dusty or high humidity conditions may reduce the sensing range as much as 90%.
- Reflectors should be positioned at a 90° angle to the optical axis with a tolerance of ±15°.

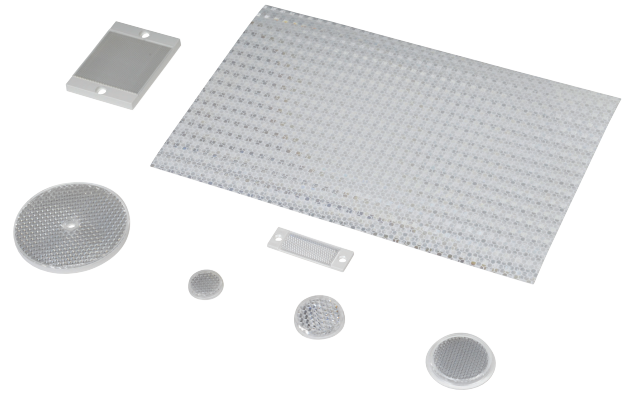

Specifications

Model	Price	Quantity	Dimensions	Degree of Protection	Mounting	Materials	
RL102	\$35.00	10 per pack	25mm [0.98 in]	IEC IP67	Customer-supplied adhesive or other mounting method required	Reflective face: PMMA Polymethylmethacrylate (acrylic) Base material: ABS (Acrylonitrile-butadiene-styren)	
RL102-1	\$3.75	1 per pack					
RL103	\$40.00	10 per pack	34.5 mm [1.36 in]				
RL103-1	\$4.25	1 per pack					
RL104	\$40.00	10 per pack	46mm [1.81 in]				
RL104-1	\$4.25	1 per pack					
RL105 *	\$35.00	10 per pack	90 x 40 mm [3.54 x 1.58 in]		Two 4.3 mm holes		
RL105-1 *	\$3.75	1 per pack					
RL105G *	\$35.00	10 per pack	95 x 38 mm [3.74 x 1.50 in]		Two 6mm holes		
RL105G-1 *	\$3.75	1 per pack					
RL106G	\$40.00	10 per pack	182 x 42 mm [7.17 x 1.65 in]		One 5mm hole		
RL106G-1	\$4.25	1 per pack					
RL110	\$18.00	10 per pack	84mm [3.31 in]		Two 3mm holes		
RL110-1	\$2.00	1 per pack					
RL116	\$18.00	10 per pack	41 x 60 mm [3.54 x 2.36 in]				
RL116-1	\$2.00	1 per pack					
RL100DA4	\$32.50	1 per pack	200 x 300 mm [7.87 x 11.81 in]		Self-adhesive		Paper (Acrylic tape with micro prism)
RL100DC4	\$10.00	1 per pack	50 x 300 mm [1.97 x 11.81 in]				
RL100DQ1	\$7.50	1 per pack	100 x 100 mm [3.94 x 3.94 in]				
RL111G	\$52.00	10 per pack	22.5 x 47 mm [0.89 x 21.85 in]		Two 3mm slots		Reflective face: PMMA Polymethylmethacrylate (acrylic) Base material: ABS (Acrylonitrile-butadiene-styren)
RL111G-1	\$6.00	1 per pack					
RL112G	\$40.00	10 per pack	19 x 73 mm [0.75 x 2.87 in]				
RL112G-1	\$4.25	1 per pack					
RL113G	\$46.00	10 per pack	51.4 x 60.3 mm [2.02 x 2.37 in]	Two 4mm slots			
RL113G-1	\$5.00	1 per pack					

Not recommended for applications involving moist air environments or water immersion.

* Note: RL105 and RL105-1 reflectors are being replaced by the RL105G and RL105G-1 models, and will no longer be available once our current stock is depleted.


The new reflectors function the same but the dimensions are slightly different. Compare the outside dimensions shown in this table and the dimensional drawings on the next page.

Reflectors


Dimensions

mm [inches]


RL110/RL110-1

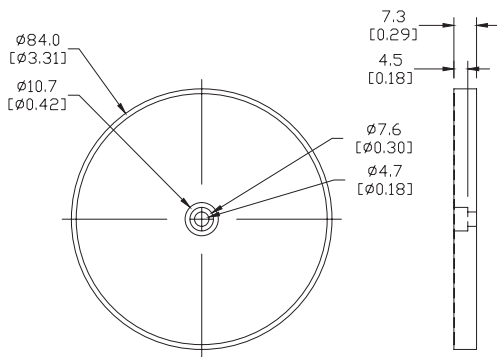


RL111G/RL111G-1

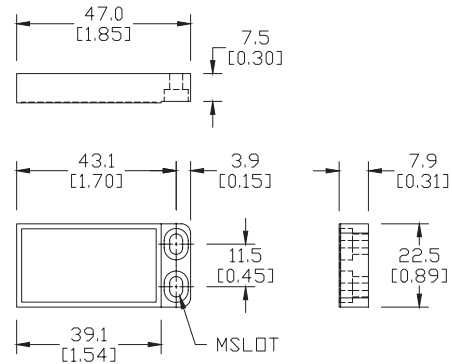


RL112G/RL112G-1

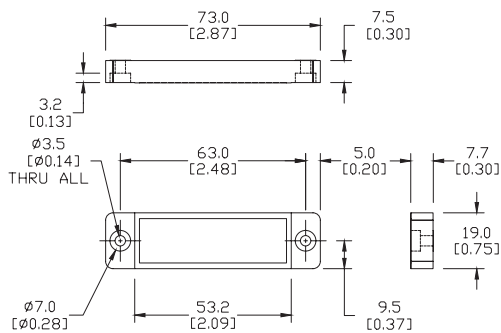


RL113G/RL113G-1

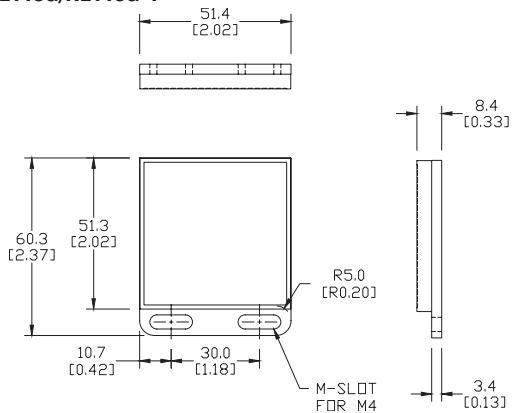


RL116/RL116-1

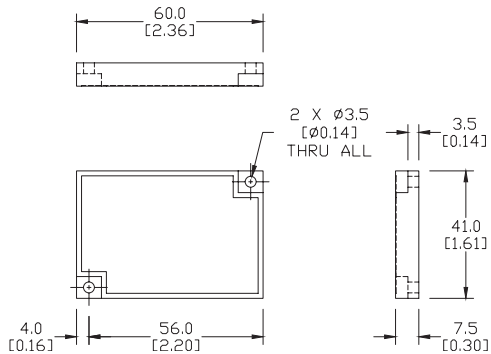


RL201/RL201-1

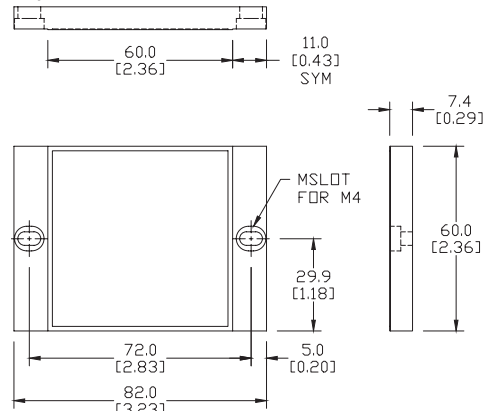

RL203/RL203-1

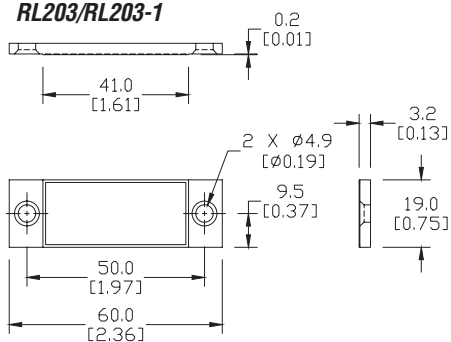

RL204/RL204-1

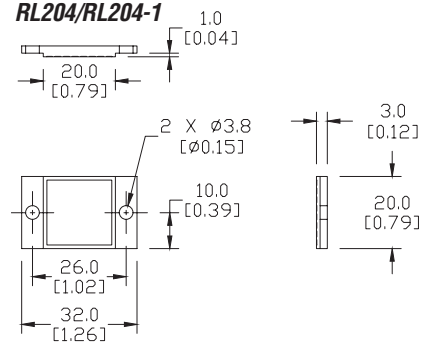

See our website: www.AutomationDirect.com for complete engineering drawings

Reflectors

Reflector for Photoelectric Laser Sensor

Accessories for OPT Series Photoelectric Sensors			
Part Number	Price	Description	Weight [lb]
OPT2030	\$11.00	Reflector, for photoelectric laser sensors, square, 100 x 100 mm. Plastic.	0.20


Note: OPT2015 requires purchase of OPT2030 reflector. <50m sensing distance requires 1 reflector. 50-100 m sensing distance requires 4 reflectors.



OPT2030

Dimensions

mm [inches]

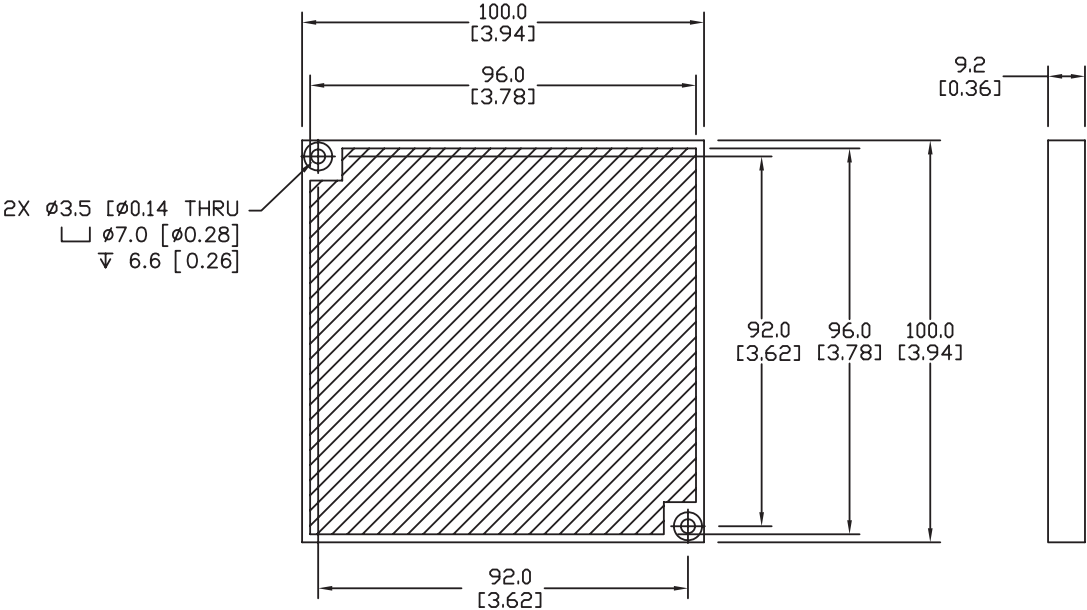

See our website: www.AutomationDirect.com for complete engineering drawings