


# Q5088-1 Cut Sheet



Quabbin Datamax continuous flexing Cat5e industrial Ethernet cable, shielded, 4 twisted pairs, 26 AWG, 7-stranded, tinned copper, HDPE conductor insulation material, TPE jacket, teal, cut to length.

For complete product information, please see this item on our store at the following link:

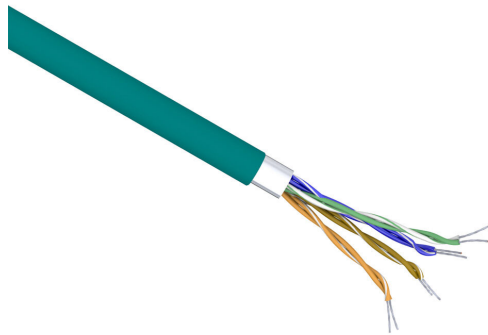

<https://www.automationdirect.com/pn/Q5088-1>

## Technical Specifications

<b>Brand</b>	Quabbin
<b>Item</b>	Cable
<b>Series</b>	Datamax
<b>Protocol</b>	Ethernet
<b>Wire/Cable Type</b>	Cat5e industrial Ethernet
<b>UL Wire/Cable Type</b>	CMX
<b>Application</b>	Data
<b>Flexibility</b>	Continuous flexing
<b>Voltage Rating</b>	300V
<b>Conductors</b>	4 twisted pairs
<b>Conductor Size</b>	26 AWG
<b>Conductor Stranding</b>	7-stranded
<b>Conductor Material</b>	Tinned copper
<b>Conductor Insulation Material</b>	High-density polyethylene (HDPE)
<b>Conductor Insulation Color</b>	Pair 1: blue, white/blue, Pair 2: orange, white/orange, Pair 3: green, white/green and Pair 4: brown, white/brown

<b>Shielding</b>	Shielded
<b>Jacket Material</b>	TPE
<b>Jacket Color</b>	Teal
<b>Nominal Overall Cable Diameter</b>	0.245in
<b>Bulk Length</b>	Cut to length
<b>Package Type</b>	1 to 99ft = Coil, 100 to 653ft = 14 x 7in Reel, 654 to 932ft = 14 x 10in Reel, 933 to 1443ft = 16 x 10in Reel, 1444 to 2032ft = 18 x 10in Reel, 2033 to 2642ft = 18 x 13in Reel, 2643 to 5676ft = 24 x 17in Wooden Reel, 5677 to 9332ft = 30 x 17in Wooden Reel, 9333 to MAX = Large Wooden Reel

## Agency Approvals

<b>UL Listed File #</b>	E118830
<b>UL Recognized File #</b>	None
<b>UL Hazardous File #</b>	None
<b>CSA File #</b>	None
<b>RoHS Status</b>	Meets RoHS Chemical Restrictions - No CE (See RoHS Statement Below)
<b>EU REACH</b>	<a href="#">View EU REACH document</a>
<b>Other</b>	<a href="#">RoHS Statement</a>