


# Q5772-1 Cut Sheet



Quabbin continuous flexing Cat5e industrial Ethernet cable, unshielded, 2 twisted pairs, 24 AWG, 7/32-stranded, tinned copper, HDPE conductor insulation material, FR-TPE jacket, teal, cut to length.

For complete product information, please see this item on our store at the following link:

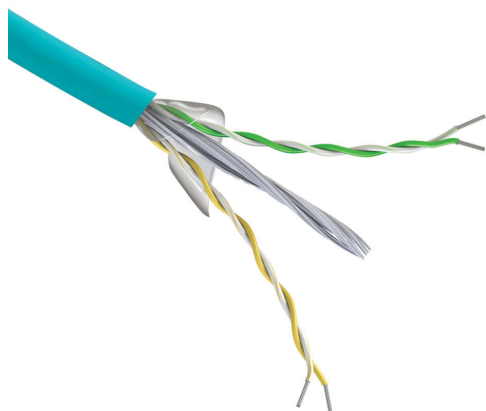

<https://www.automationdirect.com/pn/Q5772-1>

## Technical Specifications

<b>Brand</b>	Quabbin
<b>Item</b>	Cable
<b>Protocol</b>	Ethernet
<b>Wire/Cable Type</b>	Cat5e industrial Ethernet
<b>UL Wire/Cable Type</b>	CMX and AWM
<b>Applicable Standards</b>	UL 2463
<b>Application</b>	Data
<b>Flexibility</b>	Continuous flexing
<b>Voltage Rating</b>	600V
<b>Conductors</b>	2 twisted pairs
<b>Conductor Size</b>	24 AWG
<b>Conductor Stranding</b>	7/32-stranded
<b>Conductor Material</b>	Tinned copper
<b>Conductor Insulation Material</b>	High-density polyethylene (HDPE)

<b>Conductor Insulation Color</b>	Pair 1: orange, white/orange and Pair 2: green, white/green
<b>Shielding</b>	Unshielded
<b>Jacket Material</b>	FR-TPE
<b>Jacket Color</b>	Teal
<b>Nominal Overall Cable Diameter</b>	0.24in
<b>Bulk Length</b>	Cut to length
<b>Package Type</b>	<ul style="list-style-type: none"><li>• 20 to 99ft = Coil</li><li>• 100 to 675ft = 14 x 7in Reel</li><li>• 676 to 965ft = 14 x 10in Reel</li><li>• 966 to 1485ft = 16 x 10in Reel</li><li>• 1486 to 2070ft = 18 x 10in Reel</li><li>• 2071 to 2695ft = 18 x 13in Reel</li><li>• 2696 to 5000ft = 24 x 17in Wooden Reel</li></ul>

## Agency Approvals

<b>UL Listed File #</b>	E118830
<b>UL Recognized File #</b>	None
<b>UL Hazardous File #</b>	None
<b>CE</b>	None
<b>CSA File #</b>	None
<b>RoHS Status</b>	Meets RoHS Chemical Restrictions - No CE (See RoHS Statement Below)
<b>EU REACH</b>	<a href="#">View EU REACH document</a>
<b>Other</b>	<a href="#">RoHS Statement</a>