

# Suremotion Drive Couplings

## Drive Couplings Overview

Rotating shaft-driven mechanical components are commonly used in all forms of machinery that perform the various processes and functions of modern industry. Perfect alignment of shafts and rotating components is desired, but it is nearly impossible to build a real-world machine in which adjacent shaft ends align perfectly. Shaft ends can be misaligned radially or angularly, exhibit axial displacement, or experience a combination of all three. Misalignment will place stresses on shafts and related parts of the assembly such as bearings, which can result in early failure of both.

Drive couplings can be used to compensate for shaft misalignment, whether the misalignment is an intentional or an unintentional part of the design. When designing or modifying a system, there are essential factors to consider for choosing the correct couplings for the application.

### Design/Selection Factors:

(Refer to the specification tables herein for the particular specifications of each type of drive coupling.)


• **RPM:** For higher rpm applications, choose Jaw/Spider or Beam-Style Servo couplings. For lower rpm, consider Double-Loop or Oldham couplings.





• **Torque:** Consider the torque requirements of the application, and the torque specifications of the different drive coupling types. peak torque generally occurs at start-up, operating torque at steady-state operation, and reversing or braking torque during rapid acceleration or deceleration or direction changes.

• **Backlash:** Backlash is a measurement of the positional accuracy of the coupling, which is important for reversing and/or motion control applications. Zero backlash is ultimately desirable, but more expensive than necessary for low-precision applications.

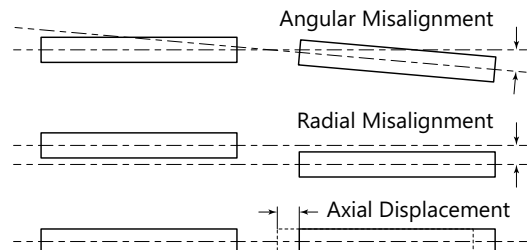For high-precision applications, choose Beam-Style Servo or Oldham couplings. For applications requiring less precision, consider Jaw/Spider or Double-Loop couplings.

• **Misalignment:** Some degree of angular, axial, or radial misalignment/displacement between shafts is almost unavoidable. Drive couplings can compensate for this misalignment.



Coupling Type Comparisons				
Coupling Type	Jaw / Spider	Double Loop	Oldham	Beam-Style Servo
<b>Representative Photo</b>				
<b>Purpose</b>	most common	light duty	general purpose	high performance & torque
<b>Hub Material</b>	aluminum	stainless steel	aluminum	416 stainless steel
<b>Center Material</b>	polyurethane	Hytrel™	Delrin™	420 stainless steel
<b>Mounting Method</b>	clamp	set screw	clamp	set screw
<b>Electrical Isolation</b>	yes	yes	yes	no
<b>Backlash</b>	varies	varies	zero	zero
<b>Misalignment Capacity</b>	++ (axial)	+++	++	+
<b>Breakable "Mechanical Fuse"</b>	no (fail safe)	no	yes	no
<b>Relative Price</b>	\$\$	\$\$	\$	\$\$\$

# Suremotion Drive Couplings

## Double Loop Couplings



### Features

- High torsional rigidity
- One-piece design
- Hubs made of series 300 stainless steel
- Double loop made of DuPont Hytrel™
- Corrosion protection
- Outstanding resistance to acids, alkalis, solvents, oils, grease, ozone
- Wide operating temperature range: -40 to 100 °C (-40 to 212 °F)

- Electrical isolation
- Damping of shock and vibration
- Speeds up to 3,000rpm

### Applications


- Light-duty applications
- Medium-speed applications
- Applications in which inertia is NOT a factor

Double Loop Stainless Steel Drive Couplings															
Part Number	Price	Size	Bore	Max rpm	Max Torque @ Max Displacement (lb-in) N·m	Max Misalignment			Weight (lb)						
						Radial (in) mm	Axial (in) mm	Angular (°)							
DC-DLSS10-02	\$37.00	10	1/8 in	3,000	[4.4] 0.5	[0.10] 2.6	[0.18] 4.5	10	0.06						
DC-DLSS10-03	\$37.00		3/16 in												
DC-DLSS10-06M	\$37.00		6mm												
DC-DLSS10-04	\$37.00		1/4 in												
DC-DLSS10-05	\$37.00		5/16 in												
DC-DLSS10-08M	\$37.00		8mm												
DC-DLSS20-04	\$41.50		20							1/4 in	3,000	[15.9] 1.8	[0.30] 7.5	15	0.20
DC-DLSS20-05	\$41.50									5/16 in					
DC-DLSS20-08M	\$41.50	8mm													
DC-DLSS20-06	\$41.50	3/8 in													
DC-DLSS20-12M	\$41.50	12mm													
DC-DLSS20-08	\$41.50	1/2 in													
DC-DLSS30-12M	\$45.50	30		12mm	3,000	[44.3] 5.0	[0.13] 3.2	15	0.27						
DC-DLSS30-08	\$45.50			1/2 in											
DC-DLSS30-14M	\$45.50		14mm												
DC-DLSS30-10	\$45.50		5/8 in												
DC-DLSS40-08	\$51.00	40	1/2 in	3,000	[88.5] 10.0	[0.43] 11.0	15	0.30							
DC-DLSS40-14M	\$51.00		14mm												
DC-DLSS40-10	\$51.00		5/8 in												
DC-DLSS40-16M	\$51.00		16mm												

### Dimensions (in [mm])

Double Loop Stainless Steel Drive Coupling Dimensions											
Part Number	Size	Set Screw	ØB	ØC	L						
				(in [mm])							
DC-DLSS10-02	10	M3	1/8 in	1.06 [26.9]							
DC-DLSS10-03			3/16 in								
DC-DLSS10-06M			6mm								
DC-DLSS10-04			1/4 in								
DC-DLSS10-05			5/16 in								
DC-DLSS10-08M			8mm								
DC-DLSS20-04			20				M4	1/4 in	1.89 [48.0]		
DC-DLSS20-05								5/16 in			
DC-DLSS20-08M	8mm										
DC-DLSS20-06	3/8 in										
DC-DLSS20-12M	12mm										
DC-DLSS20-08	1/2 in										
DC-DLSS30-12M	30	M5		12mm	2.13 [54.1]	2.17 [55.1]					
DC-DLSS30-08				1/2 in							
DC-DLSS30-14M			14mm								
DC-DLSS30-10			5/8 in								
DC-DLSS40-08	40	M6	1/2 in	2.20 [55.9]	2.20 [55.9]						
DC-DLSS40-14M			14mm								
DC-DLSS40-10			5/8 in								
DC-DLSS40-16M			16mm								

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete Engineering drawings.

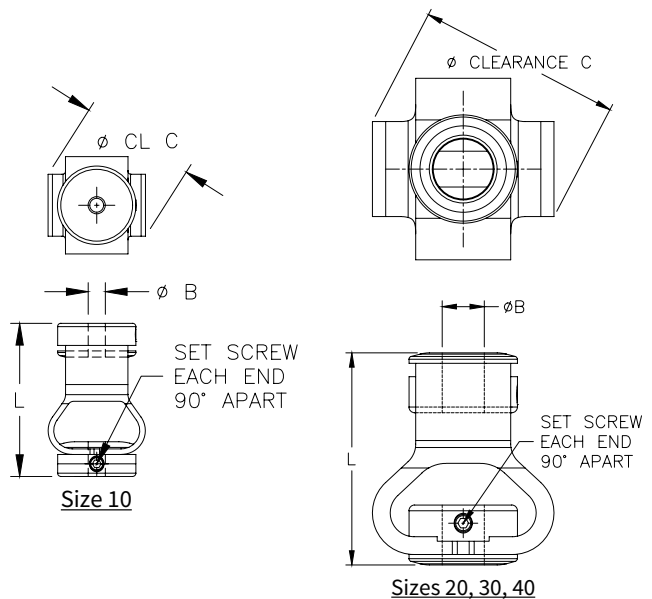

# Suremotion Drive Couplings

## Accessories – Bore Reducers



### Features

- For use in all SureMotion drive coupling hubs to reduce bore size
- Split-collar design with 2 set screw flats will not mark shaft
- 25% greater holding power than standard split collar
- Hardened stainless steel

Bore Reducers – Stainless Steel Clamping Type						
Part Number	Price	Outside Diameter		Inside Diameter		Length
		Nominal	Actual	Nominal	Actual	
<b>DC-BRS04-02</b>	\$7.75	1/4 in	0.250 in	1/8 in	0.125 in	0.221 in
<b>DC-BRS04-04M</b>	\$7.75			4mm	4mm	
<b>DC-BRS04-03</b>	\$7.75			3/16 in	0.1875 in	
<b>DC-BRS04-05M</b>	\$7.75			5mm	5mm	
<b>DC-BRS08-06M</b>	\$10.00	1/2 in	0.500 in	6mm	6mm	0.449 in
<b>DC-BRS08-04</b>	\$10.00			1/4 in	0.25 in	
<b>DC-BRS08-05</b>	\$10.00			5/16 in	0.3125 in	
<b>DC-BRS08-08M</b>	\$10.00			8mm	8mm	
<b>DC-BRS08-06</b>	\$10.00			3/8 in	0.375 in	
<b>DC-BRS08-10M</b>	\$10.00	5/8 in	0.625 in	10mm	10mm	0.460 in
<b>DC-BRS10-10M</b>	\$11.50			10mm	10mm	
<b>DC-BRS10-07</b>	\$11.50			7/16 in	0.4375 in	
<b>DC-BRS10-12M</b>	\$11.50			12mm	12mm	
<b>DC-BRS10-08</b>	\$11.50			1/2 in	0.5 in	
<b>DC-BRS10-14M</b>	\$11.50			14mm	14mm	
<b>DC-BRS10-09</b>	\$11.50	3/4 in	0.750 in	9/16 in	0.5625 in	0.646 in
<b>DC-BRS12-06</b>	\$14.00			3/8 in	0.375 in	
<b>DC-BRS12-12M</b>	\$14.00			12mm	12mm	
<b>DC-BRS12-08</b>	\$14.00			1/2 in	0.5 in	
<b>DC-BRS12-10</b>	\$14.00			5/8 in	0.625 in	
<b>DC-BRS12-16M</b>	\$14.00	7/8 in	0.875 in	16mm	16mm	0.755 in
<b>DC-BRS12-11</b>	\$14.00			11/16 in	0.6875 in	
<b>DC-BRS14-14M</b>	\$15.00			14mm	14mm	
<b>DC-BRS14-10</b>	\$15.00			5/8 in	0.625 in	
<b>DC-BRS14-16M</b>	\$15.00	1 in	1.000 in	16mm	16mm	0.773 in
<b>DC-BRS14-11</b>	\$15.00			11/16 in	0.6875 in	
<b>DC-BRS14-18M</b>	\$15.00			18mm	18mm	
<b>DC-BRS14-12</b>	\$15.00	1-1/4 in	1.250 in	3/4 in	0.75 in	0.793 in
<b>DC-BRS16-10</b>	\$15.50			5/8 in	0.625 in	
<b>DC-BRS16-18M</b>	\$15.50			18mm	18mm	
<b>DC-BRS16-12</b>	\$15.50			3/4 in	0.75 in	
<b>DC-BRS16-20M</b>	\$15.50			20mm	20mm	
<b>DC-BRS16-13</b>	\$15.50			13/16 in	0.8125 in	
<b>DC-BRS16-14</b>	\$15.50	7/8 in	0.875 in			
<b>DC-BRS20-22M</b>	\$16.00	1-1/4 in	1.250 in	22mm	22mm	0.793 in
<b>DC-BRS20-24M</b>	\$16.00			24mm	24mm	
<b>DC-BRS20-25M</b>	\$16.00			25mm	25mm	
<b>DC-BRS20-16</b>	\$16.00			1 in	1.0 in	
<b>DC-BRS20-17</b>	\$16.00			1-1/16 in	1.0625 in	
<b>DC-BRS20-18</b>	\$16.00			1-1/8 in	1.125 in	