

# Heavy Duty Incremental Encoders (Metric Dimension Encoders)

## TRD-GK series

### Features

A heavy duty encoder is the most rugged encoder you can buy. Top-of-the-line bearings allow a service life of 12 billion revolutions. Features include:

- 10 mm solid shaft
- Rugged body with 78 mm diameter and 60 mm depth
- Splash-proof IP65 rating
- Incremental operation from 30 pulses per revolution to 5,000 pulses per revolution
- 100 kHz maximum response frequency
- 10-30 VDC, Totem-pole output



**Solid-shaft (TRD-GK) model**

Heavy Duty Standard Shaft Incremental Encoders				
Model	Price	Pulses per Revolution	Input Voltage	Output
TRD-GK30-RZD	\$241.00	30	10-30 VDC	Totem-pole (sink/source)
TRD-GK100-RZD	\$241.00	100		
TRD-GK120-RZD	\$241.00	120		
TRD-GK200-RZD	\$241.00	200		
TRD-GK240-RZD	\$241.00	240		
TRD-GK250-RZD	\$241.00	250		
TRD-GK300-RZD	\$241.00	300		
TRD-GK360-RZD	\$241.00	360		
TRD-GK400-RZD	\$241.00	400		
TRD-GK500-RZD	\$275.00	500		
TRD-GK600-RZD	\$275.00	600		
TRD-GK800-RZD	\$275.00	800		
TRD-GK1000-RZD	\$275.00	1000		
TRD-GK1200-RZD	\$275.00	1000		
TRD-GK1500-RZD	\$329.00	1500		
TRD-GK1800-RZD	\$329.00	1800		
TRD-GK2000-RZD	\$329.00	2000		
TRD-GK2500-RZD	\$391.00	2500		
TRD-GK3600-RZD	\$430.00	3600		
TRD-GK5000-RZD	\$430.00	5000		

Electrical Specifications	
<b>Model</b>	<b>TRD-GKxxx-RZD</b>
<b>Power Supply</b>	<b>Operating Voltage</b>
	<b>Allowable Ripple</b>
	<b>Current Consumption</b>
<b>Output Waveform</b>	<b>Output Signal</b>
	<b>Duty Ratio</b>
	<b>Max. Frequency Response</b>
	<b>Operating Speed</b>
	<b>Signal Width at Home Position</b>
	<b>Rise/Fall Time</b>
	<b>Output</b>
<b>Current: Outflow: H</b>	
<b>Voltage: H</b>	
<b>Voltage: L</b>	
	<b>Load Power Voltage</b>
<i>* To be supplied by Class II source</i>	
Mechanical Specifications	
<b>Starting Torque</b>	Max. 0.1 N·m (0.07 ft·lbs) max. at 20°C (68°F)
<b>Max. Allowable Shaft Load</b>	Radial: 100N (22.48 lbs) Axial: 50N (11.24 lbs)
<b>Max. Allowable Speed</b>	5,000 rpm
<b>Service Life of Bearing</b>	12 billion revolutions (at max. allowable speed)
<b>Wire Size</b>	AWG24
<b>Weight</b>	Approx. 600g (21.16 oz) with 2m cable
Environmental Specifications	
<b>Ambient Temperature</b>	-10 to 70 °C [14 to 158 °F]
<b>Storage Temperature</b>	-25 to 85 °C [-13 to 185 °F]
<b>Operating Humidity</b>	35–85% RH (with no condensation)
<b>Insulation Resistance</b>	50MΩ min.
<b>Vibration Resistance</b>	At 500P or less: Durable for one hour along three axes at 10 to 55 Hz with 0.75 mm amplitude At 600P or more: Durable for one hour along three axes at 10 to 55 Hz with 0.35 mm amplitude
<b>Shock Resistance</b>	At 500P or less: 11 ms with 980 m/s <sup>2</sup> applied three times along three axes At 600P or more: 11 ms with 294 m/s <sup>2</sup> applied three times along three axes
<b>Protection</b>	IP65



# Heavy Duty Incremental Encoders (Metric Dimension Encoders)

## TRD-GK series Accessories Couplings

For encoders with a solid shaft, please select a coupling that fits your encoder. All couplings are in stock, ready to ship. See the "Encoder Couplings" section for more information.


## Mounting Brackets

Mounting brackets for all TRD-GK encoders.

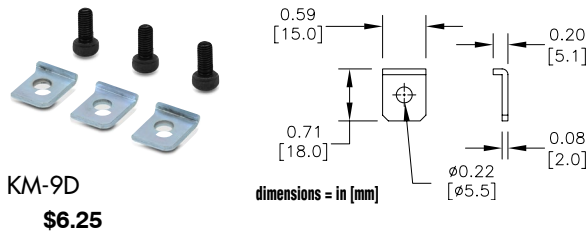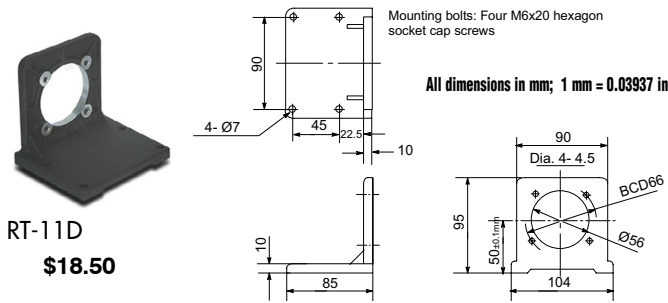


## Dimensions


### External dimensions

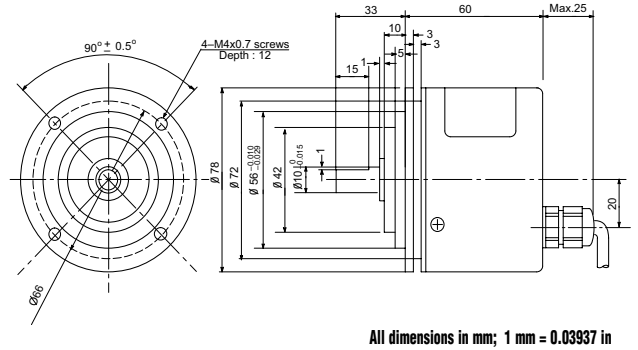

### Servo mounting

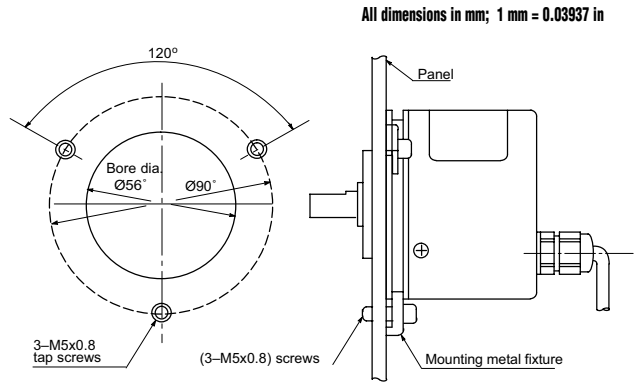

## Wiring diagram

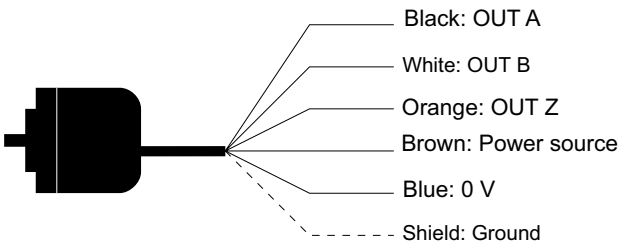

**Cable shield is not connected to the encoder body; enclosure is grounded through the 0V wire.**


## How to read the timing charts

### Totem Pole Models

Out A and Out B are 90 degrees out of phase. Like any quadrature encoder, four unique logic states are created internally to the encoder. This is based on the rising edge to rising edge (one cycle) on channel A or B that indicates one set of bars on the internal encoder disk has passed by the optical sensor.

OUT Z is the absolute reference added to an incremental encoder and is also known as home position. It signifies a full rotation of the encoder shaft.

## Channel timing chart

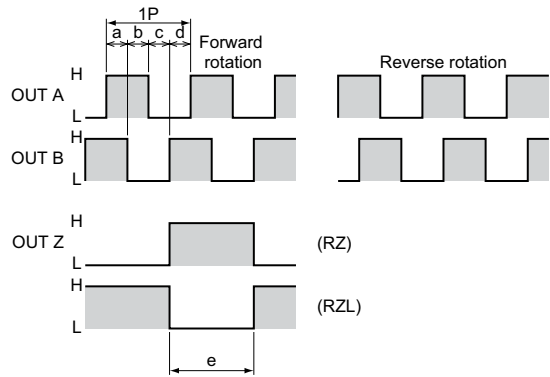


OUT Z generates home position in both directions.

# Encoder Accessories – Couplings

## Encoder Couplings

Couplings provide a connection between solid-shaft encoders and solid shafts. We offer aluminum, fiberglass, and polymer couplings for metric, S.A.E. and metric-to-S.A.E. applications.

### Misalignment compensation




Couplings Selection Guide and Dimensions																
Type	Part Number	Price	Applicable Encoders (shaft size)	Shaft Diameter		D	L	F	C	M	a	E	S	Working Torque	Torsional Rigidity	Material
				d1	d2											
				max			( mm [in] )				( N-m )					
Fiberglass (metric)	GJ-4D	\$9.25	TRD-MX (4mm)	4mm	4mm	13 [0.51]	21 [0.83]	5.3 [0.21]	3 [0.12]	M3 set screw	5°	0.4 [0.02]	0.4 [0.02]	0.6 N-m	6 N-m/rad	Glass-fiber reinforced resin
	GJ-6D	\$7.25	TRD-S (6mm)	6mm	6mm	15 [0.59]	22 [0.87]	5.2 [0.20]	3 [0.12]	M3 set screw	6°	0.5 [0.02]	0.12 [0.005]	0.8 N-m	10 N-m/rad	
	GJ-8D	\$7.25	TRD-N/NA (8mm)	8mm	8mm	19 [0.75]	24 [0.94]	6.8 [0.27]	3.5 [0.14]	M4 set screw	5°	0.5 [0.02]	0.4 [0.016]	1.5 N-m	20 N-m/rad	
	GJ-10D	\$9.50	TRD-GK (10 mm)	10 mm	10 mm	22 [0.87]	26 [1.02]	7.1 [0.28]	4 [0.16]	M4 set screw	5°	0.5 [0.02]	0.12 [0.005]	2.0 N-m	32 N-m/rad	
Fiberglass (SAE)	GJ-635D	\$10.50	TRDA-2E (0.25 in)	0.25 in	0.25 in	15 [0.59]	22 [0.87]	5.2 [0.20]	3 [0.12]	M3 set screw	5°	0.5 [0.02]	0.12 [0.005]	0.8 N-m	10 N-m/rad	Glass-fiber reinforced resin
	GJK-953D	\$15.50	TRDA-20/25 (0.375 in)	0.375 in	0.375 in	25 [0.98]	32 [1.26]	7.3 [0.29]	3.5 [0.14]	M4 set screw	5°	0.5 [0.02]	0.12 [0.005]	2.0 N-m	32 N-m/rad	
Polymer (SAE)	STP-MTRA-SC-1412	\$19.50	TRDA-2E (0.25 in)	0.25 in	0.50 in	25 [0.98]	38 [1.50]	9.9 [0.39]	5.4 [0.21]	M3 cap screw	5°	0.3 [0.01]	0.12 [0.005]	3.7 N-m	0.36 °/lb-in	Engineered polymer
	STP-MTRA-SC-3812	\$19.50	TRDA-20/25 (0.375 in)	0.375 in	0.50 in	25 [0.98]	38 [1.50]	9.9 [0.39]	5.4 [0.21]	M3 cap screw	5°	0.3 [0.01]	0.12 [0.005]	3.7 N-m	0.36 °/lb-in	
Aluminum (metric)	ARM-075-5-4D	\$28.00	TRD-MX (4mm)	4mm	5mm	19.1 [0.75]	19.1 [0.75]	4.6 [0.18]	2.4 [0.09]	M3 set screw	5°	0.25 [0.01]	0.25 [0.01]	2.3 N-m	8.2 N-m/rad	Aluminum alloy
	RU-075D	\$44.00	TRD-S (6mm)	6mm	6mm	19.1 [0.75]	19.1 [0.75]	4.6 [0.18]	2.4 [0.09]	M3 set screw	5°	0.25 [0.01]	0.12 [0.005]	1.0 N-m	8.2 N-m/rad	
	JU-100D	\$40.00	TRD-N/NA (8mm)	8mm	8mm	25.4 [1.00]	25.4 [1.00]	6.6 [0.26]	3.8 [0.15]	M5 set screw	5°	0.25 [0.01]	0.25 [0.01]	1.6 N-m	14.3 N-m/rad	
	RU-100D	\$43.00	TRD-GK (10 mm)	10 mm	10 mm	25.4 [1.00]	25.4 [1.00]	6.6 [0.26]	3.8 [0.15]	M5 set screw	5°	0.25 [0.01]	0.12 [0.005]	1.6 N-m	14.3 N-m/rad	
Aluminum (metric-to-SAE)	ML13P-4-476D	\$28.00	TRD-MX (4mm)	4mm	0.1875 in	13 [0.51]	19 [0.75]	5.5 [0.22]	2.5 [0.10]	M2 set screw	5°	0.4 [0.02]	0.2 [0.01]	0.25 N-m	44 N-m/rad	Aluminum alloy (Bent plate: Polyimide)
	ML16P-4-635D	\$28.00	TRD-MX (4mm) TRDA-2E (0.25 in)	4mm	0.25 in	16 [0.63]	23 [0.91]	7 [0.28]	3 [0.12]	M3 set screw	5°	0.6 [0.02]	0.3 [0.01]	0.4 N-m	70 N-m/rad	
	MCGL16-6-635	\$19.50	TRD-S (6mm) TRDA-2E (0.25 in)	6mm	0.25 in	16 [0.63]	23.2 [0.91]	7 [0.28]	3 [0.12]	M3 set screw	3.5°	0.3 [0.01]	0.3 [0.01]	0.4 N-m	70 N-m/rad	
	MCGL20-8-635	\$27.50	TRD-N/NA (8mm) TRDA-2E (0.25 in)	8mm	0.25 in	20 [0.79]	26 [1.02]	7.5 [0.30]	3.7 [0.15]	M3 set screw	3.5°	0.3 [0.01]	0.4 [0.02]	0.6 N-m	130 N-m/rad	
	MCGL20-8-952	\$27.50	TRD-N/NA (8mm) TRDA-20/25 (0.375 in)	8mm	0.375 in	20 [0.79]	26 [1.02]	7.5 [0.30]	3.7 [0.15]	M3 set screw	3.5°	0.3 [0.01]	0.4 [0.02]	0.6 N-m	130 N-m/rad	
	MCGL25-10-635	\$31.50	TRD-GK (10 mm) TRDA-2E (0.25 in)	10 mm	0.25 in	25 [0.98]	30.2 [1.19]	9 [0.35]	4 [0.16]	M4 set screw	3.5°	0.3 [0.01]	0.5 [0.02]	1.4 N-m	240 N-m/rad	
	MCGL25-10-952	\$31.50	TRD-GK (10 mm) TRDA-20/25 (0.375 in)	10 mm	0.375 in	25 [0.98]	30.2 [1.19]	9 [0.35]	4 [0.16]	M4 set screw	3.5°	0.3 [0.01]	0.5 [0.02]	1.4 N-m	240 N-m/rad	
Aluminum (SAE)	ARM-075-635-635D	\$26.00	TRDA-2E (0.25 in)	0.25 in	0.25 in	19.1 [0.75]	19.1 [0.75]	4.6 [0.18]	2.4 [0.09]	M3 set screw	5°	0.25 [0.01]	0.25 [0.01]	1.0 N-m	8.2 N-m/rad	Aluminum alloy
	ARM-100-9525-9525D	\$28.00	TRDA-20/25 (0.375 in)	0.375 in	0.375 in	25.4 [1.00]	25.4 [1.00]	6.6 [0.26]	3.8 [0.15]	M5 set screw	5°	0.25 [0.01]	0.25 [0.01]	1.6 N-m	14.3 N-m/rad	

\* mm ÷ 25.4 = inches


# Encoder Accessories – Couplings

## Encoder Couplings – Dimensions


**GJ-xxD Fiberglass Couplings (metric) & GJx-xxxD Fiberglass Couplings (SAE)**

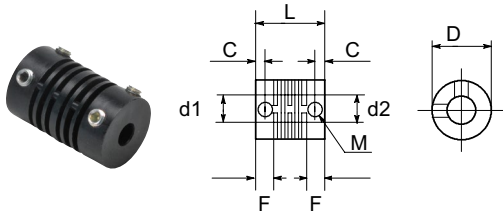


**STP-MTRA-SC-xxxx Polymer Couplings**

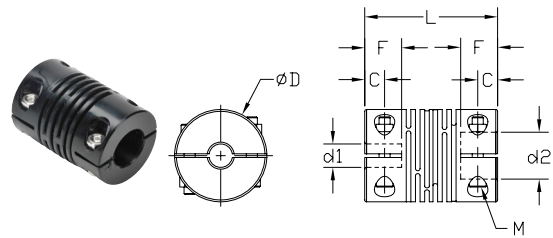


**ARM-xxxxxD Aluminum Couplings (metric & SAE)**

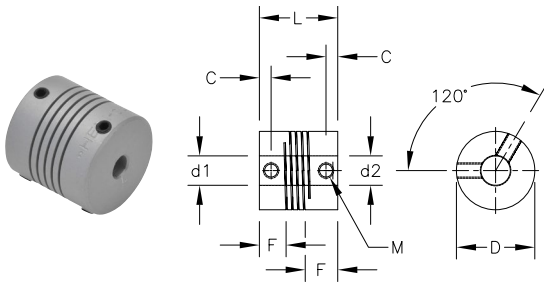

**MCGLxx Aluminum Couplings & ML1xP-4-xxxD Aluminum Couplings**

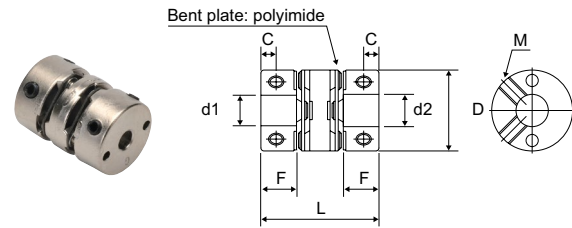

**RU-075D, RU-100D, and JU-100D Aluminum Couplings**

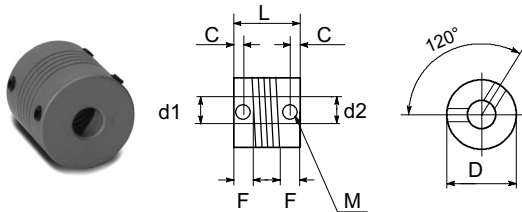

# Great Encoder Selection at Great Prices



## Koyo

Duty	Family	Size	Encoder diameter	Shaft diameter	Solid or Hollow Shaft	Operating Voltage (VDC) and Electrical Output*	IP Rating	Max Radial Load (N)	Max Axial Load (N)	Available resolutions	
Incremental	Light Duty	TRD-MX	10	25mm	4mm	solid	5V Line Driver or 5-12V OC or 12-24V OC	IP50	10	5	100, 360, 500, 1000, 1024
		TRDA-2E	15	1.5"	1/4"	solid	5V Line Driver or 12-24V OC	IP50	30	20	100, 360, 500, 1000, 1024, 2500
		TRD-S	15	38mm	6mm	solid	5V Line Driver or 5-12V OC or 12-24V OC	IP40	20	10	100, 200, 250, 300, 360, 400, 500, 600, 800, 1000, 1024, 1200, 2000, 2500
		TRD-SH	15	38mm	8mm	hollow	5V Line Driver or 5-12V OC or 12-24V OC	IP40	20	10	100, 200, 250, 300, 360, 400, 500, 600, 800, 1000, 1024, 1200, 2000, 2500
	Medium Duty	TRDA-20	20	2"	3/8"	solid	5V Line Driver or 5-30V P/P	IP50	50	30	100, 360, 500, 1000, 1024, 2500
		TRDA-25	25 (w/size 20 body)	2.5" flange (w/ 2.0" body)	3/8"	solid	5V Line Driver or 5-30V P/P	IP65	50	30	100, 360, 500, 1000, 1024, 2500
		TRD-N	20	50mm	8mm	solid	5V Line Driver or 5-30V P/P	IP65	50	30	3, 4, 5, 10, 30, 40, 50, 60, 100, 120, 200, 240, 250, 300, 360, 400, 480, 500, 600, 750, 1000, 1024, 1200, 2000, 2500, 3000, 3600, 5000
	TRD-NH	20	50mm	8mm	hollow	5V Line Driver or 5-30V P/P	IP65	50	30	3, 4, 5, 10, 30, 40, 50, 60, 100, 120, 200, 240, 250, 300, 360, 400, 480, 500, 600, 750, 1000, 1024, 1200, 2000, 2500, 3000, 3600, 5000	
	Heavy Duty	TRD-GK	30	78mm	10mm	solid	10-30V P/P	IP65	100	50	30, 100, 120, 200, 240, 250, 300, 360, 400, 500, 600, 800, 1000, 1200, 1500, 1800, 2000, 2500, 3600, 5000
	Medium Duty Absolute	TRD-NA	20	50mm	8mm	solid	10-30V OC	IP65	50	30	32, 64, 128, 180, 256, 360, 512, 720, 1024, 2048 (Gray code)

All our encoders feature an integral 2m cable except for the TRDA-25 series which has an MS connector

\*Operating Voltage and Electrical Output:  
 • LD = Line Driver (all Line Drivers require 5VDC supply)  
 • OC = NPN Open Collector (at Operating Voltage)  
 • P/P = Push Pull or Totem Pole (at Operating Voltage)

## Accessories

### Couplings

A variety of couplings - metric-to-metric, inch-to-inch (SAE - SAE), and metric-to-inch are in stock, ready to ship.



### Flanges

A collection of flanges that ease encoder mounting. Several models are available with round flanges, square flanges and miscellaneous mounting options.

### Mounting brackets

Simplify your installation with a ready-to-use right-angle mounting bracket for light, medium and heavy-duty encoders



### Cables

For encoders that require a connector cable, we have cables in stock, priced right and ready to ship.