



Truflor® TKM Series Paddle Wheel Liquid Flow Meters



Part No. TKM-25-P

Overview

The Truflor® TKM Series digital in-line flow meter sensors are easy to install with exceptional guaranteed long-life performance. They are highly repeatable, extremely rugged sensors that offer outstanding value and require no scheduled maintenance.

The TKM Series has a process-ready output signal with a wide dynamic flow range of 1 to 32 GPM up to 10.5 to 357 GPM. The sensor measures liquid flow rates in full pipes.

TKM Series flow meters are available from 1/2" to 2" pipe sizes. PVC body construction makes the TKM series highly adaptable and chemically resistant to many corrosive liquid process applications.

The TKM Series flow meter bodies are true-union designed up to 2" just as any true-union ball valve is designed. They come completely pre-programmed with a bright LED Display that rotates 360°.

Features

- Highly adaptable and chemically resistant to many corrosive liquid process applications.
- No Programming and quick installation
- Accuracy: ±0.5%
- Switch, Pulse and 4–20 mA outputs
- Flow and total flow indication
- ShearPro® paddle wheel design
- Low pressure drop
- Password protection security
- 1/2 to 2 inch true union sizes
- M12 quick-disconnect (8-pole M12 cable included)
- Tefzel® paddle wheel material offers superior chemical and wear resistance
- Zirconium ceramic rotor and bushings
- ShearPro® through-pin design: eliminates finger spread, reduces lost paddles, increases temp. rating, 360° housing protects rotor
- NEMA 4X and IP 66 protection



Tefzel Paddle Wheel



- Superior chemical and wear resistance vs PVDF (Polyvinylidene fluoride)

Zirconium Ceramic Rotor | Bushings


- Up to 15x the wear resistance vs regular ceramic
- Integral rotor bushings reduce wear and fatigue stress

ShearPro Through-Pin Design

- Eliminates finger spread
- No lost paddles
- Increased temp. range
- 360° housing protects rotor

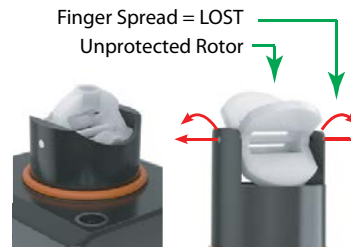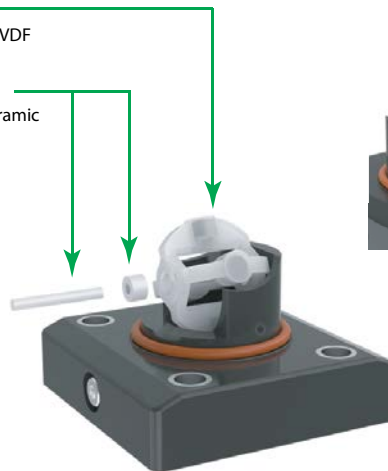

ShearPro® vs. Competitor



ShearPro® vs. Flat Paddle

Truflor Paddle Wheel Liquid Flow Meter Selection										
Part No.	Price	Connection	Flow Range	Output 1	Output 2	Output 3	Quantity	Weight (lbs)	Drawing Link	Manufacturer Quick Start Guide
<u>TKM-15-P</u>	\$1,057.00	1/2" schedule 80 PVC socket	1 to 32 GPM	Switch NPN	Switch or Pulse NPN	Analog 4-20 mA	1	1.4	PDF	PDF
<u>TKM-20-P</u>	\$1,118.00	3/4" schedule 80 PVC socket	1.5 to 45 GPM				1	1.4	PDF	
<u>TKM-25-P</u>	\$1,168.00	1" schedule 80 PVC socket	2.5 to 79 GPM				1	1.5	PDF	
<u>TKM-40-P</u>	\$1,219.00	1-1/2" schedule 80 PVC socket	6.5 to 225 GPM				1	2.3	PDF	
<u>TKM-50-P</u>	\$1,268.00	2" schedule 80 PVC socket	10.5 to 357 GPM				1	2.4	PDF	




Truflo® TKM Series Paddle Wheel Liquid Flow Meters

Truflo Paddle Wheel Liquid Flow Meter Specifications	
General	
Operating Range	1 to 357 GPM
Pipe Size Range	1/2" to 2"
Linearity	±0.5% of F.S @ 25 °C 77 °F
Repeatability	±0.5% of F.S @ 25 °C 77 °F
Wetted Materials	
Sensor Body	PVC
O-Rings	FKM (Fluoro Rubber Material)
Rotor Pin / Bushings	Zirconium Ceramic / ZrO2
Paddle and Rotor	ETFE Tefzel®
Operating Temperature	
PVC	32 to 140 °F (0 to 60 °C)
Max. Pressure Rating Non-Shock	
PVC	180 PSI @ 68 °F 40 Psi @ 140 °F (12.5 Bar @ 20 °C 2.7 Bar @ 60 °C); Refer to pressure/temperature graph
Electrical	
Supply Voltage	10-30 VDC
Outputs	
Frequency	49 Hz per m/s (15 Hz per ft/s) nominal
TKM Series	2 x NPN 4-20 mA
Approvals	
CE RoHS Compliant	



Note: Check the chemical compatibility of the sensor's wetted parts with the medium to be measured.

Wiring Diagram

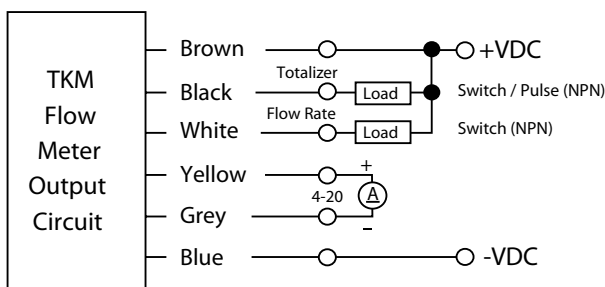

Wire Color	Description
Brown	+ 10 - 30 VDC
Black	Totalizer Pulse/Limit Output (OP2)
White	Flow Rate Limit Output (OP1)
Yellow	4-20 mA out: +
Grey	4-20 mA out: -
Blue	-VDC

Note: M12 quick-disconnect (8-pole M12 cable included)

K-Factor Charts

K-Factors for TK Series	
Size	K-Factor
1/2"	127.6
3/4"	81.8
1"	55.1
1-1/2"	18.8
2"	10.2

Note: K-Factor is Pre-Programmed



Truflo® TKM Series Paddle Wheel Liquid Flow Meters

Min/Max Flow Rates		
Pipe Size (O.D.)	GPM (LPM)	GPM (LPM)
	0.3 m/s min.	10 m/s max.
1/2" DN15	1.0 (3.5)	32 (120)
3/4" DN20	1.5 (5.0)	45 (170)
1" DN25	2.5 (9.0)	79 (300)
1-1/2" DN40	6.5 (25.0)	225 (850)
2" DN50	10.5 (40.0)	357 (1350)

Note: The Pressure/Temperature graph is specifically for the Truflo® Flow Meter Sensors.

During system design the specifications of all components must be considered.

Pressure/Temperature Graph

