

# Roxburgh KMFA Series EMI Filters

## Three-phase Drive Rated EMI Filters - High Performance

The Roxburgh KMFA Series filters are economically priced and specifically designed as a line filter for 230/460 VAC, 3-phase devices. The two-stage design provides good performance for both common mode and differential mode interference and are

rated from 6A to 100A at up to 500V. KMFA high performance three-phase industrial mains filters are designed for all drives applications including servos and AC or DC drives. The filters are designed to be mounted in a cabinet.

### Features

- 230/460 VAC, 0-60 Hz, three-phase
  - 6A - 100A models
  - Rugged metal case
  - Screw terminals
  - Threaded GND lug
  - Lightweight side mounting
  - Panel mount
- \*Filter performance curves are available at [www.AutomationDirect.com](http://www.AutomationDirect.com)

### Applications

- Drives applications
- Electrically noisy applications requiring high filter performance
- Ideally suited for products that must conform to part 15, FCC regulations
- Industrial applications include motor drives and inverters, machine tools, UPS, industrial controls, digital electronics, process controls and mechanical handling equipment, etc.

### Standards and Certifications



KMFA EMI Filters		
Part Number	Price	Description
<b>KMF306A</b>	\$77.00	EMI Input Filter for 3-phase AC drives, 230/460 VAC, 6A
<b>KMF310A</b>	\$78.00	EMI Input Filter for 3-phase AC drives, 230/460 VAC, 10A
<b>KMF318A</b>	\$103.00	EMI Input Filter for 3-phase AC drives, 230/460 VAC, 18A
<b>KMF325A</b>	\$115.00	EMI Input Filter for 3-phase AC drives, 230/460 VAC, 25A
<b>KMF336A</b>	\$134.00	EMI Input Filter for 3-phase AC drives, 230/460 VAC, 36A
<b>KMF350A</b>	\$183.00	EMI Input Filter for 3-phase AC drives, 230/460 VAC, 50A
<b>KMF370A</b>	\$213.00	EMI Input Filter for 3-phase AC drives, 230/460 VAC, 70A
<b>KMF3100A</b>	\$219.00	EMI Input Filter for 3-phase AC drives, 230/460 VAC, 100A



General Specifications	
<b>Voltage Rating</b>	230/460 VAC, 0-60 Hz
<b>Voltage Max.</b>	528V
<b>Voltage Withstand</b>	2900VDC/ 60 secs.
<b>Phase</b>	3
<b>UL/IEC Pollution Class</b>	Degree II
<b>Humidity</b>	93% RH (non-condensing)
<b>Overload Current</b>	135% 2Hrs, 150% 60s
<b>Insulation Resistance</b>	500VDC >3.5M Ohms
<b>Climate Class (IEC 60068-1)</b>	-25/85/21
<b>Temperature Rise</b>	45°C
<b>Temperature Rating</b>	-13 to 185°F, -25 to 85°C
<b>Flammability (UL94)</b>	V-2
<b>Case Material</b>	Aluminum
<b>Altitude*</b>	1000m (3000m with derating)
<b>Mounting Clearance</b>	≥50mm gap
<b>Agency Approvals**</b>	CE (EN 60939-1), cURus: File# E191581 (Standard: UL1283 & C22.2 No.8)

		Temperature Derating Chart above 40°C*								
		Ambient °C								
		40	45	50	55	60	65	70	75	80
Continuous Ampacity at Ambient °C	KMF306A	6.00	5.60	5.19	4.76	4.31	3.82	3.28	2.65	1.86
	KMF310A	10.00	9.34	8.65	7.94	7.18	6.36	5.46	4.42	3.10
	KMF318A	18.00	16.81	15.57	14.29	12.92	11.45	9.83	7.96	5.58
	KMF325A	25.00	23.34	21.63	19.84	17.95	15.91	13.66	11.05	7.75
	KMF336A	26.00	24.28	22.50	20.63	18.66	16.55	14.20	11.50	8.06
	KMF350A	50.00	46.69	43.26	39.68	35.89	31.82	27.31	22.11	15.50
	KMF370A	70.00	65.36	60.56	55.55	50.25	44.55	38.24	30.95	21.70
	KMF3100A	100.00	93.37	86.52	79.36	71.79	63.64	54.63	44.22	31.00

\* NOTE: Using these filters above 40°C would comprise a non-UL application of device.

\* Derate 1% per 100m after 1000m; Max 3000m.

\*\*To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific component part number web page.

# Roxburgh KMFA Series EMI Filters


Specifications											
	Parameter	KMF306A	KMF310A	KMF318A	KMF325A	KMF336A	KMF350A	KMF370A	KMF3100A		
	Max Power, kW (max/ph)	5 (1.4)	8.3 (2.4)	14.9 (4.3)	20.8 (6)	29.9 (8.6)	41.5 (12)	58.1 (16.8)	83 (24)		
	Current Rating (A)	6	10	18	25	36	50	70	100		
	SCCR Rating (kA)	5					10	5	10		
	Ingress Protection	IP20									
GND Terminal	Terminal Style	M5x15 Stud (SS)				M6x20 Stud (SS)	M8x23 Stud (SS)				
	Torque, lb-in (N-m)	17.7 (2)				35.4 (4)	53.1 (6)				
	Ring Terminal Size	M5 (#10)				M6 (1/4)	M8 (5/16)				
Wire Terminal	Terminal Style	Screw									
	Torque, lb-in (N-m)	7 (0.8)			17.7 (2)			44.2 (5)			
	Max Wire Gauge (AWG)	10			8			2			
	Operational Leakage Current (mA)	7.2	6.8	7.2	13.5	17.6	22.8	21.4	30.6		
	Total Resistance (Line to Load) (mΩ/ph)	33	14	11.4	4.2	4.12	2.1	1.3	0.96		
	Residual Voltage (V@5s)	204V@5s	116V@5s	204V@5s	204V@5s	463V@5s	463V@5s	544V@5s	544V@5s		
	Heat Dissipation (W/ph)	1.2	1.4	3.7	2.6	5.34	5.25	6.4	9.6		
	Weight lbs (kg)	1.5 (0.7)	1.7 (0.8)	2.7 (1.25)	3.59 (1.63)	4.2 (1.9)	7.3 (3.3)	8.6 (3.9)	9 (4.1)		

# Roxburgh KMFA Series EMI Filters

## Dimensions


mm [inches]

**KMF306A**  
**KMF310A**  
**KMF318A**  
**KMF325A**

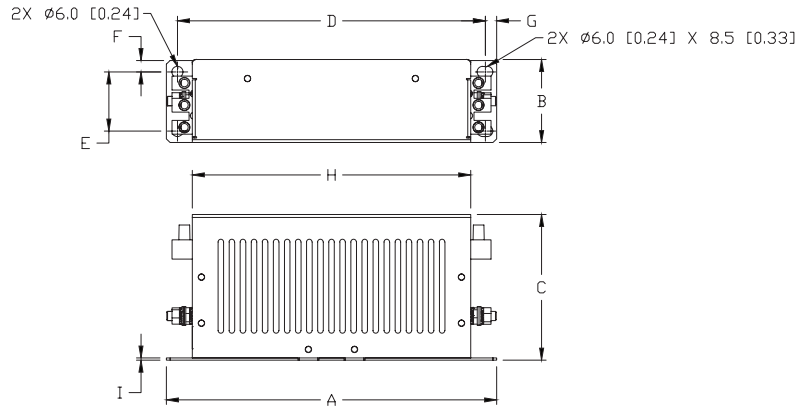

PART NUMBER	A	B	C	D	E	F	G	H	I
KMF306A	179.0 [7.04]	45.0 [1.77]	79.0 [3.11]	167.0 [6.57]	32.0 [1.26]	6.3 [0.25]	6.3 [0.25]	151.0 [5.94]	1.2 [0.05]
KMF310A	179.0 [7.04]	45.0 [1.77]	79.0 [3.11]	167.0 [6.57]	32.0 [1.26]	6.3 [0.25]	6.3 [0.25]	151.0 [5.94]	1.2 [0.05]
KMF318A	229.0 [9.01]	55.2 [2.17]	115.5 [4.55]	217.0 [8.54]	42.0 [1.65]	5.6 [0.22]	6.0 [0.24]	201.0 [7.91]	1.2 [0.05]
KMF325A	229.0 [9.01]	55.2 [2.17]	115.5 [4.55]	217.0 [8.54]	42.0 [1.65]	5.6 [0.22]	6.0 [0.24]	201.0 [7.91]	1.2 [0.05]

**KMF336A**  
**KMF350A**  
**KMF370A**  
**KMF3100A**

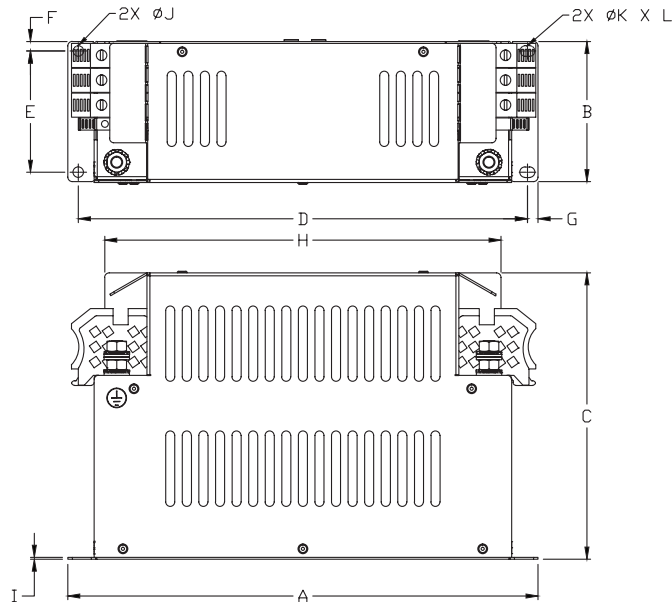

PART NUMBER	A	B	C	D	E	F	G	H	I	ØJ	ØK	L
KMF336A	269.0 [10.59]	73.2 [2.88]	162.2 [6.38]	258.0 [10.15]	60.0 [2.36]	5.9 [0.23]	7.0 [0.28]	226.0 [8.89]	1.2 [0.05]	6.5 [0.26]	6.5 [0.26]	9.5 [0.37]
KMF350A	312.0 [12.28]	93.5 [3.68]	190.0 [7.48]	298.0 [11.73]	79.0 [3.11]	7.8 [0.31]	7.0 [0.28]	263.0 [10.35]	1.2 [0.05]	7.0 [0.28]	7.0 [0.28]	10.0 [0.39]
KMF370A	312.0 [12.28]	93.5 [3.68]	190.0 [7.48]	298.0 [11.73]	79.0 [3.11]	7.8 [0.31]	7.0 [0.28]	263.0 [10.35]	1.2 [0.05]	7.0 [0.28]	7.0 [0.28]	10.0 [0.39]
KMF3100A	312.0 [12.28]	93.5 [3.68]	190.0 [7.48]	298.0 [11.73]	79.0 [3.11]	7.8 [0.31]	7.0 [0.28]	263.0 [10.35]	1.2 [0.05]	7.0 [0.28]	7.0 [0.28]	10.0 [0.39]