

General Accessories for AC Drives

Drives Accessories – Line/Load Reactors

LR(2) Series Line Reactors

Input line reactors protect the AC drive from transient overvoltage conditions typically caused by utility capacitor switching. They also reduce the harmonics associated with AC drives and are recommended for all installations.

Output line (load) reactors protect the motor insulation against AC drive short circuits and IGBT reflective wave damage, and also allow the motor to run cooler by “smoothing” the motor current waveform. They are recommended for operating “non-inverter-duty” motors, and for any motors where the length of wiring between the AC drive and motor is less than 100 feet. For AC Drive-to-Motor wiring distances over 100 feet, use of the VTF series output filter is recommended.

Features:

- Universal mounting feet with multiple mounting slots; can replace most reactors using existing mounting holes
- Short-term overload rating: 200% of rated current for 3 minutes maximum
- Overload inductance:
95% @ 110% load; 80% @ 150% load
- Impedance: ~3%
- 10-year warranty

Agency Approvals:

- cULUS listed (E197592)
- CE marked
- RoHS



LR2-10P2-1PH




LR-2100



LR2-40P2

Typical Line Reactors

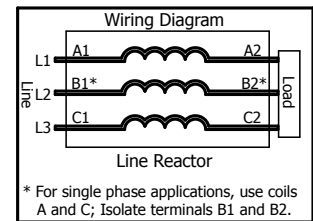

Wiring

LR(2) Series Line/Load Reactors – Compatibility with AutomationDirect AC Drives

- For Reactor compatibility with CFW100 AC Drives, please refer to WEG CFW100 AC Drives - Accessories: [PDF](#).
- For Reactor compatibility with CFW300 AC Drives, please refer to WEG CFW300 AC Drives - Accessories: [PDF](#).
- For Reactor compatibility with CFW500 AC Drives, please refer to WEG CFW300 AC Drives - Accessories: [PDF](#).
- For Reactor compatibility with GS4 AC Drives, please refer to GS4 DURApulse Drives Accessories - Line/Load Reactors: [PDF](#).
- For Reactor compatibility with GS20(X) AC Drives, please refer to GS20(X) Optional Accessories - Line Reactors/VTF Filters: [PDF](#).
- For Reactor compatibility with GS30 AC Drives, please refer to GS20 Optional Accessories - Line Reactors/VTF Filters: [PDF](#).
- For Reactor compatibility with AS3 AC Drives, please refer to AS3 Optional Accessories - Line Reactors/VTF Filters: [PDF](#).

Drives Accessories – Line/Load Reactors

Line/Load Reactors for AC Drives – LR(2) Series																						
Part Number ¹	Price	Max Rated Amps	Induc- tance [mH]	Watt Loss	System Voltage	Weight (lb)	Wire Range	Terminal Torque (lb-in)	Operating Temperature	Storage Temperature	Environment	Drawing Links										
LR2-10P2-1PH-A³⁴	\$87.00	10A	1.37	27	110 VAC	1.4	18-12 AWG	10	180°C / 356°F	-40 – 104 °F [-40 – 40 °C]	Humidity: 95% Non-condensing	PDF										
LR2-10P5-1PH-A³⁴	\$102.00	12A	0.971	42		4.3	18–12 AWG	20	104°F [40°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF										
LR-22P0-1PH³	\$86.00		1.53	24.3					PDF													
LR2-11P0-1PH²³	\$207.00		16.7A	1.03		53			8			18–4 AWG	-40 – 104 °F [-40 – 40 °C]	PDF								
LR2-11P5-1PH³	\$221.00	34A	0.342	64		12	PDF															
LR2-20P2⁴	\$83.00	3A	7.4	26.4	230 VAC	1.4	22–12 AWG	9	122°F [50°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF										
LR2-20P2-1PH³⁴	\$84.00	3.4A	6.4	23.5								PDF										
LR2-20P5⁴	\$100.00	4.8A	4.6	30.6								PDF										
LR2-20P5-1PH³⁴	\$100.00	6.2A	3.56	39		3						22–12 AWG	9	122°F [50°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF					
LR2-20P7⁴	\$102.00	7.6A	2.9	49													PDF					
LR2-21P0⁴	\$114.00	11A	2	64		3.2											18-12 AWG	10	180°C / 356°F	-40 – 104 °F [-40 – 40 °C]	Humidity: 95% Non-condensing	PDF
LR2-21P5⁴	\$114.00																					PDF
LR2-22P0⁴	\$115.00											PDF										
LR2-21P0-1PH-A³⁴	\$112.00	11.6A	0.2				PDF															
LR2-21P5-1PH-A³⁴	\$114.00						PDF															
LR2-23P0⁴	\$102.00	12A	0.971	42		1.4	18–4 AWG	20	104°F [40°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF										
LR2-22P0-1PH²³⁴	\$202.00	16.7A	1.03	53								PDF										
LR-25P0	\$194.00		0.626	48								PDF										
LR2-23P0-1PH³⁴	\$124.00	19A		38		230 VAC			8	18-4 AWG	20	180°C / 356°F	-40 – 104 °F [-40 – 40 °C]	Humidity: 95% Non-condensing	PDF							
LR-27P5	\$206.00	24.2A	0.434	65			12	18–4 AWG		20		104°F [40°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF							
LR-2010	\$242.00	30.8A	0.342	96					PDF													
LR-2015	\$285.00	46.2A	0.22	64					PDF													
LR-2020	\$312.00	59.4A	0.172	85					PDF													
LR-2025	\$460.00	74.8A	0.138	94			15	18–16 AWG: 25 14–6 AWG: 30 4 AWG: 35	PDF													
LR-2030	\$490.00	88A	0.116	135			33	6AWG–2/0 (AL or CU)	120	PDF												
LR-2040	\$574.00	114A	0.0886	149						PDF												
LR-2050	\$670.00	143A	0.0699	154			36	6AWG– 250kcmil (AL or CU)	275	PDF												
LR-2060	\$745.00	169A	0.0624	209						46	6AWG– 250MCM				PDF							
LR-2075	\$766.00	211A	0.0487	294			52	4AWG– 600MCM	500	PDF												
LR-2100	\$843.00	273A	0.0364	276						PDF												

1. Impedance = 3% for all reactors, except as otherwise noted.

2. Impedance = 5% for reactors marked with this note, but they function as 3% reactors in the ADC drive application.

3. Single-phase line reactors are for use only with single-phase drive inputs. Single-phase line reactors should NOT be installed on the output side of AC drives.

4. Optional mounting accessories are available for these models. See "Line/Load Reactors – Mounting Accessories" section for details.

5. LR-4250 & LR-4300 have dual-connector lugs, and will require multiple conductors per phase of the appropriate size to fit the lugs.

Drives Accessories – Line/Load Reactors

Line/Load Reactors for AC Drives – LR(2) Series																										
Part Number ¹	Price	Max Rated Amps	Inductance [mH]	Watt Loss	System Voltage	Weight (lb)	Wire Range	Terminal Torque (lb-in)	Operating Temperature	Storage Temperature	Environment	Drawing Links														
LR2-40P2⁴	\$60.00	0.7A	31.5	5	460 VAC	1.3	22–12 AWG	9	122°F [50°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF														
LR2-40P3⁴	\$66.00	0.8A	27.6	6.2								PDF														
LR2-40P5⁴	\$67.00	1.1A	20	9.7								PDF														
LR2-40P7⁴	\$67.00	1.6A	13.8	12.1								PDF														
LR2-41P0⁴	\$68.00	2.1A	10.5	25.2		1.2						22–12 AWG	9	122°F [50°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF									
LR2-41P5⁴	\$82.00	3A	7.4	26.4													PDF									
LR2-42P0⁴	\$83.00	3.4A	6.5	23.5													PDF									
LR2-43P0⁴	\$99.00	4.8A	4.6	30.6													PDF									
LR2-44P0⁴	\$101.00	6.2A	3.56	39		3											22–12 AWG	9	122°F [50°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF				
LR2-45P0⁴	\$101.00	7.6A	2.9	49																		PDF				
LR2-47P5⁴	\$115.00	11A	2	64																		PDF				
LR2-4010⁴	\$116.00	14A	1.58	77.7			3.3	18-12 AWG	10	180°C / 356°F	-40 – 104 °F [-40 – 40 °C]											Humidity: 95% Non-condensing	PDF			
LR-4015	\$237.00	21A	0.912	65		8	18–4 AWG	20	104°F [40°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases											PDF				
LR-4020	\$276.00	27A	0.694	79																		PDF				
LR-4025	\$290.00	34A	0.569	96																		10	22–16 AWG: 25 14–6 AWG: 30 4 AWG: 35	104°F [40°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases
LR-4030	\$347.00	40A	0.469	105								PDF														
LR-4040	\$382.00	52A	0.387	114		22–16 AWG: 25 14–6 AWG: 30 4 AWG: 35						104°F [40°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF											
LR-4050	\$448.00	65A	0.295												25	#22–4 AWG										
LR-4060	\$462.00	77A	0.227												169	33						2/0 – 6AWG (AL or CU)				
LR-4075	\$700.00	96A	0.196												193	46	250kcmil – 6AWG (AL or CU)	275	104°F [40°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases	PDF				
LR-4100	\$840.00	124A	0.152	225											PDF											
LR-4125	\$962.00	156A	0.117	254											PDF											
LR-4150	\$1,114.00	180A	0.103	299											PDF											
LR-4200	\$1,238.00	240A	0.0839	280			74	(1) 4 AWG – 600kcmil (2) 1/0 – 250kcmil (2)** 4 AWG – 350kcmil (AL or CU)	500	104°F [40°C] max	-40 – 149 °F [-40 – 65 °C]				NEMA: open IP00 no corrosive gases	PDF										
LR-4250⁵	\$1,403.00	302A	0.0654	337												PDF										
LR-4300⁵	\$1,546.00	361A	0.0565	381												PDF										
LR2-51P0⁴	\$80.00	1.7A	16.2	16.2	600 VAC											1.3						22–12 AWG	9	122°F [50°C] max	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases
LR2-51P5⁴	\$96.00	2.4A	11.5	17.2		1.4	PDF																			
LR2-52P0⁴	\$97.00	2.7A	10.2	20.5		1.5	PDF																			
LR2-53P0⁴	\$99.00	3.9A	7.07	30		3.5	PDF																			
LR2-54P0⁴	\$105.00	4.9A	5.63			2.9	PDF																			
LR2-55P0⁴	\$113.00	6.1A	4.52			44	3					PDF														
LR2-57P5⁴	\$113.00	9A	3.1			57	3.2					PDF														
LR2-5010⁴	\$115.00	11A	2.454	52.6			18-12 AWG					10	180°C / 356°F	-40 – 104 °F [-40 – 40 °C]		Humidity: 95% Non-condensing	PDF									

1. Impedence = 3% for all reactors, except as otherwise noted.

2. Impedence = 5% for reactors marked with this note, but they function as 3% reactors in the ADC drive application.

3. Single-phase line reactors are for use only with single-phase drive inputs. Single-phase line reactors should NOT be installed on the output side of AC drives.

4. Optional mounting accessories are available for these models. See "Line/Load Reactors – Mounting Accessories" section for details.

5. LR-4250 & LR-4300 have dual-connector lugs, and will require multiple conductors per phase of the appropriate size to fit the lugs.

Drives Accessories – Line/Load Reactor Mounting Accessories

LR(2) Series Line/Load Reactors – Mounting Accessories

LR(2) series reactors have different mounting options depending on the model. The models listed below have an integral two-bolt mounting method, and also offer optional mounting adapters that allow other mounting methods.

Adapter Plate Kits LR2-AP1 and LR2-AP2 allow for universal panel mounting with these models.

DIN Rail Mounting Kits LR2-DR1 and LR2-DR2 allow DIN rail mounting with these models.

LR2 Series Line Reactor Mounting Adapters			
Part Number	Price	Description	Drawing Links
LR2-AP1	\$25.00	Adapter Plate Kit; includes 2 flange nuts (10-32); Dimensions 4.45" x 2.63"	PDF
LR2-AP2	\$25.00	Adapter Plate Kit; includes 2 flange nuts (10-32); Dimensions 4.45" x 3.51"	PDF
LR2-DR1	\$25.00	DIN Rail Mounting Clips and Hardware Kit; includes 2 screws (M5-0.8 x 8mm), 2 washers, 2 clips	PDF
LR2-DR2	\$38.00	DIN Rail Mounting Plate and Hardware Kit; includes 4 bolts (0.25-20 x 0.50) and 4 flange nuts	PDF



[LR2-AP1](#)



[LR2-AP2](#)



[LR2-DR1](#)



[LR2-DR2](#)

LR2 Line Reactor Mounting Adapter Selection Table				
ADC Line Reactor Part #	Adapter Plate Kits Part #		DIN Rail Mount Kits Part #	
	LR2-AP1	LR2-AP2	LR2-DR1	LR2-DR2
LR2-10P2-1PH-A	•	•	•	
LR2-10P5-1PH-A				•
LR2-20P2	•	•	•	
LR2-20P2-1PH	•	•	•	
LR2-20P5	•	•	•	
LR2-20P5-1PH				•
LR2-20P7				•
LR2-21P0				•
LR2-21P5				•
LR2-22P0				•
LR2-21P0-1PH-A				•
LR2-21P5-1PH-A				•
LR2-23P0				•
LR2-4010				•
LR2-40P2	•	•	•	
LR2-40P3	•	•	•	
LR2-40P5	•	•	•	
LR2-40P7	•	•	•	
LR2-41P0	•	•	•	
LR2-41P5	•	•	•	
LR2-42P0	•	•	•	
LR2-43P0	•	•	•	
LR2-44P0				•
LR2-45P0				•
LR2-47P5				•
LR2-51P0	•	•	•	
LR2-51P5	•	•	•	
LR2-52P0	•	•	•	
LR2-53P0				•
LR2-54P0				•
LR2-55P0				•
LR2-57P5				•
LR2-5010				•

Drives Accessories – Line/Load Reactors One Line



Line/Load Reactors for AC Drives – Generic One-Line Wiring Examples




WARNING: CONSULT THE APPLICABLE DRIVE USER MANUAL BEFORE ACTUALLY WIRING THE DRIVE!

Input side of the drive

When installed on the input side of the AC drive, line reactors will reduce line notching, as well as limit current and voltage spikes and surges from the incoming line. The line reactor will also reduce harmonic distortion from the drive onto the line. Units are installed in front of the AC drive as shown.

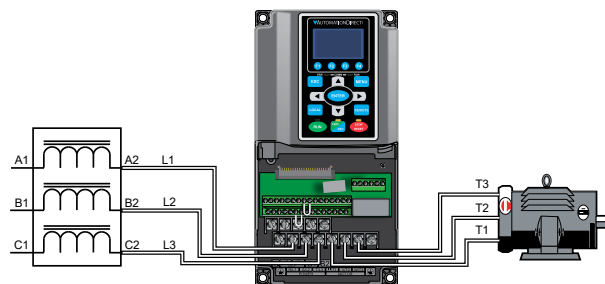

Note: Single-phase line reactors should NOT be installed on the output of the AC drive. Use only three-phase reactors on drive outputs, and only for three-phase motors.

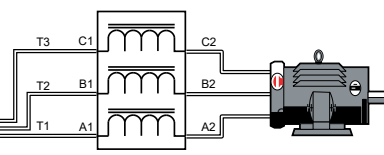




Output side of the drive

When installed on the output side of the drive, line reactors protect the drive from short circuits at the load. Voltage and current waveforms from the drive are enhanced, reducing motor overheating and noise emissions.

Note: If installing a line reactor on the output side of the drive, especially with motor lead lengths in excess of 75 feet, lower the drive PWM output carrier frequency to 4kHz in order to protect the line reactor from excess heating and possible damage.

Multiple drives

Individual line reactors are recommended when installing multiple drives on the same power line. Individual line reactors eliminate crosstalk between multiple drives and provide isolated protection for each drive for its own specific load.

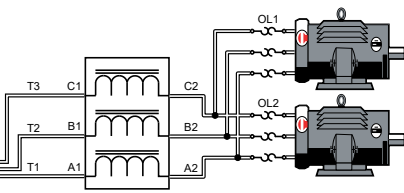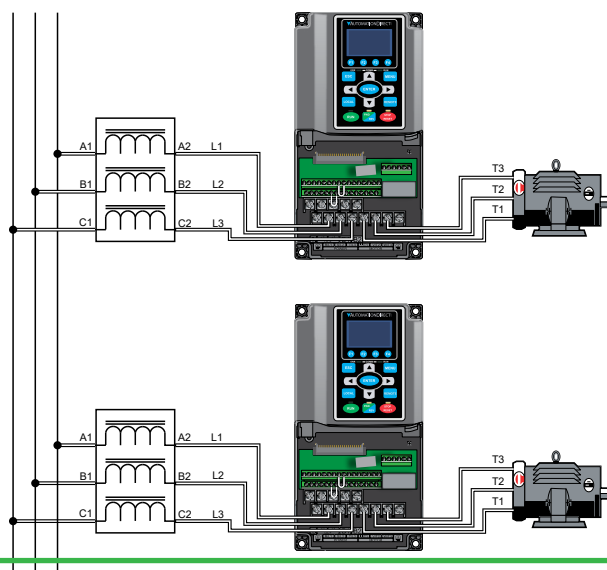

Multiple motors

A single reactor can be used for multiple motors on the same drive, if the motors operate simultaneously. Size the reactor based upon the total horsepower of all the motors. Select a reactor with a current rating greater than the sum of the motor full-load currents. Separate thermal overloads for each motor are recommended for use in multi-motor applications.


Note: A single reactor should be used with multiple motors only when the motors will always operate simultaneously.

Single-phase applications

Some of the line reactors are listed for use with single-phase input power. Make sure that terminals B1 and B2, if present, are properly insulated before any connections are made.



WARNING: ENSURE THAT TERMINALS B1 AND B2 ARE PROPERLY INSULATED BEFORE MAKING ANY CONNECTIONS TO SINGLE-PHASE POWER.

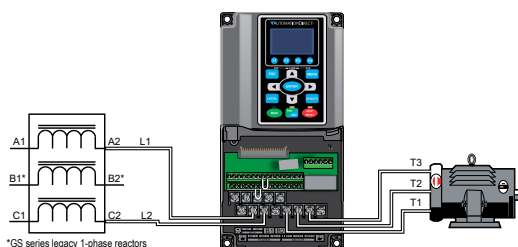

*GS series legacy 1-phase reactors include a B-phase winding.
*LR series 1-phase reactors do not include a B-phase winding.

GS/DURAPULSE Drives Accessories – Line/Load Reactors

Line/Load Reactors for GS/DURAPULSE AC Drives – Additional Specifications

Line Reactors – LR Series – Additional Specifications							
Part Number	Price	Product Weight	Wire Range	Terminal Torque	Temperature Range		Environment
					Operating	Storage	
<u>LR-20P5</u>	Retired	4.0 lb [1.8 kg]	#12–#18 AWG	10 lb·in	-40 – 104 °F [-40 – 40 °C]	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases
<u>LR-21P0-1PH</u>	\$78.00	2.8 lb [1.3 kg]	#12–#18 AWG	10 lb·in			
<u>LR-22P0-1PH</u>	\$86.00	4.3 lb [2.0 kg]	#12–#18 AWG	20 lb·in			
<u>LR-23P0-1PH</u>	Retired	4.3 lb [2.0 kg]	#12–#18 AWG	20 lb·in			
<u>LR-23P0</u>	Retired	4.0 lb [1.8 kg]	#12–#18 AWG	10 lb·in			
<u>LR-25P0</u>	\$194.00	8.0 lb [3.6 kg]	#18–#4 AWG	20 lb·in			
<u>LR-27P5</u>	\$206.00	8.0 lb [3.6 kg]	#18–#4 AWG	20 lb·in			
<u>LR-2010</u>	\$242.00	12 lb [5.4 kg]	#18–#4 AWG	20 lb·in			
<u>LR-2015</u>	\$285.00	12 lb [5.4 kg]	#18–#4 AWG	20 lb·in			
<u>LR-2020</u>	\$312.00	12 lb [5.4 kg]	#18–#4 AWG	20 lb·in			
<u>LR-2025</u>	\$460.00	15 lb [6.8 kg]	#18–#4 AWG	#18–#16 AWG: 25 lb·in #14–#6 AWG: 30 lb·in #4 AWG: 35 lb·in			
<u>LR-2030</u>	\$490.00	33 lb [15 kg]	2/0 – #6AWG (AL or CU)	120			
<u>LR-2040</u>	\$574.00	33 lb [15 kg]	2/0 – #6AWG (AL or CU)	120			
<u>LR-2050</u>	\$670.00	36 lb [16 kg]	250kcmil – #6AWG (AL or CU)	275			
<u>LR-4010</u>	Retired	4.0 lb [1.8 kg]	#12–#18 AWG	10 lb·in			
<u>LR-4015</u>	\$237.00	8.0 lb [3.6 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4020</u>	\$276.00	8.0 lb [3.6 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4025</u>	\$290.00	10 lb [4.5 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4030</u>	\$347.00	10 lb [4.5 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4040</u>	\$382.00	15 lb [6.8 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4050</u>	\$448.00	25 lb [11 kg]	#22–#4 AWG	#22–#16 AWG: 25 lb·in #14–#6 AWG: 30 lb·in #4 AWG: 35 lb·in			
<u>LR-4060</u>	\$462.00						
<u>LR-4075</u>	\$700.00	33 lb [15 kg]	2/0 – #6AWG (AL or CU)	120 lb·in			
<u>LR-4100</u>	\$840.00	46 lb [21 kg]	250kcmil – #6AWG (AL or CU)	275 lb·in			
<u>LR-4125</u>	\$962.00	46 lb [21 kg]	250kcmil – #6AWG (AL or CU)	275 lb·in			
<u>LR-4150</u>	\$1,114.00	46 lb [21 kg]	250kcmil – #6AWG (AL or CU)	275 lb·in			
<u>LR-4200</u>	\$1,238.00	74 lb [34 kg]	(1) 600kcmil – #4 AWG (2) 250kcmil – 1/0	500 lb·in			
<u>LR-4250</u>	\$1,403.00	74 lb [34 kg]	(2)* 350kcmil – #4 AWG (AL or CU)	275 lb·in			
<u>LR-4300</u>	\$1,546.00	74 lb [34 kg]	(2)* 350kcmil – #4 AWG (AL or CU)	275 lb·in			
<u>LR-5010</u>	Retired	4.0 lb [1.8 kg]	#12–#18 AWG	10 lb·in			

* LR-4250 & LR-4300 have dual-connector lugs, and will require multiple conductors per phase of the appropriate size to fit the lugs.