


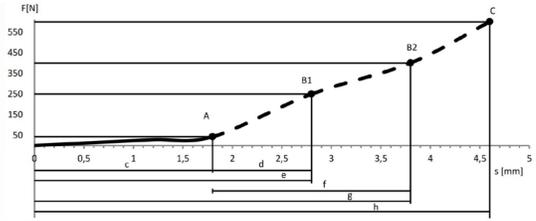
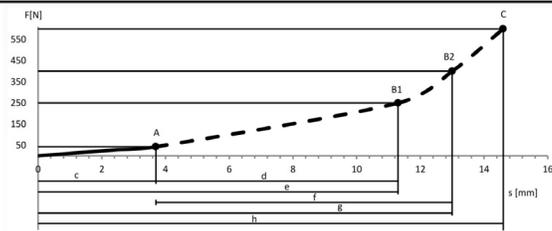
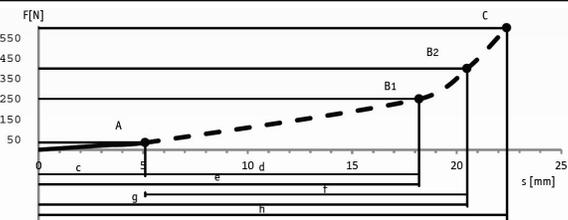
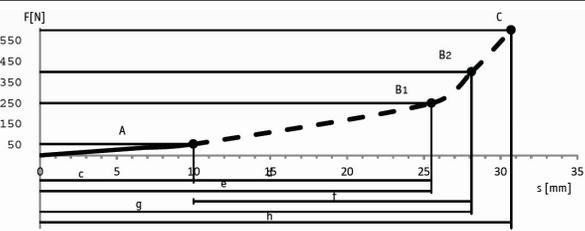
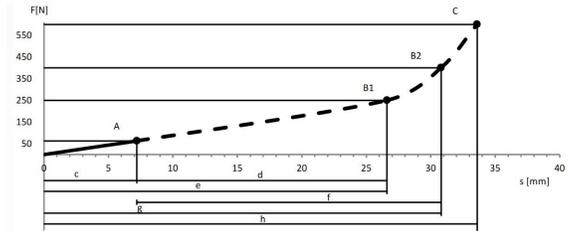
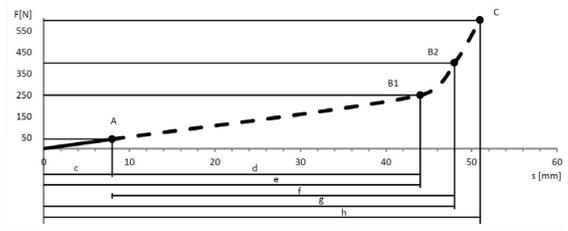
# ASO Safety Solutions

## SENTIR Edges

### Selecting the Edge Profile

ASO Safety Solutions offers several sizes of safety edges to fit most applications, including automatic gate, door, and machine applications. The size (profile) of the edge should be selected based on the application and overtravel permitted by the profile. If the edge experiences overtravel beyond the allowed amount, damage may occur. An additional important deciding factor to consider when determining which profile to use is sensitivity. Sensitivity is the amount of force required to activate the unit.

Where greater actuating forces or overtravel requirements are needed, a safety bumper may be the preferred approach.

Profile Series	Test Speed (10 mm/sec [0.4 in/sec])*		Tested according to DIN EN ISO 13856-2, Test Unit round 80mm, Actuating Point C3, Temp 20 °C
<b>15 x 10mm</b> [0.6 in x 0.4in] 	Force (F) Required for Actuation (A)	42.9N [9.64 lbf]	
	Actuation Distance c	1.8mm [0.07in]	
	Overtravel Distance d to 250 N	1.0mm [0.04in]	
	Overtravel Distance f to 400 N	2.0mm [0.08in]	
	Overtravel Distance h-c to 600 N	2.8mm [0.11in]	
<b>15 x 25mm</b> [0.6 x 1.0in] 	Force (F) Required for Actuation (A)	43N [9.67 lbf]	
	Actuation Distance c	3.7mm [0.15in]	
	Overtravel Distance d to 250 N	7.6mm [0.30in]	
	Overtravel Distance f to 400 N	9.3mm [0.37in]	
	Overtravel Distance h-c to 600 N	10.9mm [0.43in]	
<b>25 x 30mm</b> [1.0 x 1.2in] 	Force (F) Required for Actuation (A)	35N [7.87 lbf]	
	Actuation Distance c	5.1mm [0.20in]	
	Overtravel Distance d to 250 N	13.1mm [0.52in]	
	Overtravel Distance f to 400 N	15.4mm [0.61in]	
	Overtravel Distance h-c to 600 N	17.3mm [0.68in]	
<b>25 x 30mm</b> [1.0 x 1.2in] 	Force (F) Required for Actuation (A)	54.3N [12.21 lbf]	
	Actuation Distance c	10.0mm [0.39in]	
	Overtravel Distance d to 250 N	15.5mm [0.61in]	
	Overtravel Distance f to 400 N	18.1mm [0.71in]	
	Overtravel Distance h-c to 600 N	20.7mm [0.81in]	
<b>25 x 45mm</b> [1.0 x 1.8in] 	Force (F) Required for Actuation (A)	63.1N [14.19 lbf]	
	Actuation Distance c	7.2mm [0.28in]	
	Overtravel Distance d to 250 N	19.4mm [0.76in]	
	Overtravel Distance f to 400 N	23.6mm [0.93in]	
	Overtravel Distance h-c to 600 N	26.4mm [1.04in]	
<b>30 x 70mm</b> [1.2 x 2.8in] 	Force (F) Required for Actuation (A)	44N [9.89 lbf]	
	Actuation Distance c	8.0mm [0.31in]	
	Overtravel Distance d to 250 N	36.0mm [1.42in]	
	Overtravel Distance f to 400 N	40.0mm [1.57in]	
	Overtravel Distance h-c to 600 N	43.0mm [1.69in]	


\* For other speed data, please refer to product data sheets.

# ASO Safety Solutions

## 15 x 25mm SENTIR Edges and End Caps




**1502-4730**



The SENTIR edge safety contact edges of ASO Safety Solutions are pressure-sensitive sensors applied to ensure the safety of closing edges at possible crushing or shearing points which are prone to accidents. They may be installed near automatic gates, machines and other facilities for handling equipment or moving stage elements in order to protect individuals from bodily harm or machinery from damage.

### Features

- Optimized material properties guarantee fast switching results
- 2 edge lengths available that can be easily cut to fit any application
- Can wire in 2-wire or 4-wire circuits
- Mounting rails included



Use pins 1 and 3 for continuity.  
(See safety relay for wiring)



**1804-3731**

ASO Safety Contact Edges – 15 x 25mm						
Part Number	Price	Profile	Length	End Caps	Aluminum Mounting Rail	Drawing
<b>1502-4730</b>		15 x 25mm [0.59 x 0.98in]	2.0ft	End caps not included; choose from table below	Included	<a href="#">PDF</a>
<b>1502-4731</b>			5.0ft			<a href="#">PDF</a>



**1804-3741**

ASO Safety Contact Edge End Caps – 15 x 25mm				
Part Number	Price	Description	Connection	Drawing
<b>1804-3730*</b>		Safety contact edge end cap	3-pin female M8 connector 1.65ft [0.5m] cable length	<a href="#">PDF</a>
<b>1804-3740*</b>		Safety contact edge end cap	3-pin male M8 connector 1.65ft [0.5m] cable length	<a href="#">PDF</a>
<b>1804-3720*</b>		Terminating resistor end cap: 8.2 KΩ for 15mm x 25mm safety contact edge	NA	<a href="#">PDF</a>
<b>1804-3731</b>		Safety contact edge end cap	3-pin female M8 connector 1.65ft [0.5m] cable length	<a href="#">PDF</a>
<b>1804-3741</b>		Safety contact edge end cap	3-pin male M8 connector 1.65ft [0.5m] cable length	<a href="#">PDF</a>
<b>1804-3721</b>		Terminating resistor end cap: 8.2 KΩ for 15 x 25mm safety contact edge	NA	<a href="#">PDF</a>

\* Products will be discontinued once out of stock.



**1804-3721**

ASO Safety Solutions Industrial Shears				
Part Number	Price	Description	Use With	Contents
<b>9501-0160</b>		Stainless steel industrial shears	Safety contact edges	1 shear



**9501-0160**

# ASO Safety Solutions

## 15 x 25mm SENTIR Edges and End Caps

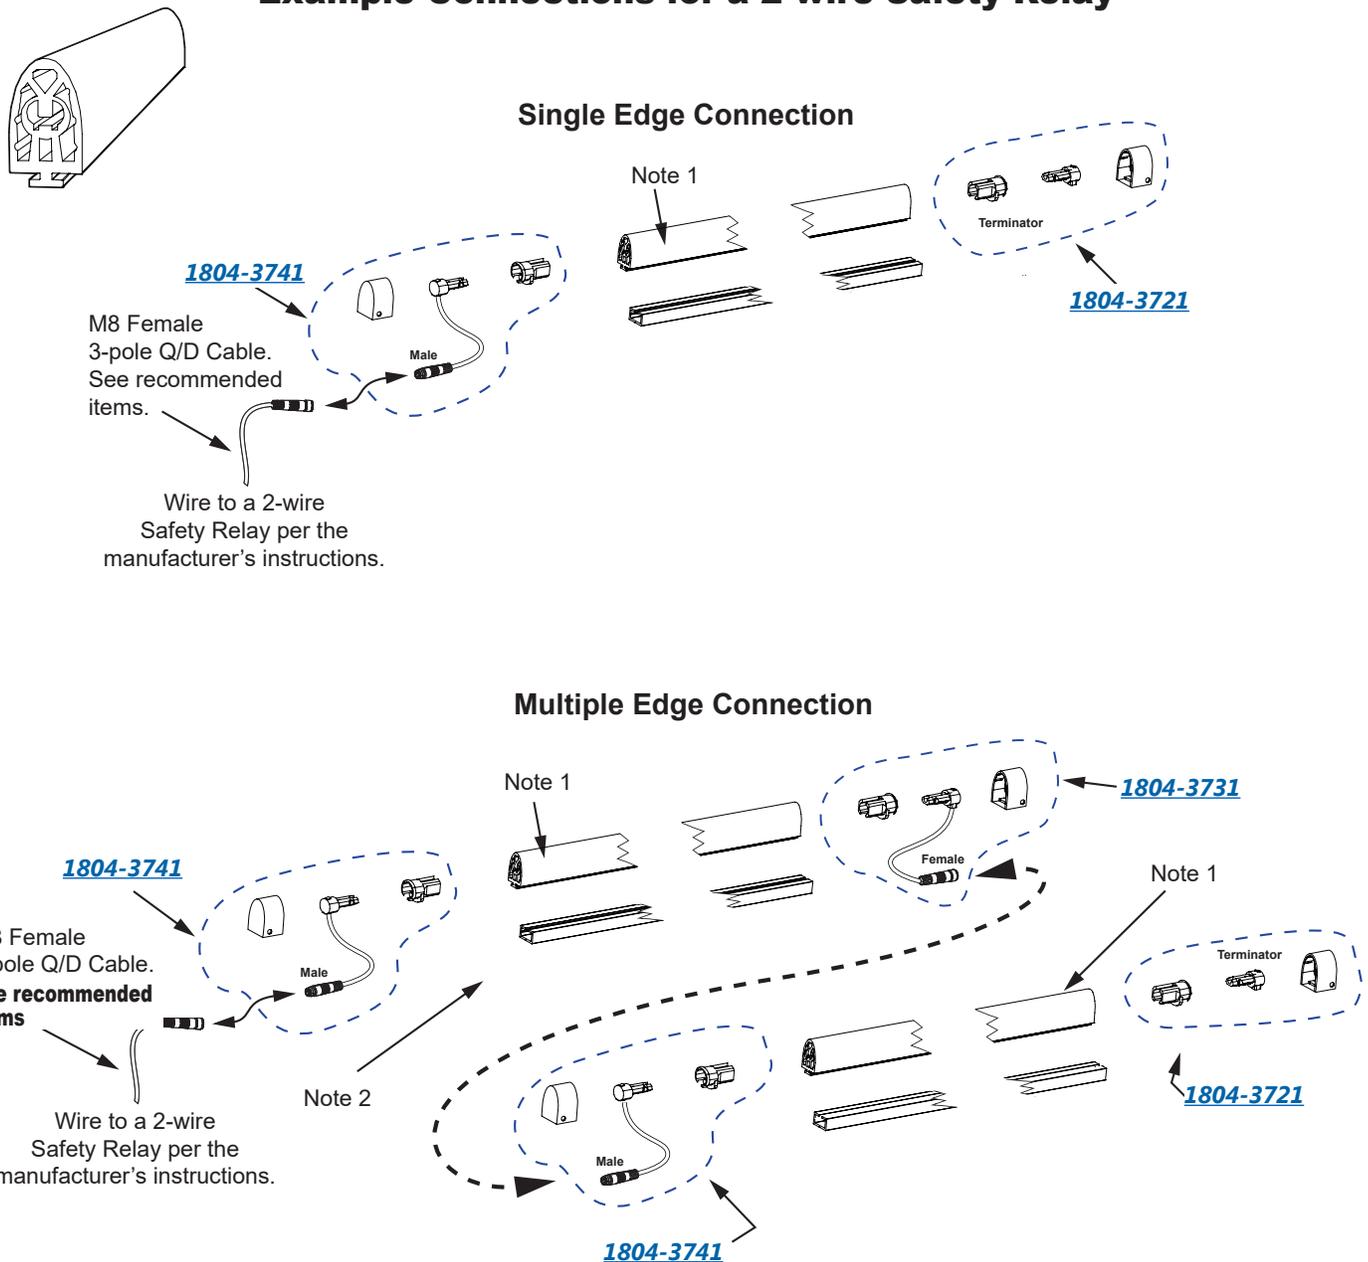


### Selection

Use the following Example Connections drawings to help you select the correct components for your system.

### Example Connections—15 x 25mm edges and end caps

#### Example Connections for a 2-wire Safety Relay



Note 1: [1502-4730](#) 2' Edge (mounting rail included)  
[1502-4731](#) 5' Edge (mounting rail included)


# ASO Safety Solutions
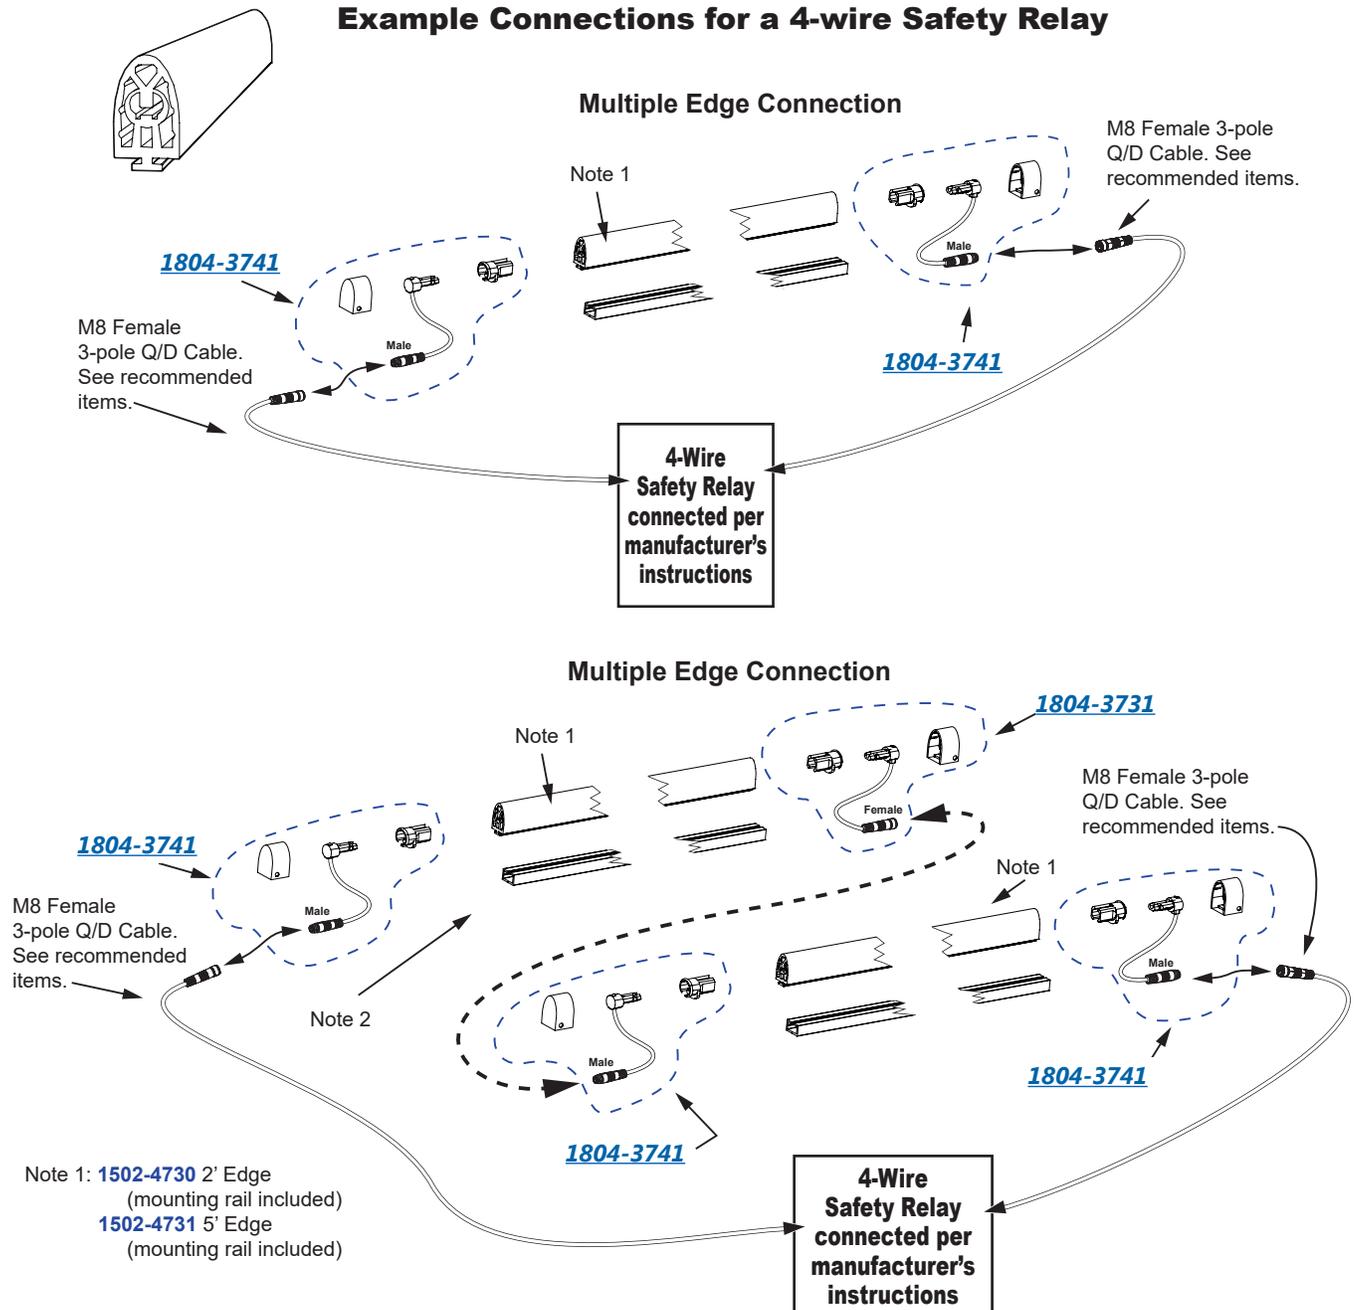
## 15 x 25mm SENTIR Edges and End Caps



### Example Connections – 15 x 25mm edges and end caps

#### Example Connections for a 4-wire Safety Relay



# ASO Safety Solutions

## 15 x 25mm SENTIR Edges and End Caps



<b>SENTIR 15 x 25mm Edges</b>	
	<b>General Specifications</b>
<b>Material</b>	TPE
<b>Material Hardness</b>	68 Shore A
<b>Weight (per meter)</b>	0.2 kg/m [0.14 lb/ft]
<b>Protection Class (Enclosure)</b>	IP65
<b>Switching Cycles</b>	>30,000 (UL 325)
<b>Switching Angle</b>	±45°
<b>Actuation Resistance</b>	≤ 500Ω
<b>Actuation Force</b>	43 N @ 10 mm/s [0.4 in/s] approach speed
<b>Mechanical Life</b>	10,000 cycles
<b>Electrical Capacity</b>	24 VDC, 10 mA
<b>Max. Temperature Range</b>	-25° to 75 °C [-13° to 167 °F]
<b>Operating Temperature</b>	-10° to 50 °C [+14° to 122 °F]
<b>Max. Series Connection</b>	5 contact edges or 100m [328.08ft] based on the ASO safety relay 1114-0210
<b>Inactive End Region with Higher Forces</b>	30mm [1.18in]
<b>Connection Cables</b>	LIY11Y 2 x 0.34 mm <sup>2</sup> (22AWG)
<b>Cable Material</b>	PUR matte black
<b>Agency Approvals</b>	UL Recognized file E341185, CE

# Safety Products



*Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.*

*AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.*