


D4-440/430 Key Features

DL440 CPU
 D4-440 <--->
 D4-440DC-1 <--->
 D4-440DC-2 <--->

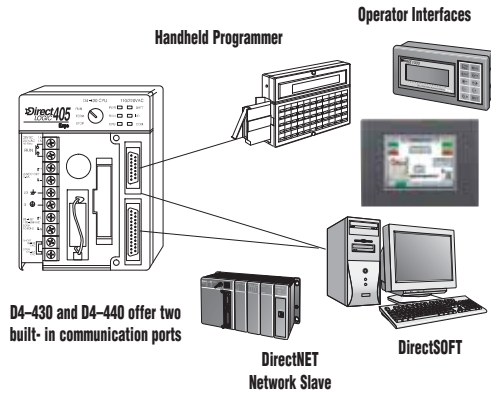

DL430 CPU
 D4-430 <--->

D4-430 and D4-440 offer two built-in communication ports

D4-430 CPU

The D4-430 is the most economical CPU in the DL405 product family. If you are primarily looking at the DL405 because of I/O form factor or reasons that don't require tons of CPU horsepower, try the D4-430.

D4-440 CPU

The D4-440 provides a subset of the D4-450's capabilities. If you need fast boolean execution, good communications, and complex math or PID isn't required, this is the CPU for you.

Instruction set

The D4-440 instruction set includes most of the capabilities of the D4-450. The D4-440 does not support some of the more advanced instructions such as PID, floating point math, drum sequencers, trig. functions, IBoxes, etc.

Two built-in communication ports

D4-440 offers two communication ports. The top port can be used for a direct connection to a personal computer for programming, to our handheld programmer, to our DV-1000, or to operator interfaces and touch panels. The bottom port is a slave-only port and supports our *DirectNET* or K-sequence protocol at speeds up to 19.2K baud.

Range of power supplies

- The D4-440 provides a wide range of power supply options:
- 110/220 VAC
 - 24 VDC
 - 125 VDC

Memory cartridges

The table below shows the memory cartridges available for the D4-440 and D4-450. The D4-440 requires a memory cartridge for program storage. The D4-450 has 7.5K of built-in FLASH program memory. However, you can use a memory cartridge instead of the built-in memory if you need more program space. (The D4-430 has built-in program memory and cannot use a memory cartridge.)

Two built-in communication ports

The D4-430 also offers two communication ports. The top port can be used for a direct connection to a personal computer for programming, to our handheld programmer, to the DV-1000, or to operator interfaces and touch panels. The bottom port is a slave-only port and supports *DirectNET* protocol at speeds up to 19.2K.

Built-in EEPROM memory

One advantage of the D4-430 is 3.5K of built-in EEPROM program memory. A memory cartridge is not required.


	D4-RAM-1 <--->	D4-RAM-2 <--->	D4-UV-1 <--->	D4-UV-2 <--->	D4-EE-2 <--->
Program Storage Capacity	7.5K	15.5K	7.5K	15.5K	15.5K
Cartridge Battery Type	Lithium	Lithium	None	None	None
Writing Cycle Life	N/A	N/A	1,000	1,000	>10,000
Write Inhibit	Internal jumper	Internal jumper	N/A	N/A	Internal jumper
Memory Clear Method	Electrical	Electrical	Ultraviolet light	Ultraviolet light	Electrical

D4-440/430 Features

The following diagram shows the various hardware features found on the D4-440 CPU. The D4-430 looks the same, except that the memory cartridge slot can not be used.

CPU Keyswitch	
RUN	Forces CPU to RUN mode
TERM	Allows peripherals (HPP, DCM, DirectSOFT, etc.) to select operating and TEST modes.
STOP	Forces CPU to STOP mode

CPU Status Indicators					
PWR	ON	CPU power good	BATT	ON	CPU battery low
	OFF	CPU power failure		OFF	CPU battery good
RUN	ON	CPU in RUN mode	I/O	ON	I/O diagnostics error
	OFF	CPU in STOP mode		OFF	I/O diagnostics OK
CPU	ON	CPU diagnostic error	COM	ON	Communication error
	OFF	CPU diagnostics OK		OFF	Communication OK

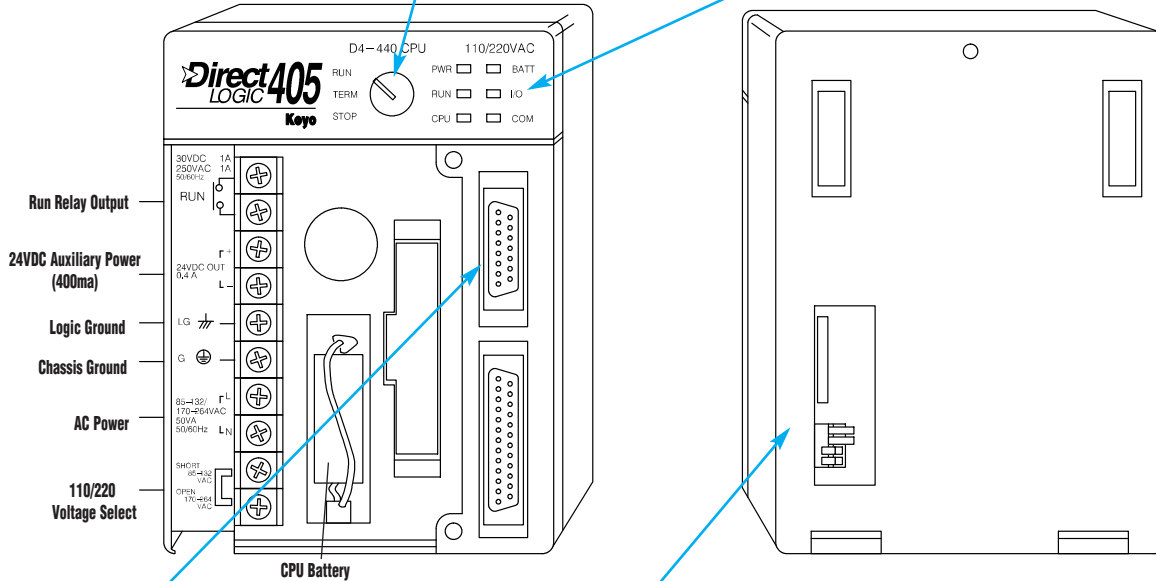


Communication Ports	
15 Pin	Programming port, RS232C, 9600 Baud, K-sequence protocol, connects to HPP, DirectSOFT, DV-1000 and some operator interfaces
25 Pin	Auxiliary port, R232C or RS422, Baud rate selectable via CPU dipswitch, K-sequence protocol, DirectNET protocol (slave only) connects to DirectNET, DirectSOFT, and other operator interfaces

CPU Dipswitch		
SW1	ON	CPU battery disabled
	OFF	CPU battery enabled
SW2	ON	Station address is 1
	OFF	Station address set by HPP

SW3	SW4	Baud
OFF	OFF	300
OFF	ON	1,200
ON	OFF	9,600
ON	ON	19,200

D4-430/D4-440 communications ports pin-outs

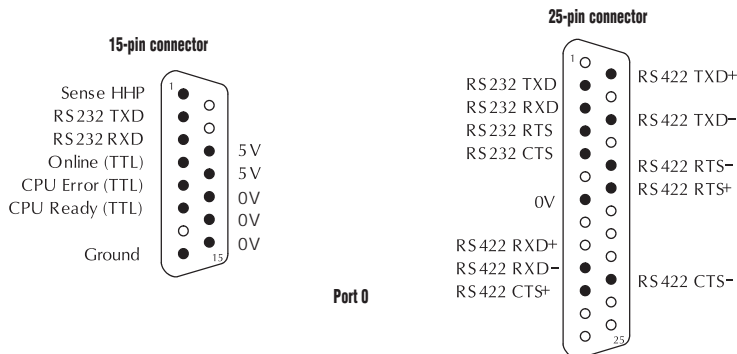

DN-25TB

Communication adapter modules provide a fast, convenient method for field wiring through the use of screw terminals. See the Terminal Blocks & Wiring Solutions section of this catalog for more information.

- PLC Overview
- DL05/06 PLC
- DL105 PLC
- DL205 PLC
- DL305 PLC
- DL405 PLC**
- Field I/O
- Software
- C-more HMIs
- Other HMI
- AC Drives
- Motors
- Steppers/Servos
- Motor Controls
- Proximity Sensors
- Photo Sensors
- Limit Switches
- Encoders
- Current Sensors
- Pushbuttons/Lights
- Process
- Relays/Timers
- Comm.
- TB's & Wiring
- Power
- Circuit Protection
- Enclosures
- Appendix
- Part Index

DL405 CPU Comparisons

DL405 CPU Specifications			
	D4-430	D4-440	D4-450
System Capacity			
Total memory available (words)	6.5K	22.5K	30.8K
Ladder memory (words)			
built-in memory	3.5K EEPROM	None, requires MC	7.5K flash
with memory cartridge	N/A	up to 15.5K	up to 15.5K
V-memory (words)	3.0K	7.0K	15.3K
Battery backup	Yes	Yes	Yes
Total CPU memory I/O pts. available (<i>actual I/O points depend on I/O configuration selected</i>)	1664 (X+Y+CR+GX)	2688 (X+Y+CR+GX)	8192 (X+Y+GX+GY)
I/O module point density	2/4/8/16/32/64	2/4/8/16/32/64	2/4/8/16/32/64
I/O module slots per base	4/6/8	4/6/8	4/6/8
Local/local expansion			
Serial remote I/O (including local & exp. I/O)	1664 max.	1664 max.	4224 max.
Remote I/O Channels	2	2	3
I/O pts. per remote module channel	512	512	512; 2048 (port 3)
Ethernet Remote I/O (including local/exp. I/O)			
discrete I/O pts.	1664 max. (Including local and exp.I/O)	2688 max. (Including local and exp.I/O)	8192 max. (Including local and exp.I/O)
Analog I/O channels	map into V-memory	map into V-memory	map into V-memory
Remote I/O channels	Limited by power budget	Limited by power budget	Limited by power budget
I/O per remote channel	16,384 (limited to 1664)	16,384 (limited to 2688)	16,384 (16 fully expanded H4-EBC slaves using V-memory and bit-of-word instructions)
Performance			
Contact execution (boolean)	3.0µs	0.33µs	0.96µs
Typical scan (1K boolean)	8-10ms	2-3ms	4-5ms
Programming and Diagnostics			
RLL ladder style	Yes	Yes	Yes
RLL PLUS/flowchart style (Stages)	Yes/384	Yes/1024	Yes/1024
Run time editing	No	Yes	Yes
Variable/fixe scan	Variable	Variable	Fixed or variable
Instructions	113	170	210
Control relays	480	1024	2048
Timers	128	256	256
Counters	128	128	256
Immediate I/O	Yes	Yes	Yes
Subroutines	No	Yes	Yes
For/next loops	No	Yes	Yes
Timed interrupt	No	Yes	Yes
Integer math	Yes	Yes	Yes
Floating-point math	No	No	Yes
Trigonometric functions	No	No	Yes
Table instructions	No	Yes	Yes
PID	No	No	Yes
Drum sequencers	No	No	Yes
Bit of word	No	No	Yes
Real-time clock/calendar	No	Yes	Yes
Internal diagnostics	Yes	Yes	Yes
Password security	No	Yes	Multi-level
System and User error log	No	Yes	Yes
IBox instructions	No	No	Yes
CPU Ports Communications			
Built-in ports	2 ports	2 ports	4 ports
K-sequence (proprietary protocol)	Yes	Yes	Yes
DirectNET	Yes	Yes	Yes
Modbus master/slave	No	No	Yes
ASCII out (Print)	No	No	Yes
Maximum baud rate	19.2K	19.2K	38.4K

PLC Overview

DL05/06 PLC

DL105 PLC

DL205 PLC

DL305 PLC

DL405 PLC

Field I/O

Software

C-more HMIs

Other HMI

AC Drives

Motors

Steppers/ Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pushbuttons/ Lights

Process

Relays/ Timers

Comm.

TB's & Wiring

Power

Circuit Protection

Enclosures

Appendix

Part Index