



Connection Cables

ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Weight (lbs)	Price
BRX ZIPLink Cables				
ZL-BX-CBL15	ZIPLink I/O cable, 15-position terminal block to 24-pin connector, 1.6 ft / 0.5 m cable length. For use with 18-point and 36-point BRX MPUs.	300V, 80°C	0.3	
ZL-BX-CBL15-1	ZIPLink I/O cable, 15-position terminal block to 24-pin connector, 3.2 ft / 1m cable length. For use with 18-point and 36-point BRX MPUs.	300V, 80°C	0.4	
ZL-BX-CBL15-2	ZIPLink I/O cable, 15-position terminal block to 24-pin connector, 6.5 ft / 2m cable length. For use with 18-point and 36-point BRX MPUs.	300V, 80°C	0.7	
ZL-BX-CBL15-1P	ZIPLink I/O cable, 15-position terminal block to pigtail, 3.2 ft / 1m cable length. For use with 18-point and 36-point BRX MPUs.	300V, 80°C	0.4	
ZL-BX-CBL15-2P	ZIPLink I/O cable, 15-position terminal block to pigtail, 6.5 ft / 2m cable length. For use with 18-point and 36-point BRX MPUs.	300V, 80°C	0.6	
ZL-BX-CBL20	ZIPLink I/O cable, 20-position terminal block to 24-pin connector, 1.6 ft / 0.5 m cable length. For use with 10-point BRX MPUs.	300V, 80°C	0.3	
ZL-BX-CBL20-1	ZIPLink I/O cable, 20-position terminal block to 24-pin connector, 3.2 ft / 1m cable length. For use with 10-point BRX MPUs.	300V, 80°C	0.5	
ZL-BX-CBL20-2	ZIPLink I/O cable, 20-position terminal block to 24-pin connector, 6.5 ft / 2m cable length. For use with 10-point BRX MPUs.	300V, 80°C	0.7	
ZL-BX-CBL20-1P	ZIPLink I/O cable, 20-position terminal block to pigtail, 3.2 ft / 1m cable length. For use with 10-point BRX MPUs.	300V, 80°C	0.4	
ZL-BX-CBL20-2P	ZIPLink I/O cable, 20-position terminal block to pigtail, 6.5 ft / 2m cable length. For use with 10-point BRX MPUs.	300V, 80°C	0.7	
ZL-BXEM-CBL10	ZIPLink I/O cable, 10-position terminal block to 24-pin connector, 1.6 ft / 0.5 m cable length. For use with 8-point BRX discrete expansion modules.	300V, 80°C	0.3	
ZL-BXEM-CBL10-1	ZIPLink I/O cable, 10-position terminal block to 24-pin connector, 3.2 ft / 1m cable length. For use with 8-point BRX discrete expansion modules.	300V, 80°C	0.4	
ZL-BXEM-CBL10-2	ZIPLink I/O cable, 10-position terminal block to 24-pin connector, 6.5 ft / 2m cable length. For use with 8-point BRX discrete expansion modules.	300V, 80°C	0.7	
ZL-BXEM-CBL10-1P	ZIPLink I/O cable, 10-position terminal block to pigtail, 3.2 ft / 1m cable length. For use with 8-point BRX discrete expansion modules.	300V, 80°C	0.4	
ZL-BXEM-CBL10-2P	ZIPLink I/O cable, 10-position terminal block to pigtail, 6.5 ft / 2m cable length. For use with 8-point BRX discrete expansion modules.	300V, 80°C	0.6	
ZL-BXEM-CBL15	ZIPLink I/O cable, 15-position terminal block to 24-pin connector, 1.6 ft / 0.5 m cable length. For use with 5-point and 12-point BRX discrete expansion modules.	300V, 80°C	0.3	
ZL-BXEM-CBL15-1	ZIPLink I/O cable, 15-position terminal block to 24-pin connector, 3.2 ft / 1m cable length. For use with 5-point and 12-point BRX discrete expansion modules.	300V, 80°C	0.5	
ZL-BXEM-CBL15-2	ZIPLink I/O cable, 15-position terminal block to 24-pin connector, 6.5 ft / 2m cable length. For use with 5-point and 12-point BRX discrete expansion modules.	300V, 80°C	0.7	
ZL-BXEM-CBL15-1P	ZIPLink I/O cable, 15-position terminal block to pigtail, 3.2 ft / 1m cable length. For use with 5-point and 12-point BRX discrete expansion modules.	300V, 80°C	0.4	
ZL-BXEM-CBL15-2P	ZIPLink I/O cable, 15-position terminal block to pigtail, 6.5 ft / 2m cable length. For use with 5-point and 12-point BRX discrete expansion modules.	300V, 80°C	0.7	
ZL-BXEM-CBL20	ZIPLink I/O cable, 20-position terminal block to 24-pin connector, 1.6 ft / 0.5 m cable length. For use with BRX analog expansion modules and 16-point BRX discrete expansion modules.	300V, 80°C	0.3	
ZL-BXEM-CBL20-1	ZIPLink I/O cable, 20-position terminal block to 24-pin connector, 3.2 ft / 1m cable length. For use with BRX analog expansion modules and 16-point BRX discrete expansion modules.	300V, 80°C	0.5	
ZL-BXEM-CBL20-2	ZIPLink I/O cable, 20-position terminal block to 24-pin connector, 6.5 ft / 2m cable length. For use with BRX analog expansion modules and 16-point BRX discrete expansion modules.	300V, 80°C	0.7	
ZL-BXEM-CBL20-1P	ZIPLink I/O cable, 20-position terminal block to 24-pin connector, 3.2 ft / 1m cable length. For use with BRX analog expansion modules and 16-point BRX discrete expansion modules.	300V, 80°C	0.4	
ZL-BXEM-CBL20-2P	ZIPLink I/O cable, 20-position terminal block to 24-pin connector, 6.5 ft / 2m cable length. For use with BRX analog expansion modules and 16-point BRX discrete expansion modules.	300V, 80°C	0.7	



ZL-BX-CBL15



ZL-BX-CBL20-1P



ZL-BXEM-CBL20



ZL-BXEM-CBL20-1P




Connection Cables (cont.)


ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Weight (lbs)	Price
BRX ZIPLink Cables, continued				
ZL-D24-CBL40	Cable w/180° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D24-CBL40-1	Cable w/180° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2	Cable w/180° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-X	Cable w/45° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D24-CBL40-1X	Cable w/45° plug for module with 40-pin connector to 40-pin connector, 24 AWG 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2X	Cable w/45° plug for module with 40-pin connector to 40-pin connector, 24 AWG 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-1P	Cable w/180° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2P	Cable w/180° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-1XP	Cable w/45° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2XP	Cable w/45° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	



ZL-D24-CBL40

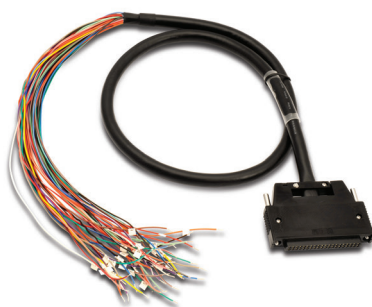

ZL-D24-CBL40-1P

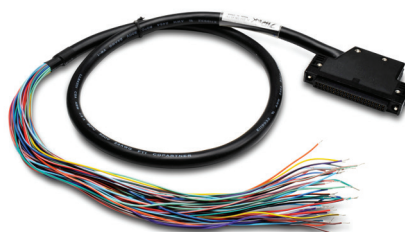

ZL-D24-CBL40-1XP



Connection Cables (cont.)

ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Weight (lbs)	Price
CLICK ZIPLink Cables				
ZL-C0-CBL11	Cable for module with 11 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.21	
ZL-C0-CBL11-1	Cable for module with 11 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.31	
ZL-C0-CBL11-2	Cable for module with 11 terminals to 24-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-C0-CBL11-1P	Cable for module with 11 terminals to pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.21	
ZL-C0-CBL11-2P	Cable for module with 11 terminals to pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.26	
ZL-C0-CBL20	Cable for module with 20 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.25	
ZL-C0-CBL20-1	Cable for module with 20 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.31	
ZL-C0-CBL20-2	Cable for module with 20 terminals to 24-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-C0-CBL20-1P	Cable for module with 20 terminals to pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.21	
ZL-C0-CBL20-2P	Cable for module with 20 terminals to pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.26	
DL05 and DL06 ZIPLink Cables				
ZL-D0-CBL8	Cable for module with 8 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.26	
ZL-D0-CBL8-1	Cable for module with 8 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-D0-CBL8-1P	Cable for module with 8-pin connector to pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.21	
ZL-D0-CBL10	Cable for module with 10 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.26	
ZL-D0-CBL10-1	Cable for module with 10 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-D0-CBL10-1P	Cable for module with 10-pin connector to pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.21	
ZL-D0-CBL13	Cable for module with 13 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.26	
ZL-D0-CBL13-1	Cable for module with 13 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-D0-CBL13-1P	Cable for module with 13-pin connector to pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.21	
ZL-D0-CBL24	Cable for module with 24-pin connector to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.26	
ZL-D0-CBL24-1	Cable for module with 24-pin connector to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-D0-CBL24-2	Cable for module with 24-pin connector to 24-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-D0-CBL24-L	Cable for module with 24-pin connector to 24-pin connector for LED module, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.26	
ZL-D0-CBL24-1L	Cable for module with 24-pin connector to 24-pin connector for LED module, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-D0-CBL24-2L	Cable for module with 24-pin connector to 24-pin connector for LED module, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-D0-CBL24-1P	Cable for module with 24-pin connector to 24-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.26	
ZL-D0-CBL24-2P	Cable for module with 24-pin connector to 24-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	



ZL-C0-CBL11



ZL-D0-CBL10-1



ZL-D0-CBL24-1



ZL-D0-CBL24-1P



Connection Cables (cont.)

ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Weight (lbs)	Price
DL05 and DL06 ZIPLink Cables, continued				
ZL-D06X-CBL20	Cable used to connect DirectLOGIC 06 PLC fixed inputs with 20 terminals to the ZL-RTB20 ZIPLink module with a 24-pin connector, can be used on the input side terminal block only, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D06X-CBL20-1	Cable used to connect DirectLOGIC 06 PLC fixed inputs with 20 terminals to the ZL-RTB20 ZIPLink module with a 24-pin connector, can be used on the input side terminal block only, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.46	
ZL-D06Y-CBL20	Cable used to connect DirectLOGIC 06 PLC fixed outputs with 20 terminals to the ZL-RTB20 ZIPLink module with a 24-pin connector, can be used on the output side terminal block only, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D06Y-CBL20-1	Cable used to connect DirectLOGIC 06 PLC fixed outputs with 20 terminals to the ZL-RTB20 ZIPLink module with a 24-pin connector, can be used on the output side terminal block only, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.46	
ZL-D06-CBL24-1P	Cable that allows DirectLOGIC 06 PLC fixed I/O with 24 terminals to custom wire to third party devices, can be used on the input side terminal block or the output side terminal block of the DL06, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-D05-CBL18	Cable used to connect DirectLOGIC 05 PLC fixed I/O with 18 terminals to the ZL-RTB20 ZIPLink module with a 24-pin connector, can be used on the input side terminal block or the output side terminal block of the DL05, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D05-CBL22-1P	Cable that allows DirectLOGIC 05 PLC fixed I/O with 20 terminals to custom wire to third party devices, can be used on the input side terminal block or the output side terminal block of the DL05, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.32	
Do-more / DL205 ZIPLink Cables				
ZL-D2-CBL10	Cable for module with 10 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D2-CBL10-1	Cable for module with 10 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.61	
ZL-D2-CBL10-2	Cable for module with 10 terminals to 24-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D2-CBL10-1P	Cable for module with 10 terminals to pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.31	
ZL-D2-CBL10-2P	Cable for module with 10 terminals to pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.46	
ZL-D2-CBL19	Cable for module with 19 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D2-CBL19-1	Cable for module with 19 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.61	
ZL-D2-CBL19-2	Cable for module with 19 terminals to 24-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D2-CBL19-1P	Cable for module with 19 terminals to pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.61	
ZL-D2-CBL19-2P	Cable for module with 19 terminals to pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40	Cable w/180° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D24-CBL40-1	Cable w/180° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-2	Cable w/180° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-X	Cable w/45° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D24-CBL40-1X	Cable w/45° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-2X	Cable w/45° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	



ZL-D06X-CBL20



ZL-D2-CBL10



ZL-D24-CBL40



ZL-D2-CBL19-1P



Connection Cables (cont.)

ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Weight (lbs)	Price
Do-more / DL205 ZIPLink Cables, continued				
ZL-D24-CBL40-1P	Cable w/180° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2P	Cable w/180° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-1XP	Cable w/45° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2XP	Cable w/45° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CON-R	ZIPLink ribbon-style connector, 40-pin, qty. 2	N/A	0.36	
ZL-D24-CON	ZIPLink solder-style connector, 180°, 40-pin, qty. 2	N/A	0.36	
ZL-D24-CON-X	ZIPLink solder-style connector, 105°, 40-pin, qty. 2	N/A	0.36	
DL305 ZIPLink Cables				
ZL-D3-CBL18	Cable for module with 18 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D3-CBL18-2	Cable for module with 18 terminals to 24-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
DL405 ZIPLink Cables				
ZL-D4-CBL20	Cable for module with 20 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D4-CBL20-1	Cable for module with 20 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D4-CBL20-2	Cable for module with 20 terminals to 24-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40	Cable w/180° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D24-CBL40-1	Cable w/180° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2	Cable w/180° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-X	Cable w/45° plug for module with 40-pin connector to 40-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-D24-CBL40-1X	Cable w/45° plug for module with 40-pin connector to 40-pin connector, 24 AWG 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2X	Cable w/45° plug for module with 40-pin connector to 40-pin connector, 24 AWG 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-1P	Cable w/180° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2P	Cable w/180° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CBL40-1XP	Cable w/45° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-D24-CBL40-2XP	Cable w/45° plug for module with 40-pin connector to 40-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-D24-CON-R	ZIPLink ribbon-style connector, 40-pin, qty. 2	N/A	0.36	
ZL-D24-CON	ZIPLink solder-style connector, 180°, 40-pin, qty. 2	N/A	0.36	
ZL-D24-CON-X	ZIPLink solder-style connector, 45°, 40-pin, qty. 2	N/A	0.36	



ZL-D24-CBL40-1P



ZL-D4-CBL20



ZL-D3-CBL18



ZL-D24-CBL40-1XP



ZL-D24-CON Parts



Connection Cables (cont.)

ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Weight (lbs)	Price
Productivity1000 ZIPLink Cables				
ZL-P1-CBL10	Cable for module with 10 terminals to 24-pin 90-degree connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.26	
ZL-P1-CBL10-1	Cable for module with 10 terminals to 24-pin 90-degree connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.38	
ZL-P1-CBL10-2	Cable for module with 10 terminals to 24-pin 90-degree connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.63	
ZL-P1-CBL10-1P	Cable for module with 10 terminals connector to 20-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.31	
ZL-P1-CBL10-2P	Cable for module with 10 terminals connector to 20-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-P1-CBL18	Cable for module with 18 terminals to 24-pin 90-degree connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.28	
ZL-P1-CBL18-1	Cable for module with 18 terminals to 24-pin 90-degree connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.41	
ZL-P1-CBL18-2	Cable for module with 18 terminals to 24-pin 90-degree connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.66	
ZL-P1-CBL18-1P	Cable for module with 18 terminals connector to 20-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.33	
ZL-P1-CBL18-2P	Cable for module with 18 terminals connector to 20-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.58	
Serial Communication ZIPLink Cables				
ZL-RJ12-CBL-2	Crossover cable with 6-pin RJ12 to 6-pin RJ12 connectors, 26 AWG, 6.6 ft. (2.0 m)	150V, 60°C	0.26	
ZL-RJ12-CBL-2P	Cable with 6-pin RJ12 connector to 6-wire pigtail, 26 AWG, 6.6 ft. (2.0 m)	150V, 60°C	0.26	



ZL-P1-CBL10-1



ZL-P1-CBL10-1P



ZL-RJ12-CBL-2



ZL-RJ12-CBL-2P



ZL-P1-CBL18-1



ZL-P1-CBL18-1P



Connection Cables (cont.)

ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Weight (lbs)	Price
Productivity2000 ZIPLink Cables				
ZL-P2-CBL18	Cable for module with 18 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-P2-CBL18-1	Cable for module with 18 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-P2-CBL18-2	Cable for module with 18 terminals to 24-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-P2-CBL18-1P	Cable for module with 18-pin connector to 20-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-P2-CBL18-2P	Cable for module with 18-pin connector to 20-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-P2-CBL24	Cable for module with 24 terminals to 24-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-P2-CBL24-1	Cable for module with 24 terminals to 24-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-P2-CBL24-2	Cable for module with 24 terminals to 24-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-P2-CBL24-1P	Cable with 24-pin connector to 24-wire pigtail for connecting any 24-pin ZIPLink module to another device, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-P2-CBL24-2P	Cable with 24-pin connector to 24-wire pigtail for connecting any 24-pin ZIPLink module to another device, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-P3-CBL40-1P	ZIPLink PLC I/O cable, for Productivity Modules, 40-pin connector to pigtail, 24 AWG, 1.0 meter (3.3 ft.) length.	300V, 80°C	0.56	
ZL-P3-CBL40-2P	ZIPLink PLC I/O cable, for Productivity Modules, 40-pin connector to pigtail, 24 AWG, 2.0 meter (6.6 ft.) length.	300V, 80°C	0.56	
ZL-CBL40-S	Cable for module with 40-pin connector to 40-pin connector, shielded, 24 AWG, 1.6 ft. (0.5 m) (High-Speed I/O modules only)	300V, 80°C	0.4	
ZL-CBL40-1S	Cable for module with 40-pin connector to 40-pin connector, shielded, 24 AWG, 3.3 ft. (1.0 m) (High-Speed I/O modules only)	300V, 80°C	0.7	
ZL-CBL40-2S	Cable for module with 40-pin connector to 40-pin connector, shielded, 24 AWG, 6.6 ft. (2.0 m) (High-Speed I/O modules only)	300V, 80°C	1.2	
Serial Communication ZIPLink Cables				
ZL-RJ12-CBL-2	Crossover cable with 6-pin RJ12 to 6-pin RJ12 connectors, 26 AWG, 6.6 ft. (2.0 m)	150V, 60°C	0.26	
ZL-RJ12-CBL-2P	Cable with 6-pin RJ12 connector to 6-wire pigtail, 26 AWG, 6.6 ft. (2.0 m)	150V, 60°C	0.26	



ZL-P2-CBL18-1



ZL-P2-CBL18-1P



ZL-RJ12-CBL-2



ZL-RJ12-CBL-2P



ZL-P2-CBL24-1P



Connection Cables (cont.)

ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Weight (lbs)	Price
Productivity3000 ZIPLink Cables				
ZL-P3-CBL20	Cable for module with 20 terminals to 20-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-P3-CBL20-1	Cable for module with 20 terminals to 20-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-P3-CBL20-2	Cable for module with 20 terminals to 20-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-P3-CBL20-L	Cable for module with 20-pin connector to 20-pin connector for LED module, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-P3-CBL20-1L	Cable for module with 20-pin connector to 20-pin connector for LED module, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-P3-CBL20-2L	Cable for module with 20-pin connector to 20-pin connector for LED module, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-P3-CBL20-P	Cable for module with 20-pin connector to 20-wire pigtail, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-P3-CBL20-1P	Cable for module with 20-pin connector to 20-wire pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-P3-CBL20-2P	Cable for module with 20-pin connector to 20-wire pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-CBL40	Cable for module with 40-pin connector to 40-pin connector, 24 AWG, 1.6 ft. (0.5 m)	300V, 80°C	0.36	
ZL-CBL40-1	Cable for module with 40-pin connector to 40-pin connector, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.56	
ZL-CBL40-2	Cable for module with 40-pin connector to 40-pin connector, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.61	
ZL-CBL40-S	Cable for module with 40-pin connector to 40-pin connector, shielded, 24 AWG, 1.6 ft. (0.5 m) (High-Speed I/O modules only)	300V, 80°C	0.4	
ZL-CBL40-1S	Cable for module with 40-pin connector to 40-pin connector, shielded, 24 AWG, 3.3 ft. (1.0 m) (High-Speed I/O modules only)	300V, 80°C	0.7	
ZL-CBL40-2S	Cable for module with 40-pin connector to 40-pin connector, shielded, 24 AWG, 6.6 ft. (2.0 m) (High-Speed I/O modules only)	300V, 80°C	1.2	
ZL-P3-CBL40-1P	Cable for module with 40 terminals to pigtail, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.41	
ZL-P3-CBL40-2P	Cable for module with 40 terminals to pigtail, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
Universal ZIPLink Cables				
ZL-CBL24-1P	Cable with 24-pin connector to 24-wire pigtail for connecting any 24-pin ZIPLink module to another device, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.36	
ZL-CBL24-2P	Cable with 24-pin connector to 24-wire pigtail for connecting any 24-pin ZIPLink module to another device, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-DB9F-CBL-2P	ZIPLink pigtail cable with 9-pin D-sub female connector, 28 AWG, 2.0 m (6.6 ft) length	300V, 80°C	0.30	
ZL-DB9F-CBL-5P	ZIPLink pigtail cable with 9-pin D-sub female connector, 28 AWG, 5.0 m (16.4 ft) length	300V, 80°C	0.30	
ZL-CBL40-1P	Cable that allows the ZL-RTB40, ZL-RFU40 or ZL-LTB32-24-1 to custom wire to third party devices, 24 AWG, 3.3 ft. (1.0 m)	300V, 80°C	0.41	
ZL-CBL40-2P	Cable that allows the ZL-RTB40, ZL-RFU40 or ZL-LTB32-24-1 to custom wire to third party devices, 24 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
Serial Communication ZIPLink Cables				
ZL-DB9-CBL-2	Shielded cable with 9-pin D-sub male to female connectors, 28 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.36	
ZL-DB15-CBL-2	Shielded cable with 15-pin D-sub male to female connectors, 28 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-DB25-CBL-2	Shielded cable with 25-pin D-sub male to female connectors, 28 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.56	
ZL-RJ12-CBL-2	Crossover cable with 6-pin RJ12 to 6-pin RJ12 connectors, 26 AWG, 6.6 ft. (2.0 m)	150V, 60°C	0.26	
ZL-RJ12-CBL-2P	Cable with 6-pin RJ12 connector to 6-wire pigtail, 26 AWG, 6.6 ft. (2.0 m)	150V, 60°C	0.26	



ZL-P3-CBL20-1



ZL-CBL24-1P



ZL-DB9-CBL-2



ZL-RJ12-CBL-2



ZL-DB9F-CBL-2P



ZL-RJ12-CBL-2P



Connection Cables (cont.)

ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Weight (lbs)	Price
AC Drive, Servo, Stepper, and Soft Starter ZIPLink Cables				
GS-RJ12-CBL-2	RS232 cable with 6-pin RJ12 connector to 6-pin RJ12 connector for GS2 Series drives ONLY. 26 AWG, 6.6 ft. (2.0 m)	300V, 80°C	0.26	
GS-485HD15-CBL-2	RS485 shielded twisted pair cable with 6-pin RJ12 to HD 15-pin male connector for all GS Series/DuraPulse drives, 28 AWG, 6.6 ft. (2.0 m)	30V, 80°C	0.26	
GS-485RJ12-CBL-2	GS drive communication cable with 6-pin RJ12 connector to 6-pin RJ12 connector, 3-wire straight-through, 26 AWG, 6.6 ft. (2.0 m). Use this cable and a ZL-CDM-RJ12Xxx distribution module to create a plug and play RS-485 network. Connect multiple SureServo amplifiers, Stellar SR44 soft starters, GS series drives, and Durapulse series drives to a PLC via RS-485.	300V, 80°C	0.11	
GS-EDRV-CBL-2	GS drive communication cable with 6-pin RJ12 connector to 6-pin RJ12 connector, 6-wire straight-through, 26 AWG, 6.6 ft. (2.0 m). Use this cable to connect GS series and Durapulse series drives to the GS-EDRV Ethernet communication module.	150V, 60°C	0.11	
GS-ISOCAN-CBL-2	GS drive communication cable with 6-pin RJ12 connector to the FA-ISOCAN 5-pin connector, 26 AWG, 6.6 ft. (2.0 m). Use this cable to connect GS series and Durapulse series drives to the FA-ISOCAN universal serial communications converter.	150V, 60°C	0.11	
ZL-SVC-CBL50	Shielded twisted pair cable with 50-pin connectors to connect any SureServo amplifier to a ZL-RTB50 module, 28 AWG, 1.6 ft. (0.5 m)	30V, 80°C	0.36	
ZL-SVC-CBL50-1	Shielded twisted pair cable with 50-pin connectors to connect any SureServo amplifier to a ZL-RTB50 module, 28 AWG, 3.3 ft. (1.0 m)	30V, 80°C	0.46	
ZL-SVC-CBL50-2	Shielded twisted pair cable with 50-pin connectors to connect any SureServo amplifier to a ZL-RTB50 module, 28 AWG, 6.6 ft. (2.0 m)	30V, 80°C	0.56	
ZL-CBL50-1P	SureServo cable used to connect any SureServo amplifier to custom wire to third party devices, 28AWG, 3.3 ft. (1.0 m)	30V, 80°C	0.46	
ZL-CBL50-2P	SureServo cable used to connect any SureServo amplifier to custom wire to third party devices, 28AWG, 6.6 ft. (2.0 m)	30V, 80°C	0.56	
SVC-232RJ12-CBL-2	RS232 shielded twisted pair cable with 6-pin RJ12 to 6-pin IEEE connector for all SureServo amplifiers, 6.6 ft. (2.0m)	30V, 80°C	0.16	
SVC-485HD15-CBL-2	RS485 shielded twisted pair cable with HD 15-pin male to 6-pin IEEE connector for all SureServo amplifiers, 6.6 ft. (2.0 m)	30V, 80°C	0.26	
SVC-485RJ12-CBL-2	SureServo amplifier communication cable with a RJ12 male to a 6-pin IEEE connector, shielded, twisted pair, 6.6 ft. (2.0 m). Use this cable and a ZL-CDM-RJ12Xxx distribution module to create a plug and play RS-485 network. Connect multiple SureServo amplifiers, Stellar SR44 soft starters, GS series drives, and Durapulse series drives to a PLC via RS-485.	30V, 80°C	0.16	
SVC-485CFG-CBL-2	SureServo amplifier configuration cable with 6-pin IEEE connector to RJ45 connector, shielded, twisted pair, 6.6 ft. (2.0 m). Use this cable in conjunction with the USB-485M serial adapter to connect any SureServo amplifier to a PC. Eliminates the need to reprogram networked servo drives from RS485 to RS232 when connecting to a PC.	30V, 80°C	0.16	
STP-232RJ12-CBL-2	SureStep drive communication cable with 6P4C RJ11 connector to 6-pin RJ12 connector, 3-wire, RS-232, 26 AWG, 6.6 ft. (2.0 m). Use this cable to connect STP-DRV-4850 or STP-DRV-80100 stepper drives to a DL05 PLC or a CLICK PLC.	300V, 80°C	0.11	
STP-232HD15-CBL-2	SureStep drive communication cable with 6P4C RJ11 connector to 15-pin high density connector, 3-wire, RS-232, 26 AWG, 6.6 ft. (2.0 m). Use this cable to connect STP-DRV-4850 or STP-DRV-80100 stepper drives to a DL06 PLC or a DL205 PLC using a D2-250-1 or D2-260 CPU.	30V, 80°C	0.21	
SR44-485HD15-CBL-2	Stellar soft starter communication cable with 6-pin RJ45 connector to 15-pin high density connector, 3-wire, RS-485, 26 AWG, 6.6ft. (2.0 m). Use this cable to connect a Stellar SR44 series soft starter (with optional SR44-RS485 communication adapter) to a DL06 PLC or a DL205 PLC using a D2-250-1 or D2-260 CPU.	30V, 80°C	0.21	
SR44-485RJ45-CBL-2	Stellar SR44 soft starter communication cable with 6-pin RJ45 connector to 6-pin RJ12 connector, 3-wire, RS-485, 26 AWG, 6.6 ft. (2.0 m). Use this cable and a ZL-CDM-RJ12Xxx distribution module to create a plug and play RS-485 network. Connect multiple SureServo amplifiers, Stellar SR44 soft starters (with optional SR44-RS485 communication adapter), GS series drives, and Durapulse series drives to a PLC via RS-485.	30V, 80°C	0.16	



GS-485HD15-CBL-2



SVC-232RJ12-CBL-2



SVC-485HD15-CBL-2



ZL-SVC-CBL50



ZL-CBL50-1P