


Specialty Modules

P2-HSO

\$288.00

High-Speed Output

The P2-HSO High-Speed (1MHz) output module supports pulse/direction, up/down and quadrature pulse output on each of the two independent output channels. Additionally, it has six 5–24 VDC general purpose inputs and four 5–24 VDC general purpose outputs.

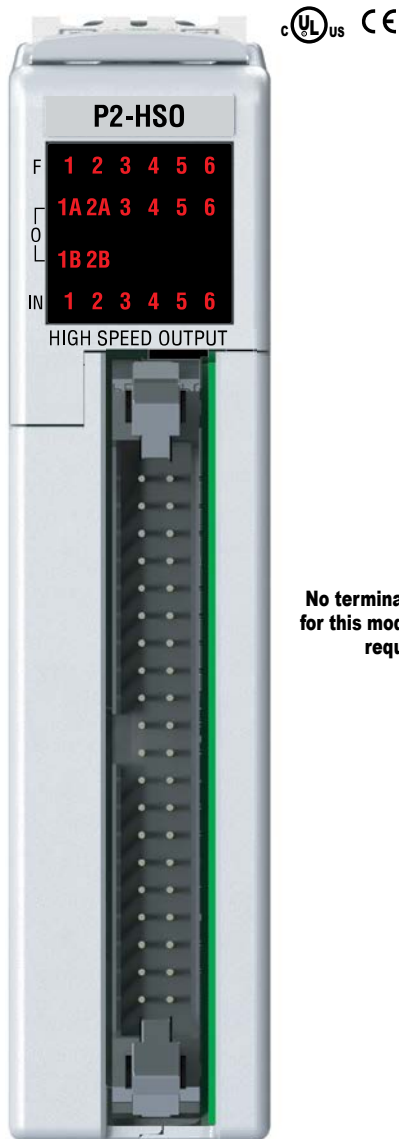

No terminal block sold
for this module; ZIPLink
required.



NOTE: The most recent Productivity Suite software and firmware versions may be required to support new modules and new features.

See Wiring Solutions for part numbers of ZIPLink cables and connection modules required with this I/O module.



General Specifications

Module Type	Intelligent
Modules per Base	15 Maximum (See Note)
I/O Points Used	None, mapped directly to tags in CPU
Operating Temperature	0° to 60°C (32° to 140°F)
Storage Temperature	-20° to 70°C (-4° to 158°F)
Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	IEC 60068-2-6 (Test Fc)
Shock	IEC 60068-2-27 (Test Ea)
Field to Logic Side Isolation	1800VAC applied for 1 second
Insulation Resistance	>10MΩ @ 500VDC
Heat Dissipation	6.26 W
Enclosure Type	Open equipment
Emissions	EN61000-6-4 (Conducted and Radiated RF Emissions)
Module Keying to Backplane	Electronic
Module Location	Any I/O slot in a Productivity2000 system
Field Wiring	Use ZIPLink wiring system ONLY. See Wiring Solutions.
Weight	90g (3.2 oz)
Agency Approvals**	UL 61010-1 and UL 61010-2-201 File E139594, Canada & USA CE (EN 61131-2 EMC, EN 61010-1 and EN 61010-2-201 Safety)*

*Meets EMC and Safety requirements. See the Declaration of Conformity for details.

**To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific component part number web page.

Status LEDs

Fault Status LEDs*	(F) 1, 2, 3, 4, 5, 6 (one per pulse output and one per status output)
Input LEDs	(IN) 1, 2, 3, 4, 5, 6 (one per status input)
Output Status LEDs	(O) OUT 1A & 1B, OUT 2A & 2B, OUT 3, 4, 5, 6

* All front panel fault LED's blinking indicates loss of 24VDC external power to the module.

Connector Specifications

Connector Type	IDC style header with latch, Omron XG4A-4034
Number of Pins	40 point
Pitch	0.1 in (2.54 mm)


Power Specifications

External Power	24VDC -15% / +10%, Class 2
Maximum Voltage	26.4 VDC
Minimum Voltage	20.4 VDC
Current Consumption Excluding Outputs	130mA
Maximum Current Consumption Total of the 4 Status Outputs	2A

Specialty Modules

P2-HSO (cont'd)

Status Inputs

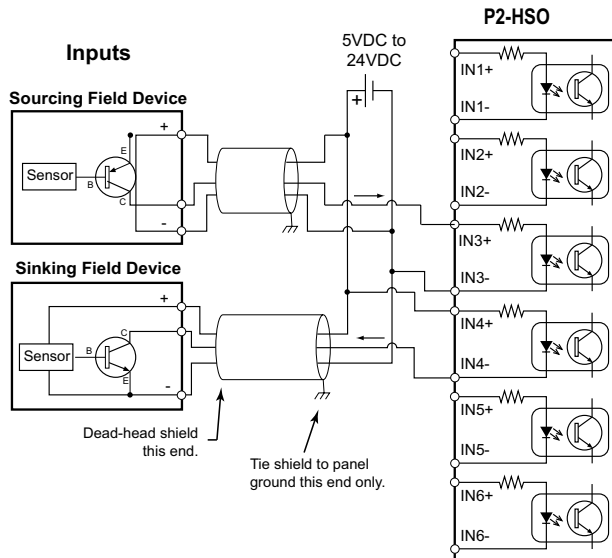


Status Input Specifications

Status Input	6 sink/source
Isolation	Each status input is individually isolated from all other circuits
Input Volts Range	5–24 VDC
Input Volts Maximum	34VDC, limited by protection
Input Impedance	1kΩ minimum, 5kΩ maximum
Inputs Rated Current	5–24 VDC, 16mA 5.2 mA typical @ 5VDC 22mA maximum @ 34VDC
Input Minimum ON Voltage	4.5 VDC
Input Maximum OFF Voltage	2.0 VDC
Input Minimum ON Current	5.0 mA
Input Maximum OFF Current	1.4 mA
OFF to ON Response Time	4μs
ON to OFF Response Time	4μs

Notes:

Mechanical contacts are not recommended to be used as counter or encoder inputs as they may cause unreliable readings. The bounce of mechanical contacts can cause the input to see more edges than intended.

Status Outputs

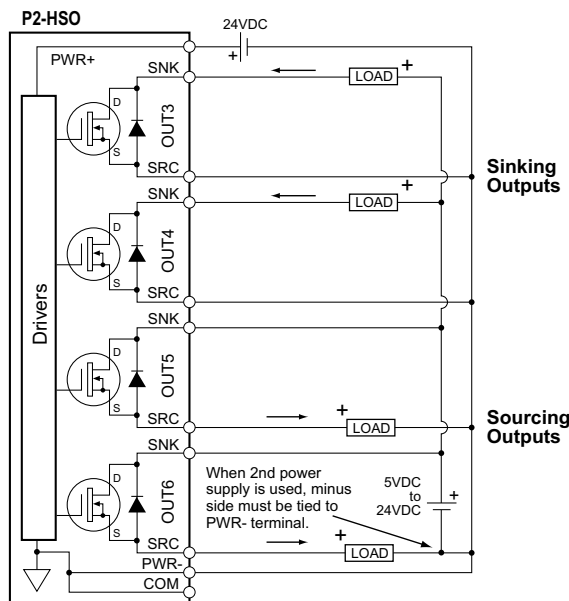

Status Output Specifications

Status Outputs	4 sink/source	
Output Signal Type, per Channel Select	Current Sinking	Current Sourcing
Operating Voltage²	5–24 VDC	5–24 VDC ²
Output Volts Maximum²	36VDC	26.4 VDC ²
Output Current Maximum	500mA	
Overcurrent Protection	Short circuit detect, overcurrent shutdown ¹	
Output Self Limiting Current	1.2 to 2.4 A	
Max Inrush Current	Self limited	
Output Voltage Drop	0.7 VDC @ 0.5 A	
Thermal Protection	Independent over temperature protection each output	
Output Voltage Clamp During Inductive Switching	+45VDC	-20VDC
Maximum OFF to ON Response	25μs ³	
Maximum ON to OFF Response	25μs ³	

Notes:

- Any fault shuts off the output. Fault is indicated and output is kept off until a new move start is received.
- Operating voltage for current sourcing outputs must be less or equal to the external power.
- Measured at 5VDC operating voltage, 0.5 A load.

Specialty Modules


P2-HSO (cont'd)

Pulse Output Specifications		
Pulse Outputs	2 Channels	
Output Pulse Type, per Channel Select	Selectable for pulse & direction, up/down or quadrature	
Output Signal Type, per Channel Select	RS-422 Line Driver Current Sinking and Sourcing	Open Drain FET Outputs Current Sinking
Output Volts	RS-422 levels	24VDC
Output Volts Maximum	5VDC	36VDC
Protection for Overcurrent and Short Circuit to Power	Current limit and thermal shutdown ²	Current limit and thermal shutdown ¹
Protection Short to Ground	Yes	Yes
Overcurrent Trip Level	Output current limit $\pm 200\text{mA max}^2$	100mA minimum
Maximum Continuous Output Current	$\pm 60\text{mA}$	40mA
Maximum Switching Frequency, 1m cable³	1MHz	500kHz
Maximum Switching Frequency, 10m cable³	1MHz	200kHz


NOTES:

1. Any fault shuts off the output. Fault is indicated and output is kept off until a new move start is received.
2. RS-422 thermal faults auto reset after device cool down.
3. Outputs are not limited to these speeds but single ended signals produced by the FETs are not usually reliable above these speeds due to cabling capacitance.

Sinking Pulse Outputs

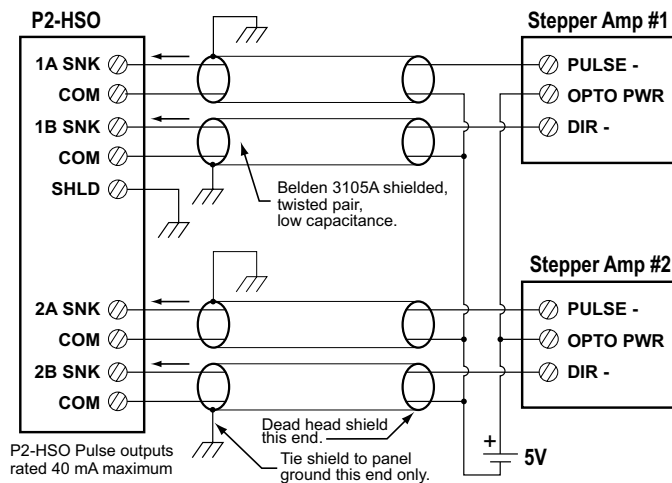


Line Driver Pulse Outputs

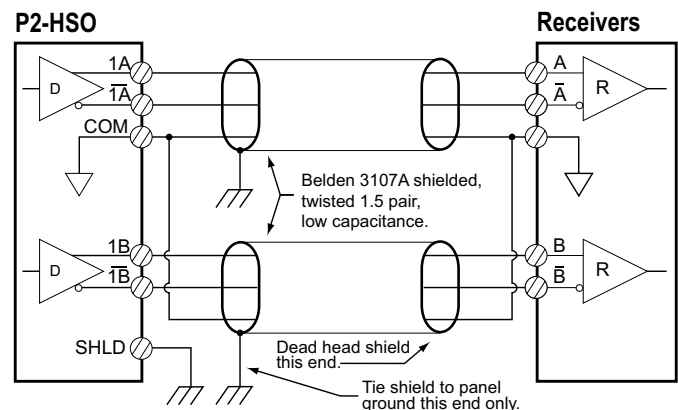


Specialty Modules

P2-HSO (cont'd)

SureServo Wiring Diagram

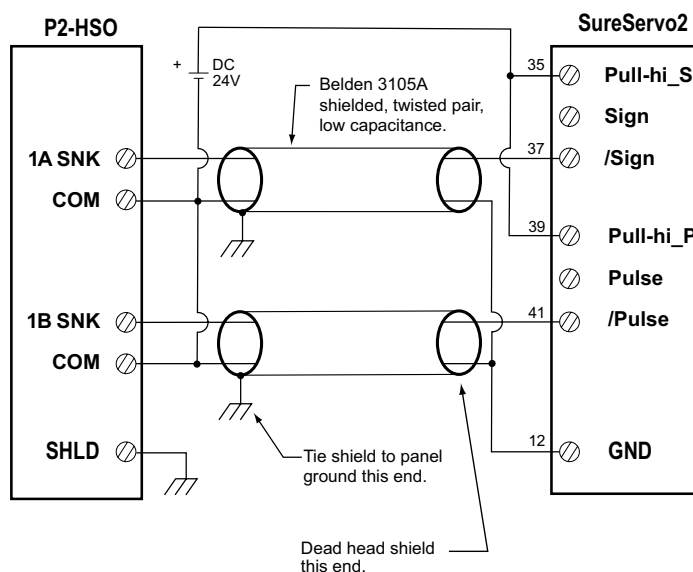


SureStep Wiring Diagram

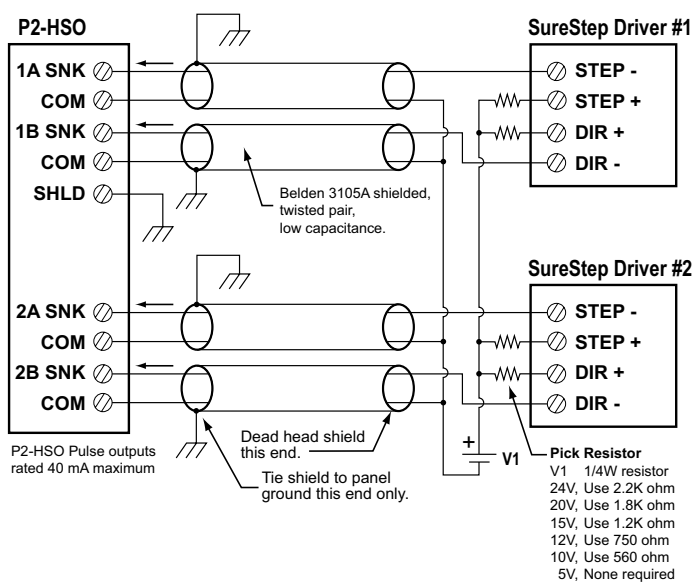

Specialty Modules

P2-HSO (cont'd)


Sinking I/O Wiring Diagram

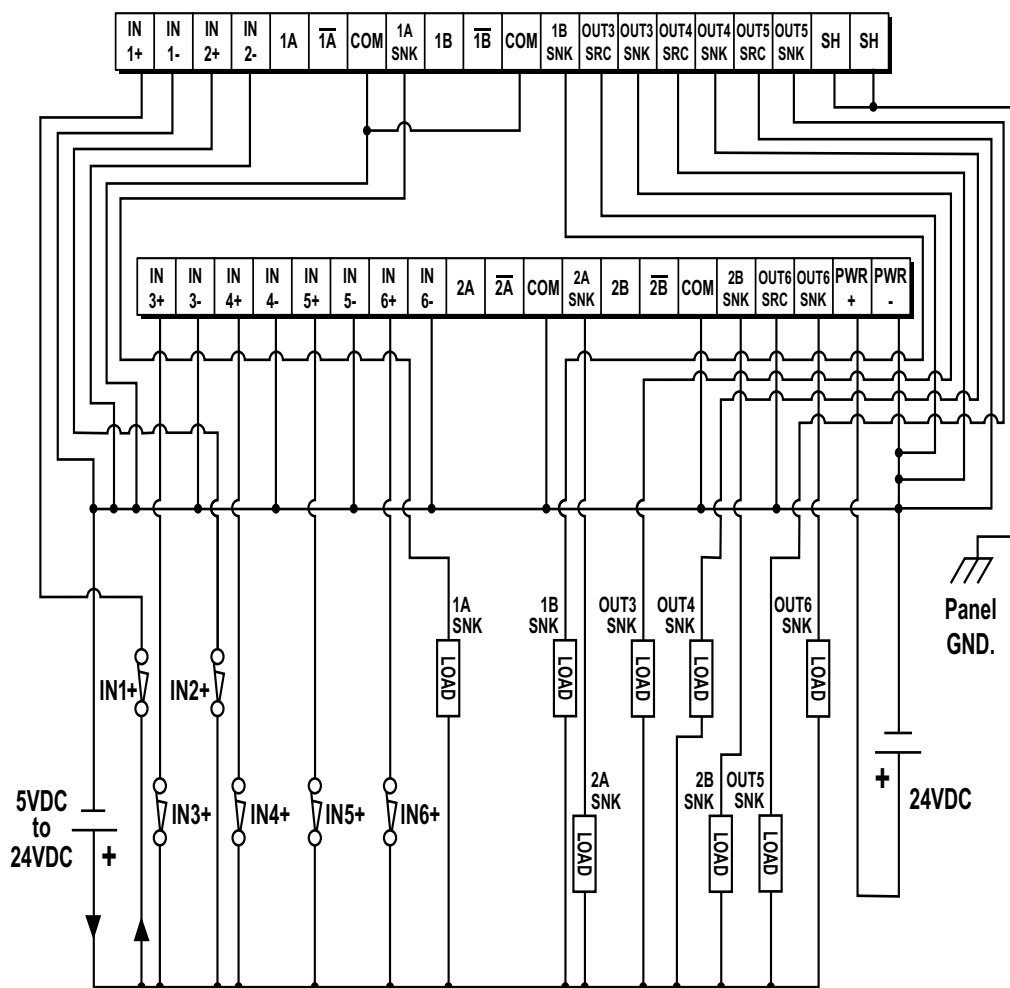

Specialty Modules

P2-HSO (cont'd)

Sourcing I/O Wiring Diagram

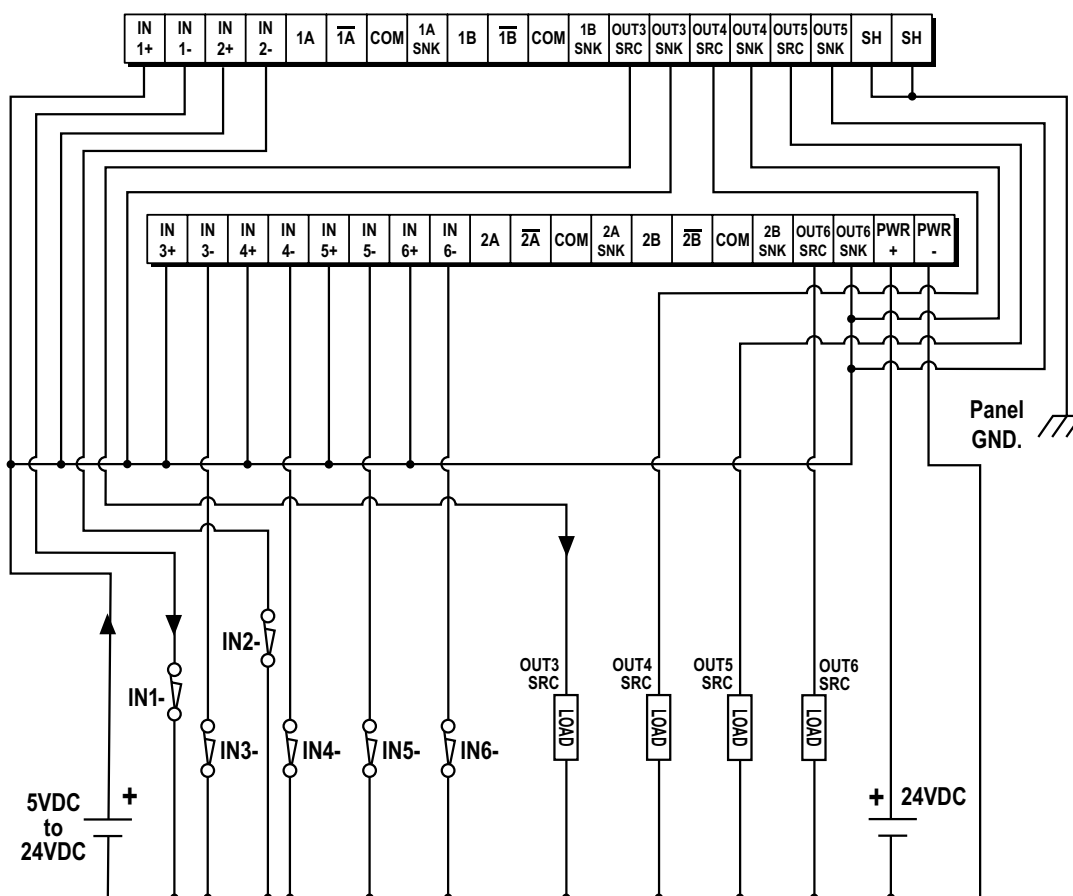

Resolution of Frequency Output Measurements

Output Frequency	Resolution
1kHz	0.01 Hz
10kHz	0.67 Hz
100kHz	67Hz
1MHz	6622Hz

Module Range: Target position range ± 2.147 billion (32-bit signed integer)

Inaccuracy of Output Frequency Due to Time Base Errors

25MHz Crystal for Time Base	
Inaccuracy at 25°C, Maximum	± 30 PPM
Inaccuracy 0–60°C, Referenced to 25°C	± 30 PPM
Inaccuracy Due to Aging, Maximum	± 5 PPM/Year
Max. Time Base Inaccuracy 0–60°C and 10 Years Operation	0.01%



Wiring Solutions

Wiring Solutions using the ZIPLink wiring system

ZIPLinks eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end and terminating wires at only one end. Prewired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the ZIPLink System ranging from

CPU I/O-to-ZIPLink Connector Modules that are ready for field termination, options for connecting to third party devices, GS Series, DuraPulse and SureServo Drives, and specialty relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for quick marking of ZIPLink modules are provided with ZIPLink cables. See the following solutions to help determine the best ZIPLink system for your application.

Solution 1: DirectLOGIC, CLICK, Productivity® 1000, Productivity® 2000 and Productivity3000® I/O Modules to ZIPLink Connector Modules

When looking for quick and easy I/O-to-field termination, a ZIPLink connector module used in conjunction with a prewired ZIPLink cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.



Use the CPU I/O Modules to ZIPLink Connector Modules selector tables located in the ZIPLink Wiring Solutions section to:

1. Locate your I/O module/CPU,
2. Select a ZIPLink Module, and
3. Select a corresponding ZIPLink Cable.

Solution 2: DirectLOGIC, CLICK, Productivity1000, Productivity2000 and Productivity3000 I/O Modules to 3rd Party Devices

When wanting to connect I/O to another device within close proximity of the I/O modules, no extra terminal blocks are necessary when using the ZIPLink Pigtail Cables. ZIPLink Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.



Use the I/O Modules to 3rd Party Devices selector tables located in the ZIPLink Wiring Solutions section to:

1. Locate your CPU I/O module, and
2. Select a ZIPLink Pigtail Cable that is compatible with your 3rd party device.

Solution 3: GS Series and DuraPulse Drives Communication Cables

Need to communicate via Modbus RTU to a drive or a network of drives?

ZIPLink cables are available in a wide range of configurations for connecting to CPUs, SureServo, SureStep, Stellar Soft Starter and AC drives. Add a ZIPLink communications module to quickly and easily set up a multi-device network.

Use the Drives Communication selector tables located in the ZIPLink Wiring Solutions section to:

1. Locate your Drive and type of communications, and
2. Select a ZIPLink cable and other associated hardware.





Wiring Solutions

Solution 4: Serial Communications Cables

ZIPLink offers communications cables for use with DirectLOGIC, CLICK, Productivity1000, Productivity2000 and Productivity3000 CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-Sub connectors which can be used in conjunction with the RJ12 or D-Sub Feedthrough modules.

Using the Serial Communications Cables selector table located in the ZIPLink Wiring Solutions section,

1. Locate your connector type
2. Select a cable.



Solution 5: Specialty ZIPLink Modules

For additional application solutions, ZIPLink Specialty Modules are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-Sub, RJ12 and RJ45 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the ZIPLink Specialty Modules selector table located in the ZIPLink Wiring Solutions section:

1. Locate the type of application.
2. Select a ZIPLink module.



Solution 6: ZIPLink Connector Modules to 3rd Party Devices

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color-coded soldered-tip wires are a good solution. Used in conjunction with any compatible ZIPLink Connector Modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Use the Universal Connector Modules and Pigtail Cables table located in the ZIPLink Wiring Solutions section to:

1. Select module type,
2. Select the number of pins
3. Select cable.





I/O Modules to ZIPLink Connector Modules - Productivity2000

Discrete Input Modules

Productivity2000 Input Module ZIPLink Selector					
I/O Input Module	ZIPLink Parameters				
	# of Terms	Component	Part No.	Cable Part No.	
<u>P2-08ND3-1</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>	<u>ZL-P2-CBL18 *</u>	
<u>P2-16ND3-1</u>	18	Sensor/LED	<u>ZL-LTB16-24-1</u>		
<u>P2-16ND-TTL</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>		
<u>P2-08NE3</u>					
<u>P2-16NE3</u>					
<u>P2-32ND3-1</u>	40	Feedthrough	<u>ZL-RTB40 (-1)</u>	<u>ZL-CBL40 *</u>	
		Sensor/LED	<u>ZL-LTB16-24-1</u>		
<u>P2-32NE3</u>	40	Feedthrough	<u>ZL-RTB40 (-1)</u>	<u>ZL-P2-CBL18 *</u>	
<u>P2-08NAS</u>	8	Feedthrough	<u>ZL-RTB20 (-1)</u>		
<u>P2-16NA</u>	18				

Discrete Output Modules

Productivity2000 Output Module ZIPLink Selector				
I/O Output Module	ZIPLink Parameters			
	# of Terms	Component	Part No.	Cable Part No.
<u>P2-08TD1S</u>	8	Feedthrough	<u>ZL-RTB20 (-1)</u>	<u>ZL-P2-CBL18 *</u>
<u>P2-08TD2S</u>	8			
<u>P2-15TD1</u>	15			
<u>P2-15TD2</u>	15			
<u>P2-08TD1P</u>	18			
<u>P2-16TD-TTL</u>	18			
<u>P2-08TD2P</u>	18			
<u>P2-08TRS</u>	18			
<u>P2-08TAS</u>	18			
<u>P2-16TA</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>	<u>ZL-P2-CBL18 *</u>
		Fuse	<u>ZL-RFU20 ²</u>	
<u>P2-16TD1P</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>	
		Relay (Sinking)	<u>ZL-RRL16-24-1</u>	
			<u>ZL-RRL16W-24-1</u>	
			<u>ZL-RRL16F-24-1</u>	
<u>P2-16TD2P</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>	
		Relay (Sourcing)	<u>ZL-RRL16-24-2</u>	
			<u>ZL-RRL16W-24-2</u>	
			<u>ZL-RRL16F-24-2</u>	
<u>P2-32TD1P</u>	32	Feedthrough	<u>ZL-RTB40 (-1)</u>	<u>ZL-CBL40 *</u>
<u>P2-32TD2P</u>	32			
<u>P2-16TR</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>	<u>ZL-P2-CBL18 *</u>
		Fuse	<u>ZL-RFU20 ²</u>	

Specialty Modules

Productivity2000 Specialty & Motion Modules ZIPLink Selector				
I/O Module	ZIPLink Parameters			
	# of Terms	Component	Part No.	Cable Part No.
<u>P2-HSI</u>	40	Feedthrough	<u>ZL-RTB40 (-1)</u>	<u>ZL-CBL40-S</u>
<u>P2-HSO</u>				<u>ZL-CBL40-1S</u> <u>ZL-CBL40-2S</u>
<u>P2-02HSC</u>	See Note 1			
<u>P2-04PWM</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>	<u>ZL-P2-CBL18</u> *
<u>P2-08SIM</u>	See Note 1			
<u>P2-SCM</u>	See Note 1			

* Select the cable length by replacing the * with: Blank = 0.5 m, -1 = 1.0 m, or -2 = 2.0 m.

1. These modules are not supported by the ZIPLink wiring system

2. Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits.

To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. [ZL-RFU20](#) = 2A per circuit; [ZL-RFU40](#) = 400 mA per circuit.





I/O Modules to ZIPLink Connector Modules - Productivity2000

Analog Input Modules

Productivity2000 Analog Input Module ZIPLink Selector				
I/O Analog Module	ZIPLink Parameters			
	# of Terms	Component	Part No.	Cable Part No.
<u>P2-04AD</u>	18	Feedthrough	<u>ZL-RTB20</u> (-1)	<u>ZL-P2-CBL18</u> *
<u>P2-04AD-1</u>				
<u>P2-04AD-2</u>				
<u>P2-08AD-1</u>				
<u>P2-08AD-2</u>				
<u>P2-08ADL-1</u>				
<u>P2-08ADL-2</u>				
<u>P2-16AD-1</u>	24			<u>ZL-P2-CBL24</u> *
<u>P2-16AD-2</u>				
<u>P2-16ADL-1</u>				
<u>P2-16ADL-2</u>				
<u>P2-06RTD</u>	Matched Only	See Note 1		
<u>P2-08THM</u>	T/C Wire Only	See Note 1		
<u>P2-08NTC</u>	Copper Conductors	See Note 1		

* Select the cable length by replacing the * with: Blank = 0.5 m, -1 = 1.0 m, or -2 = 2.0 m.

1. These modules are not supported by the ZIPLink wiring system.

Analog Output Modules

Productivity2000 Analog Output Module ZIPLink Selector				
I/O Analog Module	ZIPLink Parameters			
	# of Terms	Component	Part No.	Cable Part No.
<u>P2-04DA</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>	<u>ZL-P2-CBL18 *</u>
<u>P2-04DA-1</u>				
<u>P2-04DA-2</u>				
<u>P2-04DAL-1</u>				
<u>P2-04DAL-2</u>				
<u>P2-08DA-1</u>				
<u>P2-08DA-2</u>				
<u>P2-08DAL-1</u>	24	Feedthrough	<u>ZL-RTB20 (-1)</u>	<u>ZL-P2-CBL24 *</u>
<u>P2-08DAL-2</u>				
<u>P2-16DA-1</u>				
<u>P2-16DA-2</u>				
<u>P2-16DAL-1</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>	<u>ZL-P2-CBL18 *</u>
<u>P2-16DAL-2</u>				
<u>P2-8AD4DA-1</u>	18	Feedthrough	<u>ZL-RTB20 (-1)</u>	<u>ZL-P2-CBL18 *</u>
<u>P2-8AD4DA-2</u>				



I/O Modules

A variety of discrete, analog and specialty I/O modules are available for use in a Productivity2000 system. Specifications for each module are on the following pages.

A filler module is available for unused I/O module slots (part number [P2-FILL](#)).

Discrete Input Modules

Productivity2000 Discrete Input Modules			
Part Number	Number of Inputs	Description	Price
P2-08SIM	8	Input Simulator Module	\$69.00
P2-08ND3-1	8	Sinking/Sourcing 12-24 VDC	\$72.00
P2-16ND-TTL	16	Sinking/Sourcing	\$101.00
P2-16ND3-1	16	Sinking/Sourcing 24V AC/DC	\$100.00
P2-32ND3-1	32	Sinking/Sourcing 12-24 VDC	\$148.00
P2-08NE3	8	Sinking/Sourcing 24V AC/DC	\$59.00
P2-16NE3	16	Sinking/Sourcing 12-24 VDC	\$101.00
P2-32NE3	32	Sinking/Sourcing 24V AC/DC	\$148.00
P2-08NAS	8	AC Isolated 100-120 VAC	\$113.00
P2-16NA	16	AC 100-240 VAC	\$154.00

Specialty Modules

Productivity2000 Specialty Modules			
Part Number	Number of Channels	Description	Price
P2-HSI	2	High-Speed Input	\$288.00
P2-HSO**	2	High-Speed Output	\$288.00
P2-02HSC	2	High-Speed Counter	\$120.00
P2-04PWM	4	Pulse-Width Modulation	\$132.00
P2-SCM	4 ports	Serial Communications Module	\$242.00

** ZIFLink required.

Analog Output Modules

Productivity2000 Analog Output Modules			
Part Number	Number of Channels	Description	Price
P2-04DA	4	Analog Output (Voltage/Current)	\$286.00
P2-04DA-1	4	Analog Output (Current)	\$217.00
P2-04DA-2	4	Analog Output (Voltage)	\$212.00
P2-04DAL-1*	4	Analog Output (Current)	\$162.00
P2-04DAL-2*	4	Analog Output (Voltage)	\$151.00
P2-08DA-1	8	Analog Output (Current)	\$398.00
P2-08DA-2	8	Analog Output (Voltage)	\$365.00
P2-08DAL-1*	8	Analog Output (Current)	\$297.00
P2-08DAL-2*	8	Analog Output (Voltage)	\$288.00
P2-16DA-1	16	Analog Output (Current)	\$521.00
P2-16DA-2	16	Analog Output (Voltage)	\$499.00
P2-16DAL-1*	16	Analog Output (Current)	\$371.00
P2-16DAL-2*	16	Analog Output (Voltage)	\$355.00

* Low resolution analog modules without OLED display.

Discrete Output Modules

Productivity2000 Discrete Output Modules			
Part Number	Number of Outputs	Description	Price
P2-08TD1S	8	Isolated Sinking	\$70.00
P2-08TD2S	8	Isolated Sourcing	\$70.00
P2-15TD1	15	Sinking	\$97.00
P2-15TD2	15	Sourcing	\$95.00
P2-08TD1P	8	Sinking Protected	\$60.00
P2-08TD2P	8	Sourcing Protected	\$60.00
P2-16TD-TTL	16	Sourcing	\$116.00
P2-16TD1P	16	Sinking Protected	\$101.00
P2-16TD2P	16	Sourcing Protected	\$101.00
P2-32TD1P	32	Sinking Protected	\$148.00
P2-32TD2P	32	Sourcing Protected	\$148.00
P2-08TAS	8	Isolated AC	\$154.00
P2-16TA	16	100-240 VAC Output	\$190.00
P2-06TRS	6	Isolated Relay	\$111.00
P2-08TRS	8	Isolated Relay	\$73.00
P2-16TR	16	Relay	\$137.00

Analog Input Modules


Productivity2000 Analog Input Modules			
Part Number	Number of Channels	Description	Price
P2-04AD	4	Analog Input (Voltage/Current)	\$288.00
P2-04AD-1	4	Analog Input (Current)	\$217.00
P2-04AD-2	4	Analog Input (Voltage)	\$224.00
P2-08AD-1	8	Analog Input (Current)	\$303.00
P2-08AD-2	8	Analog Input (Voltage)	\$333.00
P2-08ADL-1*	8	Analog Input (Current)	\$212.00
P2-08ADL-2*	8	Analog Input (Voltage)	\$230.00
P2-16AD-1	16	Analog Input (Current)	\$366.00
P2-16AD-2	16	Analog Input (Voltage)	\$406.00
P2-16ADL-1*	16	Analog Input (Current)	\$261.00
P2-16ADL-2*	16	Analog Input (Voltage)	\$289.00
P2-06RTD	6	Analog RTD Input	\$476.00
P2-08NTC	8	Analog Thermocouple Input	\$424.00
P2-08THM	8	Analog Thermistor Input	\$468.00

Productivity2000 Analog Input/Output Modules			
Part Number	Number of Channels	Description	Price
P2-8AD4DA-1	8/4	Analog Input/Output (Current)	\$456.00
P2-8AD4DA-2	8/4	Analog Input/Output (Voltage)	\$456.00


I/O Module Installation Procedure

WARNING: DO NOT APPLY FIELD POWER UNTIL THE FOLLOWING STEPS ARE COMPLETED. SEE HOT-SWAP PROCEDURE FOR EXCEPTIONS.

Step One: Align module catch with base slot and module into connector.



Step Two: Pull top locking tab toward module face. Click indicates lock is engaged.

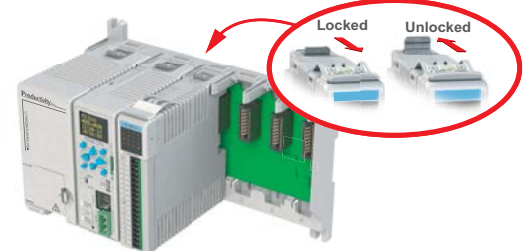

Step Three: Attach field wiring using removable terminal block or ZIPLink wiring system.



WARNING: EXPLOSION HAZARD – DO NOT CONNECT OR DISCONNECT CONNECTORS OR OPERATE SWITCHES WHILE CIRCUIT IS LIVE UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS. DO NOT HOT-SWAP MODULES UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS.