

# Suremotion Shaft Supports

## Low Profile - Aluminum




### Features

- Removable top design allows easy removal of shaft
- Maintains alignment while servicing shafts and bearings
- Lowest base to shaft height available
- Parallel and perpendicular surfaces for easy alignment
- Material: Aluminum - 6061 T6 Gray, Hard Anodized
- Fasteners: Alloy Steel, Black Oxide
- Superior shaft holding strength



Low Profile Aluminum Shaft Supports									
Part Number	Measurement	ØE	A	B	C	D	HSCS Screw Size	Price	Weight (lb)
<b>TMSSL-04</b>	inches	0.250	0.87	0.562	1.63	0.38	#6	\$9.75	0.04
<b>TMSSL-06</b>		0.375	1.00	0.625	1.75	0.38		\$10.50	0.04
<b>TMSSL-08</b>		0.500	1.19	0.750	2.00	0.50		#8	\$14.00
<b>TMSSL-10</b>		0.625	1.44	0.938	2.63	0.50	#10	\$15.50	0.11
<b>TMSSL-12</b>		0.750	1.56	1.000	2.75	0.50		\$16.50	0.12
<b>TMSSL-16</b>		1.000	1.94	1.250	3.19	0.75	1/4	\$20.50	0.27
<b>TMSSL-20</b>		1.250	2.31	1.500	3.75	0.75	5/16	\$25.00	0.37
<b>TMSSL-24</b>		1.500	2.69	1.750	4.00	0.75		\$28.00	0.45
<b>TMSSL-32</b>		2.000	3.31	2.125	5.00	1.25		3/8	\$37.50
<b>TMSSL-08M</b>		mm	8.0	21.0	12.0	44.0	10.0	M4	\$13.50
<b>TMSSL-10M</b>	10.0		25.0	14.0	46.0	12.0	\$16.50		0.05
<b>TMSSL-12M</b>	12.0		25.0	14.0	48.0	12.0	\$18.50		0.05
<b>TMSSL-16M</b>	16.0		31.0	18.0	62.0	13.0	M5	\$20.50	0.10
<b>TMSSL-20M</b>	20.0		36.0	22.0	65.0	13.0		\$23.50	0.12
<b>TMSSL-25M</b>	25.0		44.0	27.0	80.0	16.0	M6	\$27.00	0.20
<b>TMSSL-30M</b>	30.0		52.0	32.0	96.0	20.0	M8	\$33.50	0.35
<b>TMSSL-35M</b>	35.0		60.0	34.0	100.0	20.0		\$36.50	0.41
<b>TMSSL-40M</b>	40.0		66.0	40.0	108.0	22.0		\$39.50	0.53
<b>TMSSL-50M</b>	50.0		75.0	45.0	120.0	22.0		\$43.50	0.66

### Dimensions

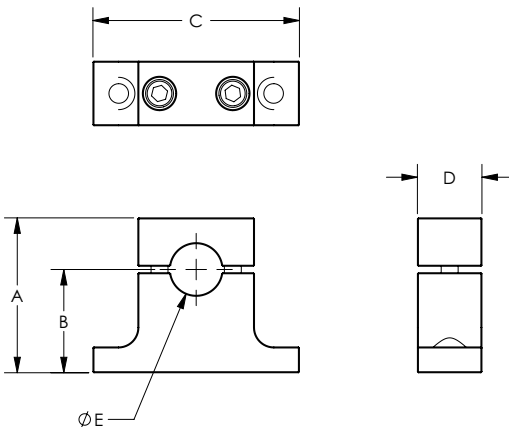

Standard Steel Bolt/Screw Torque Specifications				
Bolt/Screw			Torque*	
Size	Pitch	Type	lb-in	lb-ft
6	32	Low Carbon Steel	8.7	-
8	32		17.8	
10	24		20.8	
1/4	20	SAE Grade 5 Med. Carbon Steel	-	10
5/16	18		-	19
3/8	16		-	33
7/16	14		-	54
1/2	13		-	78

\* It is recommended to use 50% of listed torque when using steel threads into aluminum material.

Metric Steel Bolt/Screw Torque Specifications			
Bolt/Screw			Torque*
Size	Pitch	Type	N-m
M3	0.5	Standard 5D Med. Carbon Steel	0.6
M4	0.7		1.5
M5	0.8		3.0
M6	1.0		5.2
M8	1.25		12.5
M10	1.50		24.0

\* It is recommended to use 50% of listed torque when using steel threads into aluminum material.

See our website [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete Engineering drawings.