

FlatSIGN Signal Lights

WERMA FlatSIGN Features


- Industrial signal light
- Red/Yellow/Green LEDs
- Permanent or blinking (DIP switch selectable)
- 160-degree viewing angle
- Wall mount installation
- Audible alert option with 8 DIP switch-selectable tones (DC models) or continuous (AC models)
- 2 year warranty



691 Series FlatSIGN Technical Specifications												
Description	Voltage	Part Number	Price	Housing Color	Current	Operating Temp /Protection	Life Duration	Housing Material	Weight	Wiring Diagram	Connection	Agency Approval
Base Mount												
Permanent or blinking LED	24V AC/DC	69110055	\$132.00	Transparent	30mA per tier	-30°C - +50°C (-22°F - +122°F) IP65 when mounted	max. 50,000h	PC transparent or coated cap/ PC/ABS blend housing	230g [8.11 oz]	Diagram 1	Membrane grommet Cable diameter max. 13mm	UL file E164155, CE, RoHS
		69130055	\$187.00	Silver								
	115-230 VAC	69110068	\$132.00	Transparent								
		69130068	\$187.00	Silver								
Permanent or blinking LED Audible alert (8 selectable tones, 80dB at 1 meter)	24V AC/DC	69120055	\$159.00	Transparent	30mA per tier	-30°C - +50°C (-22°F - +122°F) IP65 when mounted	max. 50,000h	PC transparent or coated cap/ PC/ABS blend housing	235g [8.29 oz]	Diagram 2	Terminal screw 0.5 -1.5 mm ²	UL file E164155, CE, RoHS
		69140055	\$221.00	Silver								
Permanent or blinking LED Audible alert (continuous tone, 80dB at 1 meter)	115-230 VAC	69120068	\$159.00	Transparent								
		69140068	\$221.00	Silver								

Note: Refer to insert for audible tone frequencies.

Dimensions mm [in]

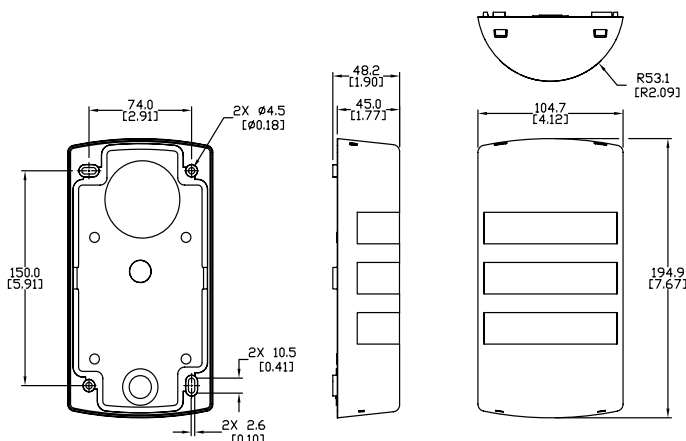

691xxxx

Schematics

Diagram 1




Diagram 2

