

# PATLITE® Signal Devices

## 56mm Industrial Signal Beacon Monocolor NE-A Series

### Overview

NE-A series monocolor beacons are offered in five different LED colors (Red, Amber, Green, Blue, and White). The reflector is designed to distribute light for clear, unambiguous indication.

### Features

- Choose from 5 LED color options (Red, Amber, Green, Blue, and White)
- Newly developed reflector emits evenly distributed light, for clear, unambiguous indication
- High protection rating for operation in harsh environments
- Gasket included



**NE-24A-G**




56mm Industrial Signal Beacon Monocolor NE-A Series Selection Chart							
Part Number	Price	LED Color	Type	Light Function	Voltage	Drawing Link	Connection
<a href="#">NE-24A-R</a>	\$32.00	Red	Industrial signal beacon	Continuous	24VDC ± 10%	<a href="#">PDF</a>	Screwless terminal block
<a href="#">NE-24A-Y</a>	\$32.00	Amber				<a href="#">PDF</a>	
<a href="#">NE-24A-G</a>	\$32.00	Green				<a href="#">PDF</a>	
<a href="#">NE-24A-B</a>	\$32.00	Blue				<a href="#">PDF</a>	
<a href="#">NE-24A-C</a>	\$32.00	White				<a href="#">PDF</a>	


### Wiring Diagrams

Wiring examples vary depending on the driving method.


(A) External Contact Drive

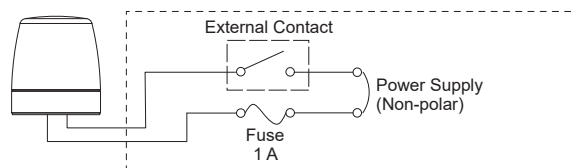

(B) I/O Unit Drive (NPN Transistor)

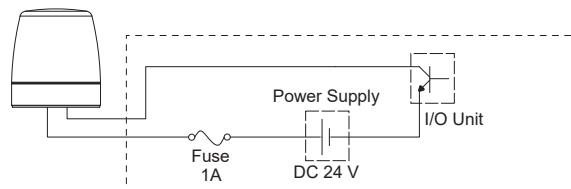

(C) I/O Unit Drive (PNP Transistor)

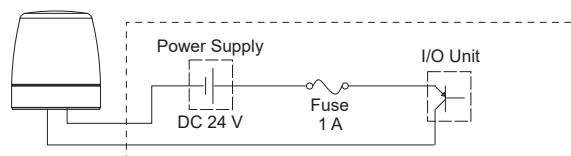

[ Fuse ]

Fuse Rating	250 V 1 A
-------------	-----------

[ External Contact Capacity ]

Current Capacity	$I_s \geq 50 \text{ mA}$
Voltage Capacity	$V_s \geq 35 \text{ V}$

[ Transistor (NPN or PNP) ]

Current Capacity	$I_c \geq 50 \text{ mA}$
Withstand Voltage	$V_c \geq 35 \text{ V}$
Leakage Current	$I_L \leq 0.1 \text{ mA}$

\*No significant inrush current present

# **PATLITE**® Signal Devices

## 56mm Industrial Signal Beacon Monocolor NE-A Series

### Specifications

56mm Industrial Signal Beacon Monocolor NE-A Series Technical Specifications		
<b>Rated Voltage</b>	24VDC	
<b>Operating Voltage Range</b>	24VDC ±10%	
<b>Rated Current Consumption</b>	<i>Typical</i>	22mA
	<i>Max</i>	26mA
<b>Rated Power Consumption</b>	<i>Typical</i>	0.6 W
	<i>Max</i>	0.7 W
<b>Temperature Range</b>	<i>Operating</i>	-30 to 50°C [-22 to 122°F]
	<i>Storage</i>	-40 to 75°C [-40 to 167°F]
<b>Humidity Range</b>	<i>Operating</i>	Less than 90% (no condensation)
	<i>Storage</i>	
<b>Mounting</b>	Indoor, any direction	
<b>Insulation Resistance</b>	More than 5MΩ at 500VDC between live part and non-current carrying metallic part	
<b>Withstand Voltage</b>	500VAC applied for 1 min between live part and non-current carrying metallic part without breaking insulation	
<b>Wire Size</b>	Solid wire 0.2 mm <sup>2</sup> – 1.5mm <sup>2</sup> , Stranded wire 24–16 AWG	
<b>Protection Rating</b>	IP65, NEMA 4X, 13	
<b>Weight g [oz]</b>	60 [2.11] ± 10%	
<b>Housing Material</b>	Polycarbonate	
<b>Agency Approval</b>	UL 508, UR File: E215660, CSA-C22.2 No. 15	

To obtain the most current agency approval information, see the Agency Compliance & Certifications Checklist section on the specific part number's web page.

# PATLITE® Signal Devices

## 56mm Audible-Visual and Industrial Signal Beacon Multicolor NE-A Series

### Overview

The NE-A series of multicolor beacons features up to 7 selectable LED colors (Red, Amber, Green, Blue, White, Cyan, and Purple). These beacons feature simultaneous use of continuous or flashing conditions.

### Features

- Capacitive touch sensor enables real-time status confirmations available on 1 unit
- Features simultaneous use of continuous, flashing, and audible alarm conditions
- Up to 7 selectable LED colors (Red, Amber, Green, Blue, White, Cyan, and Purple)
- High protection rating for operation in harsh environments




### 56mm Audible-Visual and Industrial Signal Beacon Multicolor NE-A Series Selection Chart

Part Number	Price	Type	Bulb Type	Light Function	Light Colors	Voltage	Tone Type	Tone Frequency	Touch To Silence	Drawing Link	Connection
<a href="#"><u>NE-M1ANB-M</u></a>	\$89.00	Audible-visual signal beacon	Integrated LED	Continuous or flashing (500ms)	Red/Amber/ Green/ Blue/White/ Cyan/ Purple	12–24 VDC	Continuous/ intermittent 88db at 1m	2.5 kHz	No	<a href="#"><u>PDF</u></a>	2m [6.56 ft] cable with pigtail
<a href="#"><u>NE-M1ACNB-M</u></a>	\$105.00			Continuous		12–24 VDC			No	<a href="#"><u>PDF</u></a>	5-pin M12 connector *
<a href="#"><u>NE-M1ANN-M</u></a>	\$69.00	Industrial signal beacon	LED	Continuous or flashing (500ms)		12–24 VDC	N/A	N/A	N/A	<a href="#"><u>PDF</u></a>	2m [6.56 ft] cable with pigtail
<a href="#"><u>NE-M1ACNN-M</u></a>	\$82.50			Continuous		12–24 VDC				<a href="#"><u>PDF</u></a>	5-pin M12 connector *
<a href="#"><u>NE-M1ATB-M</u></a>	\$115.00	Audible-visual signal beacon	Integrated LED	Continuous		12–24 VDC	Continuous/ intermittent 88db at 1m	2.5 kHz	Yes	<a href="#"><u>PDF</u></a>	2m [6.56 ft] cable with pigtail


\* Requires a 5-pin female M12 cable, sold separately.

### M12 5-pin Connector

**NE-M1ACNB-M**



**NE-M1ACNN-M**

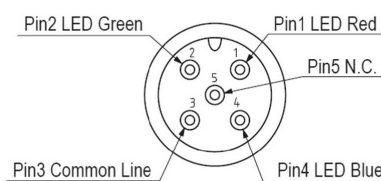

# PATLITE® Signal Devices

## 56mm Audible-Visual and Industrial Signal Beacon Multicolor NE-A Series

### Specifications

56mm Audible-Visual and Industrial Signal Beacon Multicolor - NE-A Series Specifications						
Model		NE-M1ANB-M	NE-M1ACNB-M	NE-M1ANN-M	NE-M1ACNN-M	NE-M1ATB-M
Rated Voltage		12-24 VDC				
Operating Voltage Range		10-30 VDC				
Rated Current Consumption	Typical	12VDC	80mA	55mA	80mA	
		24VDC	65mA	45mA	65mA	
	Max	12VDC	95mA	65mA	95mA	
		24VDC	70mA	50mA	70mA	
Rated Power Consumption	Typical	12VDC	1.0 W	0.7 W	1.0 W	
		24VDC	1.6 W	1.1 W	1.6 W	
	Max	12VDC	1.2 W	0.8 W	1.2W	
		24VDC	1.8 W	1.2 W	1.8 W	
Standby Current		Less than 20mA				
Inrush Current		Less than 0.4 A / 2msec				
Temperature Range	Operating	-25 to 60°C [-13 to 140°F]				
	Storage	-40 to 75°C [-40 to 167°F]				
Humidity Range	Operating	Less than 90% (no condensation)				
	Storage					
Mounting		Indoor, any direction				
Insulation Resistance		More than 5MΩ at 500VDC between live part and non-current carrying metallic part				
Withstand Voltage		1 min at 500VAC between charging parts and non-charging metal parts				
Wire Size		24AWG	-	24AWG	-	24AWG
Protection Rating		IP65, NEMA Type 4X,13		IP67, NEMA Type 4X,13	IP67/IP69K	IP65, NEMA Type 4X,13
Weight g [oz]		170 [5.99]	100 [3.52]	150 [5.29]	90 [3.17]	170 [5.99]
Housing Material		Polycarbonate				
Agency Approval		UL 508, UR File: E215660, CSA-C22.2 No. 15				

To obtain the most current agency approval information, see the Agency Compliance & Certifications Checklist section on the specific part number's web page.




# PATLITE® Signal Devices


## 56mm Audible-Visual and Industrial Signal Beacon Multicolor NE-A Series

### Wiring Diagrams


#### NE-M1ANN-M, NE-M1ANB-M

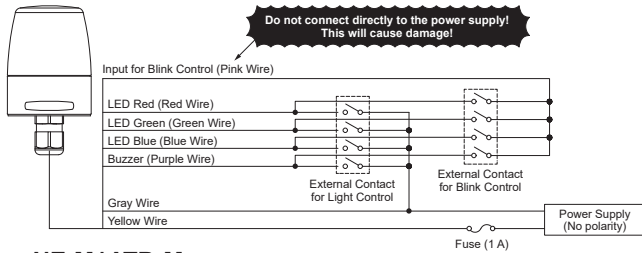

#### NE-M1ACNB-M

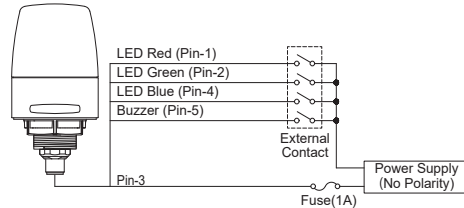


#### NE-M1ATB-M

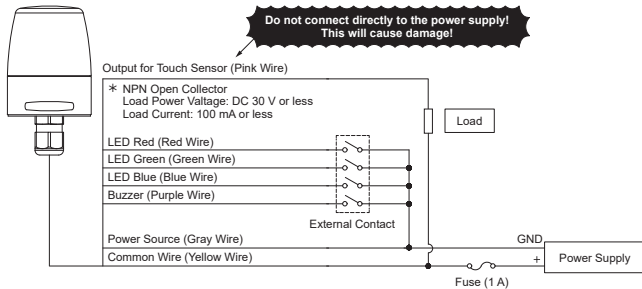

LED Color	Red	Green	Blue	Yellow	Cyan	Purple	White
Pin No.	1	2	4	1+2	2+4	1+4	1+2+4

< NOTE > Be sure to insulate all unconnected lead wires one by one. Otherwise, electric shock or short circuit may occur.

#### NE-M1ACNN-M

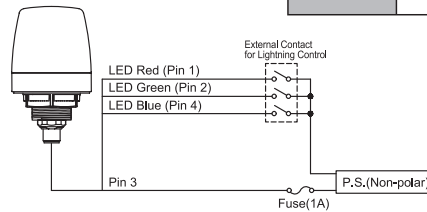

LED Color	Red	Green	Blue	Yellow	Cyan	Purple	White
M12 Connector Pin No.	①	②	④	① + ②	② + ④	① + ④	① + ② + ④

LED Color	Red	Green	Blue	Yellow	Cyan	Purple	White
Wiring	Red	Green	Blue	Red + Green	Blue + Green	Red + Blue	Red + Green + Blue

< NOTE > No need to connect the buzzer (purple wire) for NE-M1ANN-M. When the blink control is not necessary for NE-M1ANN-M/NE-M1ANB-M, no need to connect the blink control (pink wire). Be sure to insulate all unconnected lead wires one by one. Otherwise, electric shock or short circuit may occur.

#### [ Fuse ]

Fuse Rating	250 V 1 A
-------------	-----------

#### [ External Contact Capacity ]

Current Capacity	Is ≥ 50 mA
Voltage Capacity	Vs ≥ 35 V
Leakage Current	IL ≤ 0.1 mA

\* Inrush current: 15 A / 0.1 ms  
\* Signal response time: 50 ms

#### [ Fuse ]

Fuse Rating	250V1A
-------------	--------

#### [ External Contact Capacity ]

Current Capacity	Is ≥ 50mA
Voltage Capacity	Vs ≥ 35V
Leakage Current	IL ≤ 0.1mA

# PATLITE® Signal Devices

## 56mm Audible-Visual and Industrial Signal Beacon Multicolor IO-Link NE-IL Series

### Overview

The NE-IL series is designed with a multicolored LED that can display up to 7 selectable LED colors (Red, Amber, Green, Blue, White, Cyan, and Purple), enabling users to color-code different statuses and equipment conditions. Two parts offer touch to acknowledge. The NE-IL series beacons are compatible with IO-Link v1.1.

### Features


- Capacitive touch sensor enables real-time status confirmations
- Features simultaneous use of continuous, flashing, and audible alarm conditions
- Toggle between 4 patterns (Red, Blue, White, or off) while in touch sensor mode
- High protection rating for operation in harsh environments
- M12 connector available for quick and easy wiring
- IO-Link v1.1




56mm Audible-Visual and Industrial Signal Beacon Multicolor IO-Link NE-IL Series Selection Chart											
Part Number	Price	Type	Bulb Type	Light Function	Light Colors	Voltage	Tone Type	Tone Frequency	Touch To Acknowledge	Drawing Link	Connection*
<a href="#">NE-ILNB-M</a>	\$119.00	Audible-visual signal beacon	Integrated LED	Selectable permanent, flashing, double flash, triple flash	Red/Amber/ Green/Blue/ White/Cyan/ Purple	24VDC	(8) selectable 88db at 1m	2.5 kHz	No	<a href="#">PDF</a>	5-pin M12 connector A-coded
<a href="#">NE-ILNN-M</a>	\$99.00	Industrial signal beacon	LED			24VDC	—	—	No	<a href="#">PDF</a>	
<a href="#">NE-ILTB-M</a>	\$147.00	Audible-visual signal beacon	Integrated LED			24VDC	(8) selectable 88db at 1m	2.5 kHz	Yes	<a href="#">PDF</a>	
<a href="#">NE-ILTN-M</a>	\$136.00	Industrial signal beacon	LED			24VDC	—	—	Yes	<a href="#">PDF</a>	

\* Requires a 5-pin female M12 cable, sold separately.

### Wiring Diagram

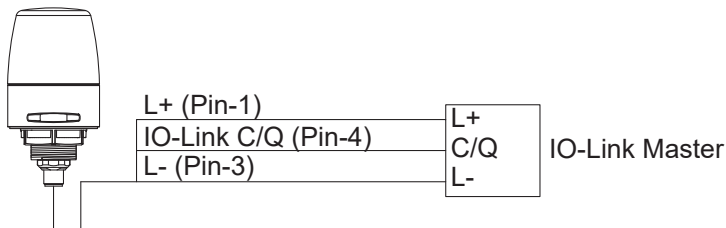

### M12 5-pin Connector

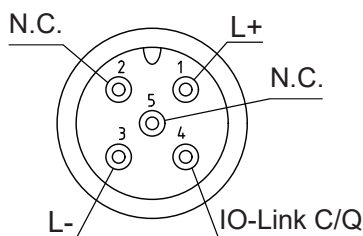

# PATLITE® Signal Devices

## 56mm Audible-Visual and Industrial Signal Beacon Multicolor IO-Link NE-IL Series

### Specifications

56mm Audible-Visual and Industrial Signal Beacon Multicolor IO-Link NE-IL Series Specifications					
Model		<i>NE-ILNB-M</i>	<i>NE-ILNN-M</i>	<i>NE-ILTB-M</i>	<i>NE-ILTN-M</i>
<b>Rated Voltage</b>		24VDC			
<b>Operating Voltage Range</b>		18–30 VDC			
<b>Rated Current Consumption</b>	<i>Typical</i>	80mA	40mA	80mA	40mA
	<i>Max</i>	100mA	50mA	100mA	50mA
<b>Rated Power Consumption</b>	<i>Typical</i>	2.0 W	1.0 W	2.0 W	1.0 W
	<i>Max</i>	2.4 W	1.2 W	2.4 W	1.2 W
<b>Inrush Current</b>		10A / 0.2 msec			
<b>Temperature Range</b>	<i>Operating</i>	-25 to 60°C [-13 to 140°F]			
	<i>Storage</i>	-40 to 75°C [-40 to 167°F]			
<b>Humidity Range</b>	<i>Operating</i>	Less than 90% (no condensation)			
	<i>Storage</i>				
<b>Mounting</b>		Indoor, vertical			
<b>Insulation Resistance</b>		More than 5MΩ at 500VDC between live part and non-current carrying metallic part			
<b>Withstand Voltage</b>		1 min at 500VAC between charging parts and non-charging metal parts			
<b>Protection Rating</b>		IP65, NEMA TYPE 4X, 13			
<b>Weight g [oz]</b>		100 [3.52]	90 [3.17]	100 [3.52]	90 [3.17]
<b>Housing Material</b>		Polycarbonate			
<b>Agency Approval</b>		UL 508, UR File: E215660, CSA-C22.2 No. 14			


To obtain the most current agency approval information, see the Agency Compliance & Certifications Checklist section on the specific part number's web page.

IO-Link Specifications	
<b>IO-Link</b>	v1.1
<b>Port Speed</b>	COM2 (38.4 kpbs)
<b>SIO Supported</b>	Yes
<b>ISDU Supported</b>	Yes
<b>Data Storage</b>	Yes
<b>Block Parameter</b>	Yes

# PATLITE® Signal Devices

## 56mm Visual-Audible and Industrial Signal Beacon Accessories NE-A and NE-IL Series

56mm Beacon Accessories NE-A and NE-IL Series				
Part Number	Price	Description	Weight g [oz]	Drawing Link
<a href="#"><u>NE-002D</u></a>	\$12.00	Patlite mounting bracket, wall mount, 56mm diameter, 82mm height, dark gray, polycarbonate. For use with Patlite NE-A and NE-IL series beacons.	34 [1.19]	<a href="#">PDF</a>
<a href="#"><u>NE-001D</u></a>	\$18.00	Patlite tube adapter, tube mount, 56mm diameter, black, polycarbonate. For use with Patlite NE-A and NE-IL series beacons.	31 [1.09]	<a href="#">PDF</a>
<a href="#"><u>SZP-092D</u></a>	\$6.50	Patlite tube adapter, tube mount, 1/2in NPT thread type, 56mm diameter, black, polycarbonate. For use with Patlite NE-A and NE-IL series beacons.	23 [0.81]	<a href="#">PDF</a>
<a href="#"><u>GA0000119-F1</u></a>	\$10.00	Patlite O-ring, silicone. For use with Patlite NE-A and NE-IL series beacons.	45.35 [1.5]	N/A
<a href="#"><u>POLE-100A21</u></a>	\$25.00	Patlite mounting pole, 22mm diameter, 100mm length, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	29 [1.02]	<a href="#">PDF</a>
<a href="#"><u>POLE-300A21</u></a>	\$28.00	Patlite mounting pole, 22mm diameter, 300mm length, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	86 [3.03]	<a href="#">PDF</a>
<a href="#"><u>POLE-800A21</u></a>	\$35.00	Patlite mounting pole, 22mm diameter, 800mm length, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	228 [8.04]	<a href="#">PDF</a>
<a href="#"><u>SZ-010</u></a>	\$25.00	Patlite mounting bracket, flange mount, 100mm diameter, 65mm height, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	122 [4.30]	<a href="#">PDF</a>
<a href="#"><u>SZ-016A</u></a>	\$28.00	Patlite mounting bracket, flange mount, 68mm diameter, 45mm height, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	96 [3.38]	<a href="#">PDF</a>

[NE-002D](#)[NE-001D](#)[SZP-092D](#)[GA0000119-F1](#)[POLE-100A21](#)[SZ-010](#)[SZ-016A](#)

# WERMA **EvoSIGNAL** Overview

SIGNALTECHNIK

## Description

Signal devices warn, guide and protect. The type of visual and audible signals used depends on the application and the surroundings. With EvoSIGNAL, it is easier than ever before to find the signal device you need: the streamlined, modular system optimally covers practically all areas of application.

## TwinLIGHT and TwinFLASH

TwinLIGHT and TwinFLASH merge two lighting functions in one element that can then be remotely operated and even configured to suit different escalation levels.

TwinLIGHT - Permanent and Blinking Lights

TwinFLASH - Flash and EVS (enhanced visibility system)

## Modular Beacons

EvoSIGNAL is the new modular, simple and clear standard solution for the signaling sector.

- High protection rating IP66
- 62, 85, 120mm beacons available
- Signal modules in common voltages (115–230 VAC, 12/24 VAC/VDC, 12 VAC/VDC, 24 VAC/VDC)
- Five colors available

## Beacon Accessories

Accessories for installation and freestanding beacons:

- Base mounting
- M22 installation mounting
- PG29 installation mounting
- Tube mounting
- Bracket mounting with cable gland
- Bracket mounting



Mini



Midi




Maxi

# Select your WERMA EvoSIGNAL Device

## STEP 1

Select height/diameter for your application.

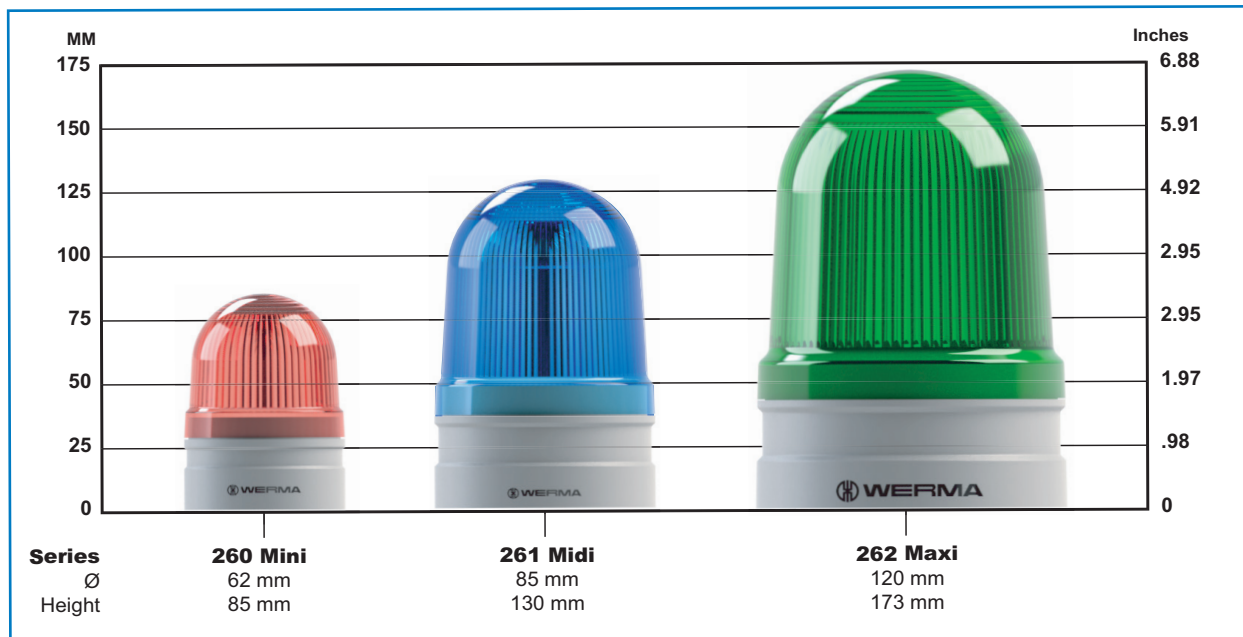




# Select your WERMA EvoSIGNAL Device

## STEP 2

Select your mounting adapter for the appropriate series of beacon selected.

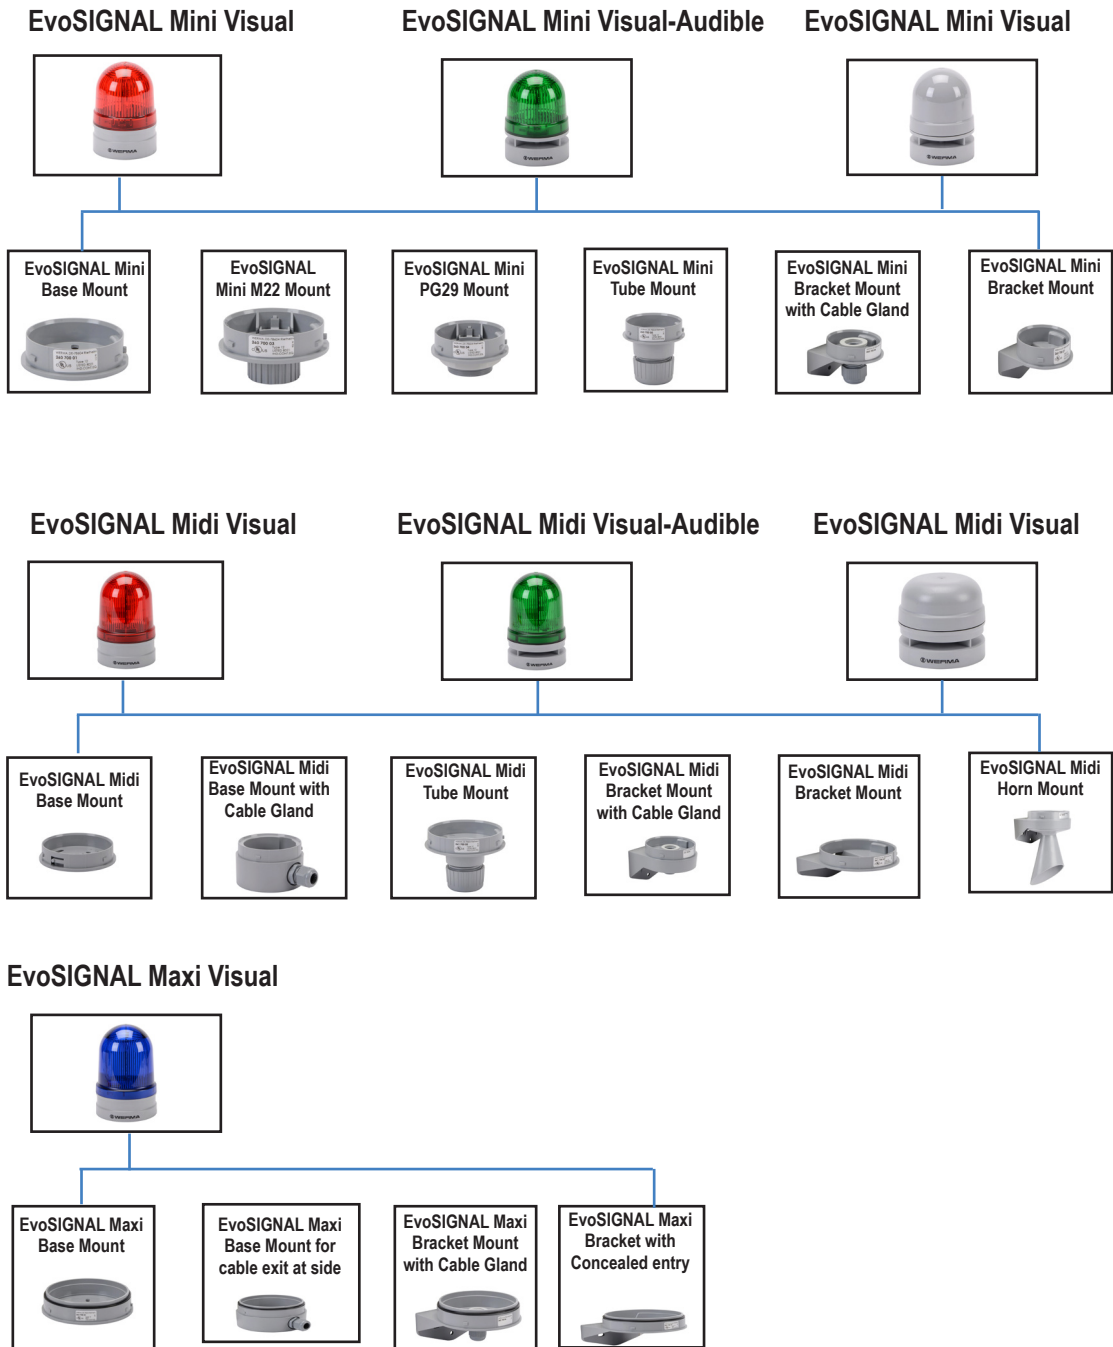

## Visual Mini 62mm Beacon EvoSIGNAL Series Overview

The EvoSIGNAL Mini Beacons are for locations that have limited space. They are available in TwinLIGHT and TwinFLASH lighting effects. Visual models available include Combi - Vertical and Audible, TriColor, and Audible Signal Horns.

### Features

- Voltage ratings 115-230 VAC, 12 VAC/VDC, 24VAC/VDC
- Available in Visual, Visual-Audible, and Audible styles
- TwinLIGHT light effects
- Push-in connection terminals
- 2 year warranty
- Base, tube, bracket and wall mount options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



**26011060**

**46021060**

### Visual Mini 62mm Beacon EvoSIGNAL Selection Chart

Part Number	Price	LED Color	Drawing Link	Description	Voltage	Current	Starting/Inrush	dB Rating	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<b>Mini TwinLIGHT Visual</b>													
<a href="#">26011060</a>	\$60.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 420ms)	115-230 VAC	40mA	2.5 A	-	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap ABS/ Polycarbonate blend, Gray base	71 [2.50]	Push-in Terminal 24-16 AWG
<a href="#">26021060</a>	\$60.00	Green	<a href="#">PDF</a>										
<a href="#">26031060</a>	\$60.00	Yellow	<a href="#">PDF</a>										
<a href="#">26041060</a>	\$60.00	Clear	<a href="#">PDF</a>										
<a href="#">26051060</a>	\$60.00	Blue	<a href="#">PDF</a>										
<a href="#">26011074</a>	\$60.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 410ms)	12 VAC/ VDC	86mA	1.0 A	-	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap ABS/ Polycarbonate blend, Gray base	71 [2.50]	
<a href="#">26021074</a>	\$60.00	Green	<a href="#">PDF</a>										
<a href="#">26031074</a>	\$60.00	Yellow	<a href="#">PDF</a>										
<a href="#">26041074</a>	\$60.00	Clear	<a href="#">PDF</a>										
<a href="#">26051074</a>	\$60.00	Blue	<a href="#">PDF</a>										
<a href="#">26011075</a>	\$54.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 470ms)	24 VAC/ VDC	72mA	1.6 A	-	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap ABS/ Polycarbonate blend, Gray base	71 [2.50]	
<a href="#">26021075</a>	\$54.00	Green	<a href="#">PDF</a>										
<a href="#">26031075</a>	\$54.00	Yellow	<a href="#">PDF</a>										
<a href="#">26041075</a>	\$54.00	Clear	<a href="#">PDF</a>										
<a href="#">26051075</a>	\$54.00	Blue	<a href="#">PDF</a>										
<b>Mini TwinLIGHT Combi Visual - Audible</b>													
<a href="#">46011060</a>	\$111.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 420ms)  2 Tone: Continuous/ Pulse	115-230 VAC	65mA	2.0 A	95dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap ABS/ Polycarbonate blend, Gray base	78 [0.75]	Push-in Terminal 24-16 AWG
<a href="#">46021060</a>	\$111.00	Green	<a href="#">PDF</a>										
<a href="#">46031060</a>	\$111.00	Yellow	<a href="#">PDF</a>										
<a href="#">46041060</a>	\$111.00	Clear	<a href="#">PDF</a>										
<a href="#">46051060</a>	\$111.00	Blue	<a href="#">PDF</a>										
<a href="#">46011074</a>	\$111.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 410ms)  2 Tone: Continuous/ Pulse	12 VAC/ VDC	98mA	2.0 A	95dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap ABS/ Polycarbonate blend, Gray base	78 [2.75]	
<a href="#">46021074</a>	\$111.00	Green	<a href="#">PDF</a>										
<a href="#">46031074</a>	\$111.00	Yellow	<a href="#">PDF</a>										
<a href="#">46041074</a>	\$111.00	Clear	<a href="#">PDF</a>										
<a href="#">46051074</a>	\$111.00	Blue	<a href="#">PDF</a>										
<a href="#">46011075</a>	\$96.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 470ms)  2 Tone: Continuous/ Pulse	24 VAC/ VDC	98mA	3.0 A	95dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap ABS/ Polycarbonate blend, Gray base	78 [2.75]	
<a href="#">46021075</a>	\$96.00	Green	<a href="#">PDF</a>										
<a href="#">46031075</a>	\$96.00	Yellow	<a href="#">PDF</a>										
<a href="#">46041075</a>	\$96.00	Clear	<a href="#">PDF</a>										
<a href="#">46051075</a>	\$96.00	Blue	<a href="#">PDF</a>										

Requires Mounting Adapter - sold separately





# Signal Devices

## Visual Mini TwinFLASH 62mm Beacon EvoSIGNAL Series

### Features

- Voltage ratings 115–230 VAC, 12 VAC/VDC, 24VAC/VDC
- Available in Visual, Visual-Audible, and Audible styles
- TwinFLASH light effects
- Push-in connection terminals
- 2 year warranty
- Base, tube, bracket and wall mount options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



**26012060**

**46022060**

Visual Mini TwinFLASH 62mm Beacon EvoSIGNAL Series Selection Chart													
Part Number	Price	LED Color	Drawing Link	Description	Voltage	Current	Starting/Inrush	dB Rating	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<b>Mini TwinFLASH Visual</b>													
<a href="#">26012060</a>	\$76.00	Red	<a href="#">PDF</a>	double flash (ON 30ms, Off 160ms, ON 30ms, Off 740ms, 1 Hz flash frequency) or EVS (Enhanced Visibility System) flashing (random flashing)	115–230 VAC	40mA	2.5 A	–	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	71 [2.50]	Push-in Terminal 24-16 AWG
<a href="#">26022060</a>	\$76.00	Green	<a href="#">PDF</a>								ABS/ Polycarbonate blend, Gray base		
<a href="#">26032060</a>	\$76.00	Yellow	<a href="#">PDF</a>										
<a href="#">26042060</a>	\$76.00	Clear	<a href="#">PDF</a>										
<a href="#">26052060</a>	\$76.00	Blue	<a href="#">PDF</a>										
<a href="#">26012074</a>	\$76.00	Red	<a href="#">PDF</a>		12 VAC/ VDC	70mA	1.0 A	–	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	71 [2.50]	
<a href="#">26022074</a>	\$76.00	Green	<a href="#">PDF</a>								ABS/ Polycarbonate blend, Gray base		
<a href="#">26032074</a>	\$76.00	Yellow	<a href="#">PDF</a>										
<a href="#">26042074</a>	\$76.00	Clear	<a href="#">PDF</a>										
<a href="#">26052074</a>	\$76.00	Blue	<a href="#">PDF</a>										
<a href="#">26012075</a>	\$67.00	Red	<a href="#">PDF</a>		24 VAC/ VDC	66mA	1.6 A	–	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	71 [2.50]	
<a href="#">26022075</a>	\$67.00	Green	<a href="#">PDF</a>								ABS/ Polycarbonate blend, Gray base		
<a href="#">26032075</a>	\$67.00	Yellow	<a href="#">PDF</a>										
<a href="#">26042075</a>	\$67.00	Clear	<a href="#">PDF</a>										
<a href="#">26052075</a>	\$67.00	Blue	<a href="#">PDF</a>										
<b>Mini TwinFLASH Combi Visual - Audible</b>													
<a href="#">46012060</a>	\$129.00	Red	<a href="#">PDF</a>	double flash (ON 30ms, Off 160ms, ON 30ms, Off 740ms, 1 Hz flash frequency) or EVS (Enhanced Visibility System) flashing (random flashing) 2 Tone: Continuous/ Pulse	115–230 VAC	60mA	2.0 A	95dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	78 [2.75]	Push-in Terminal 24-16 AWG
<a href="#">46022060</a>	\$129.00	Green	<a href="#">PDF</a>								ABS/ Polycarbonate blend, Gray base		
<a href="#">46032060</a>	\$129.00	Yellow	<a href="#">PDF</a>										
<a href="#">46042060</a>	\$129.00	Clear	<a href="#">PDF</a>										
<a href="#">46052060</a>	\$129.00	Blue	<a href="#">PDF</a>										
<a href="#">46012074</a>	\$129.00	Red	<a href="#">PDF</a>		12 VAC/ VDC	82mA	2.0 A	95dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	78 [2.75]	
<a href="#">46022074</a>	\$129.00	Green	<a href="#">PDF</a>								ABS/ Polycarbonate blend, Gray base		
<a href="#">46032074</a>	\$129.00	Yellow	<a href="#">PDF</a>										
<a href="#">46042074</a>	\$129.00	Clear	<a href="#">PDF</a>										
<a href="#">46052074</a>	\$129.00	Blue	<a href="#">PDF</a>										
<a href="#">46012075</a>	\$111.00	Red	<a href="#">PDF</a>		24 VAC/ VDC	98mA	3.0 A	95dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	78 [2.75]	
<a href="#">46022075</a>	\$111.00	Green	<a href="#">PDF</a>								ABS/ Polycarbonate blend, Gray base		
<a href="#">46032075</a>	\$111.00	Yellow	<a href="#">PDF</a>										
<a href="#">46042075</a>	\$111.00	Clear	<a href="#">PDF</a>										
<a href="#">46052075</a>	\$111.00	Blue	<a href="#">PDF</a>										

Requires Mounting Adapter - sold separately




**WERMA**  
 SIGNALTECHNIK

# Signal Devices

## Visual Mini Tricolor 62mm Beacon EvoSIGNAL Series

### Features

- Voltage rating 24VAC/VDC
- Push-in connection terminals
- 2 year warranty
- Base, tube, bracket and wall mount options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus file E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.


**26043075**

### Visual Mini Tricolor 62mm Beacon EvoSIGNAL Series Selection Chart

Part Number	Price	Drawing Link	LED Color	Description	Voltage	Current	Starting/Inrush	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<a href="#">26043075</a>	\$77.00	<a href="#">PDF</a>	Red / Yellow / Green	permanent	24 VAC/VDC	83mA	1.6 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap  ABS/ Polycarbonate blend, Gray base	71 [2.50]	Push-in Terminal 24-16 AWG

Requires Mounting Adapter - sold separately

## Visual Mini Audible Signal Horn 62mm EvoSIGNAL Series

### Features

- Voltage ratings 115-230 VAC, 12 VAC/VDC, 24VAC/VDC
- Push-in connection terminals
- 2 year warranty
- 2 Tone continuous or pulse
- Base, tube, bracket and wall mount options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus file E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.


**16070060**

### Visual Mini Audible Signal Horn 62mm EvoSIGNAL Series Selection Chart

Part Number	Price	Drawing Link	Description	Voltage	Current	Starting/Inrush	dB Rating	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<a href="#">16070060</a>	\$73.00	<a href="#">PDF</a>	2 Tone: 4kHz Continuous/pulse	115-230 VAC	30mA	3.0 A	95dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	5,000h minimum	Polycarbonate cap  ABS/ Polycarbonate blend, Gray base	78 [2.75]	Push-in Terminal 24-16 AWG
<a href="#">16070074</a>	\$73.00	<a href="#">PDF</a>	2 Tone: 4kHz Continuous/pulse	12 VAC/VDC	30mA	0.8 A						
<a href="#">16070075</a>	\$66.00	<a href="#">PDF</a>	2 Tone: 4kHz Continuous/pulse	24 VAC/VDC	40mA	1.6 A						

Requires Mounting Adapter - sold separately

# WERMA Signal Devices

## Visual And Audible-Visual Mini 62mm Beacon EvoSIGNAL Series Accessories

### Accessory Overview

The EvoSIGNAL Mini Beacons require a mounting adapter.

### Agency Approvals

- cULus E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Visual And Audible-Visual Mini 62mm Beacon EvoSIGNAL Series Accessories							
Part Number	Price	Drawing Link	Description	Operating Temp /Protection	Housing Material	Weight g [oz]	Agency Approvals
<a href="#">26070001</a>	\$5.75	<a href="#">PDF</a>	WERMA EvoSIGNAL Mini series mounting base adapter, base mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Mini industrial signal beacons, audible-visual signal beacons and audible signal horns.	-22 to 140°F [-30 to 60°C]  IP66 UL Type 12	PC/ABS	13 [0.45]	cULus file E164155, RoHS
<a href="#">26070003</a>	\$10.00	<a href="#">PDF</a>	WERMA EvoSIGNAL Mini series mounting adapter, panel mount, M22 x 1.5mm thread type, 62mm diameter, 33mm height, gray, ABS plastic. For use with WERMA EvoSIGNAL Mini industrial signal beacons, audible-visual signal beacons and audible signal horns.			29 [1.02]	
<a href="#">26070004</a>	\$10.00	<a href="#">PDF</a>	WERMA EvoSIGNAL Mini series PG 29 mounting adapter, panel mount, PG29 thread type, gray, ABS plastic. For use with WERMA EvoSIGNAL Mini industrial signal beacons, audible-visual signal beacons and audible signal horns.			32 [1.12]	
<a href="#">26070005</a>	\$12.50	<a href="#">PDF</a>	WERMA EvoSIGNAL Mini series tube adapter, tube mount, 1/2in NPT thread type, 62mm diameter, 60mm height, gray, ABS plastic. For use with WERMA EvoSIGNAL Mini industrial signal beacons, audible-visual signal beacons and audible signal horns.			13 [0.45]	RoHS
<a href="#">26070006</a>	\$6.75	<a href="#">PDF</a>	WERMA EvoSIGNAL Mini series mounting bracket adapter with cable gland, wall mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Mini industrial signal beacons, audible-visual signal beacons and audible signal horns.			39 [1.37]	
<a href="#">26070007</a>	\$6.75	<a href="#">PDF</a>	WERMA EvoSIGNAL Mini series mounting bracket adapter, wall mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Mini industrial signal beacons, audible-visual signal beacons and audible signal horns.			30 [1.05]	cULus file E164155, RoHS



[26070001](#)



[26070003](#)




[26070004](#)



[26070005](#)



[26070006](#)



[26070007](#)

# WERMA Signal Devices

SIGNALTECHNIK

## Visual Midi TwinLIGHT 85mm Beacon EvoSIGNAL Series

The EvoSIGNAL Midi Beacons are a flexible medium-range solution. They are available in TwinLIGHT, TwinFLASH and Rotating Lighting Effects. Visual, Combi - Visual-Audible, TriColor, and Audible Signal Horns.

### Features

- Voltage ratings 115–230 VAC, 12/24 VAC/VDC
- Available in Visual, Visual-Audible, and Audible styles
- TwinLIGHT light effects
- Push-in connection terminals
- 2 year warranty
- Base, tube, bracket and wall mount options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



**26111060**



**46121060**

## Visual Midi TwinLIGHT 85mm Beacon EvoSIGNAL Series Selection Chart

Part Number	Price	LED Color	Drawing Link	Description	Voltage	Current	Starting/Inrush	dB Rating	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<b>Midi TwinLIGHT Visual</b>													
<a href="#">26111060</a>	\$104.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 420ms)	115–230 VAC	65mA	7.0 A	-	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	181 [6.38]	Push-in Terminal 24-16 AWG
<a href="#">26121060</a>	\$104.00	Green	<a href="#">PDF</a>										
<a href="#">26131060</a>	\$104.00	Yellow	<a href="#">PDF</a>										
<a href="#">26141060</a>	\$104.00	Clear	<a href="#">PDF</a>										
<a href="#">26151060</a>	\$104.00	Blue	<a href="#">PDF</a>										
<a href="#">26111070</a>	\$97.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 480ms)	12/24 VAC/VDC	175mA	1.0 A	-	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	141 [4.97]	Push-in Terminal 24-16 AWG
<a href="#">26121070</a>	\$97.00	Green	<a href="#">PDF</a>										
<a href="#">26131070</a>	\$97.00	Yellow	<a href="#">PDF</a>										
<a href="#">26141070</a>	\$97.00	Clear	<a href="#">PDF</a>										
<a href="#">26151070</a>	\$97.00	Blue	<a href="#">PDF</a>										
<b>Midi TwinLIGHT Combi Visual- Audible</b>													
<a href="#">46111060</a>	\$172.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 420ms) (10) selectable	115–230 VAC	150mA	7.0 A	110dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	182 [6.41]	Push-in Terminal 24-16 AWG
<a href="#">46121060</a>	\$172.00	Green	<a href="#">PDF</a>										
<a href="#">46131060</a>	\$172.00	Yellow	<a href="#">PDF</a>										
<a href="#">46141060</a>	\$172.00	Clear	<a href="#">PDF</a>										
<a href="#">46151060</a>	\$172.00	Blue	<a href="#">PDF</a>										
<a href="#">46111070</a>	\$158.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 480ms) (10) selectable	12/24 VAC/VDC	290mA	2.5 A	110dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	180 [6.34]	Push-in Terminal 24-16 AWG
<a href="#">46121070</a>	\$158.00	Green	<a href="#">PDF</a>										
<a href="#">46131070</a>	\$158.00	Yellow	<a href="#">PDF</a>										
<a href="#">46141070</a>	\$158.00	Clear	<a href="#">PDF</a>										
<a href="#">46151070</a>	\$158.00	Blue	<a href="#">PDF</a>										

Requires Mounting Adapter - sold separately

# WERMA Signal Devices

## Visual Midi TwinFLASH 85mm Beacon EvoSIGNAL Series

### Features

- Voltage ratings 115-230 VAC, 12/24 VAC/VDC
- Available in Visual, Visual-Audible, and Audible styles
- TwinFLASH light effects
- Push-in connection terminals
- 2 year warranty
- Base, tube, bracket and wall mount options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



**26112060**



**46122060**

Visual Midi TwinFLASH 85mm Beacon EvoSIGNAL Series Selection Chart													
Part Number	Price	LED Color	Drawing Link	Description	Voltage	Current	Starting/Inrush	dB Rating	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<b>Midi TwinFLASH Visual</b>													
<a href="#">26112060</a>	\$116.00	Red	<a href="#">PDF</a>	double flash (ON 30ms, Off 160ms, ON 30ms, Off 740ms, 1 Hz flash frequency) or EVS (Enhanced Visibility System) flashing (random flashing)	115-230 VAC	100mA	5.5 A	-	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	159 [5.60]	Push-in Terminal 24-16 AWG
<a href="#">26122060</a>	\$116.00	Green	<a href="#">PDF</a>								ABS/Polycarbonate blend, Gray base	186 [6.56]	
<a href="#">26132060</a>	\$116.00	Yellow	<a href="#">PDF</a>								Polycarbonate cap	148 [5.22]	
<a href="#">26142060</a>	\$116.00	Clear	<a href="#">PDF</a>										
<a href="#">26152060</a>	\$116.00	Blue	<a href="#">PDF</a>	double flash (ON 30ms, Off 160ms, ON 30ms, Off 740ms, 1 Hz flash frequency) or EVS (Enhanced Visibility System) flashing (random flashing)	12/24 VAC/VDC	150mA	1.0 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	186 [6.56]		
<a href="#">26112070</a>	\$109.00	Red	<a href="#">PDF</a>							ABS/Polycarbonate blend, Gray base	186 [6.56]		
<a href="#">26122070</a>	\$109.00	Green	<a href="#">PDF</a>										
<a href="#">26132070</a>	\$109.00	Yellow	<a href="#">PDF</a>										
<a href="#">26142070</a>	\$109.00	Clear	<a href="#">PDF</a>	<b>Midi TwinFLASH Combi Visual - Audible</b>	115-230 VAC	290mA	7.0 A	110dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	195 [6.87]	Push-in Terminal 24-16 AWG
<a href="#">46112060</a>	\$186.00	Red	<a href="#">PDF</a>								ABS/Polycarbonate blend, Gray base	186 [6.56]	
<a href="#">46122060</a>	\$186.00	Green	<a href="#">PDF</a>										
<a href="#">46132060</a>	\$186.00	Yellow	<a href="#">PDF</a>								Polycarbonate cap	148 [5.22]	
<a href="#">46142060</a>	\$186.00	Clear	<a href="#">PDF</a>										
<a href="#">46152060</a>	\$186.00	Blue	<a href="#">PDF</a>	double flash (ON 30ms, Off 160ms, ON 30ms, Off 740ms, 1 Hz flash frequency) or EVS (Enhanced Visibility System) flashing (random flashing) (10) selectable	12/24 VAC/VDC	205mA	2.5 A	110dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	186 [6.56]	
<a href="#">46112070</a>	\$168.00	Red	<a href="#">PDF</a>								ABS/Polycarbonate blend, Gray base	186 [6.56]	
<a href="#">46122070</a>	\$168.00	Green	<a href="#">PDF</a>										
<a href="#">46132070</a>	\$168.00	Yellow	<a href="#">PDF</a>										
<a href="#">46142070</a>	\$168.00	Clear	<a href="#">PDF</a>	Polycarbonate cap	148 [5.22]								
<a href="#">46152070</a>	\$168.00	Blue	<a href="#">PDF</a>										

Requires Mounting Adapter - sold separately



# Signal Devices

## Visual Midi Tricolor 85mm Beacon EvoSIGNAL Series

### Features

- Voltage ratings 115–230 VAC, 12/24 VAC/VDC
- Push-in connection terminals
- 2 year warranty
- Base, tube, bracket and wall mount options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



**26143060**

Visual Midi Tricolor 85mm Beacon EvoSIGNAL Series Selection Chart												
Part Number	Price	LED Color	Drawing Link	Description	Voltage	Current	Starting/Inrush	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<a href="#">26143060</a>	\$152.00	Red / Yellow / Green	<a href="#">PDF</a>	Permanent	115–230 VAC	50mA	7.0 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	157 [5.53]	Push-in Terminal 24-16 AWG
<a href="#">26143070</a>	\$145.00	Red / Yellow / Green	<a href="#">PDF</a>	Permanent	12/24 VAC/VDC	135mA	1.0 A			ABS/ Polycarbonate blend, Gray base	143 [5.04]	

Requires Mounting Adapter - sold separately

## Visual Midi Rotating 85mm Beacon EvoSIGNAL Series

### Features

- Voltage ratings 115–230 VAC, 12/24 VAC/VDC
- Push-in connection terminals
- 2 year warranty
- Base, tube, bracket and wall mount options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



**26114060**

Visual Midi Rotating 85mm Beacon EvoSIGNAL Series Selection Chart												
Part Number	Price	LED Color	Drawing Link	Description	Voltage	Current	Starting/Inrush	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<a href="#">26114060</a>	\$146.00	Red	<a href="#">PDF</a>	Rotating (180 rpm)	115–230 VAC	100mA	7.0 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	180 [6.34]	Push-in Terminal 24-16 AWG
<a href="#">26124060</a>	\$146.00	Green	<a href="#">PDF</a>							ABS/ Polycarbonate blend, Gray base	226 [7.97]	
<a href="#">26134060</a>	\$146.00	Yellow	<a href="#">PDF</a>									
<a href="#">26144060</a>	\$146.00	Clear	<a href="#">PDF</a>									
<a href="#">26154060</a>	\$146.00	Blue	<a href="#">PDF</a>									
<a href="#">26114070</a>	\$139.00	Red	<a href="#">PDF</a>	Rotating (180 rpm)	12/24 VAC/VDC	120mA	1.0 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	170 [5.99]	
<a href="#">26124070</a>	\$139.00	Green	<a href="#">PDF</a>							ABS/ Polycarbonate blend, Gray base	226 [7.97]	
<a href="#">26134070</a>	\$139.00	Yellow	<a href="#">PDF</a>									
<a href="#">26144070</a>	\$139.00	Clear	<a href="#">PDF</a>									
<a href="#">26154070</a>	\$139.00	Blue	<a href="#">PDF</a>									

Requires Mounting Adapter - sold separately



# WERMA Signal Devices

## Visual Midi Audible Signal Horn 85mm EvoSIGNAL Series

### Features

- Voltage ratings 115–230 VAC, 12/24 VAC/VDC
- Push-in connection terminals
- 2 year warranty
- 10 selectable tones
- Base, tube, bracket and horn mounting options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus file E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



**16170070**

Visual Midi Audible Signal Horn 85mm EvoSIGNAL Series Selection Chart												
Part Number	Price	Drawing Link	Description	Voltage	Current	Starting/Inrush	dB Rating	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<a href="#">16170060</a>	\$93.00	<a href="#">PDF</a>	(10) selectable 3.3 KHZ	115–230 VAC	105mA	7.0 A	110dB at 1m	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	5,000h minimum	Polycarbonate cap	137 [4.83]	Push-in Terminal 24-16 AWG
<a href="#">16170070</a>	\$86.00	<a href="#">PDF</a>	(10) selectable 3.3 KHZ	12/24 VAC/VDC	83mA	2.5 A				ABS/ Polycarbonate blend, Gray base	178 [6.27]	

Requires Mounting Adapter - sold separately

## Midi 85mm Beacon EvoSIGNAL Series Accessories

### Accessory Overview

The EvoSIGNAL Midi Beacons require a mounting adapter.

### Agency Approvals

- cULus E164155
- CE



Midi 85mm Beacon EvoSIGNAL Series Accessories									
Part Number	Price	Drawing Link	Description	Operating Temp /Protection	Housing Material	Weight g [oz]	Cable Entry	Agency Approvals	
<a href="#">26170001</a>	\$6.75	<a href="#">PDF</a>	WERMA EvoSIGNAL Midi series mounting base adapter, base mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Midi industrial signal beacons, audible-visual signal beacons and audible signal horns.	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	PC/ABS	40 [1.41]	Through Hole	cULus file E164155, RoHS	
<a href="#">26170002</a>	\$13.50	<a href="#">PDF</a>	WERMA EvoSIGNAL Midi series mounting base adapter with cable gland, base mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Midi industrial signal beacons, audible-visual signal beacons and audible signal horns.			100 [3.52]	Screwed Cable Gland	RoHS	
<a href="#">26170003</a>	\$12.50	<a href="#">PDF</a>	WERMA EvoSIGNAL Midi series mounting bracket adapter with horn, wall mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Midi industrial signal beacons, audible-visual signal beacons and audible signal horns.			136 [4.79]	Membrane Grommet	RoHS	
<a href="#">26170005</a>	\$14.50	<a href="#">PDF</a>	WERMA EvoSIGNAL Midi series tube adapter, tube mount, 1/2in NPT thread type, 85mm diameter, 64mm height, gray, ABS plastic. For use with WERMA EvoSIGNAL Midi industrial signal beacons, audible-visual signal beacons and audible signal horns.			59 [2.08]	Through Hole	cULus file E164155, RoHS	
<a href="#">26170006</a>	\$11.50	<a href="#">PDF</a>	WERMA EvoSIGNAL Midi series mounting bracket adapter with cable gland, wall mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Midi industrial signal beacons, audible-visual signal beacons and audible signal horns.			87 [3.06]	Screwed Cable Gland	RoHS	
<a href="#">26170007</a>	\$7.75	<a href="#">PDF</a>	WERMA EvoSIGNAL Midi series mounting bracket adapter, wall mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Midi industrial signal beacons, audible-visual signal beacons and audible signal horns.			54 [1.90]	Through Hole	cULus file E164155, RoHS	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

## Visual Maxi TwinLIGHT And TwinFLASH 120mm Beacon EvoSIGNAL Series

### Maxi 120mm Beacon Overview

The EvoSIGNAL Maxi Beacons are a flexible long-range solution. The Maxi series are generally used for building services engineering, door and gate applications, machinery and plant equipment systems. They are available in TwinLIGHT, TwinFLASH and Rotating lighting effects.

### Features

- Voltage ratings 115–230 VAC, 12/24 VAC/VDC
- Available in Visual and Rotating styles
- TwinLIGHT and TwinFLASH light effects
- Push-in connection terminals
- 2 year warranty
- Base, tube, bracket and wall mount options
- Requires mounting adapter - sold separately
- IP66

### Agency Approvals

- cULus E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



**26211060**

**26252070**

### Visual Maxi 120mm Beacon EvoSIGNAL Series Selection Chart

Part Number	Price	LED Color	Drawing Link	Description	Voltage	Current	Starting/Inrush	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<b>Maxi TwinLIGHT Visual</b>												
<a href="#">26211060</a>	\$256.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 480ms)	115–230 VAC	165mA	< 6.0 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	350 [12.34]	Push-in Terminal 24-16 AWG
<a href="#">26221060</a>	\$256.00	Green	<a href="#">PDF</a>							ABS/Polycarbonate blend, Gray base	505 [17.81]	
<a href="#">26231060</a>	\$256.00	Yellow	<a href="#">PDF</a>									
<a href="#">26241060</a>	\$256.00	Clear	<a href="#">PDF</a>									
<a href="#">26251060</a>	\$256.00	Blue	<a href="#">PDF</a>									
<a href="#">26211070</a>	\$248.00	Red	<a href="#">PDF</a>	permanent or blinking (1 Hz ON for 480ms)	12/24 VAC/VDC	700mA	< 1.8 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	346 [12.20]	Push-in Terminal 24-16 AWG
<a href="#">26221070</a>	\$248.00	Green	<a href="#">PDF</a>							ABS/Polycarbonate blend, Gray base	348 [12.27]	
<a href="#">26231070</a>	\$248.00	Yellow	<a href="#">PDF</a>									
<a href="#">26241070</a>	\$248.00	Clear	<a href="#">PDF</a>									
<a href="#">26251070</a>	\$248.00	Blue	<a href="#">PDF</a>									
<b>Maxi TwinFLASH Visual</b>												
<a href="#">26212060</a>	\$271.00	Red	<a href="#">PDF</a>	double flash (ON 50ms, Off 100ms, ON 50ms, Off 820ms, 1 Hz flash frequency) or EVS (Enhanced Visibility System) flashing (random flashing)	115–230 VAC	165mA	< 6.0 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	350 [12.34]	Push-in Terminal 24-16 AWG
<a href="#">26222060</a>	\$271.00	Green	<a href="#">PDF</a>							ABS/Polycarbonate blend, Gray base	505 [17.81]	
<a href="#">26232060</a>	\$271.00	Yellow	<a href="#">PDF</a>									
<a href="#">26242060</a>	\$271.00	Clear	<a href="#">PDF</a>									
<a href="#">26252060</a>	\$271.00	Blue	<a href="#">PDF</a>									
<a href="#">26212070</a>	\$262.00	Red	<a href="#">PDF</a>	double flash (ON 50ms, Off 100ms, ON 50ms, Off 820ms, 1 Hz flash frequency) or EVS (Enhanced Visibility System) flashing (random flashing)	12/24 VAC/VDC	760mA	< 1.7 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	348 [12.27]	Push-in Terminal 24-16 AWG
<a href="#">26222070</a>	\$262.00	Green	<a href="#">PDF</a>							ABS/Polycarbonate blend, Gray base		
<a href="#">26232070</a>	\$262.00	Yellow	<a href="#">PDF</a>									
<a href="#">26242070</a>	\$262.00	Clear	<a href="#">PDF</a>									
<a href="#">26252070</a>	\$262.00	Blue	<a href="#">PDF</a>									

Requires Mounting Adapter - sold separately



# Signal Devices

## Visual Rotating Maxi 120mm Beacon EvoSIGNAL Series

### Features

- Voltage ratings 115–230 VAC, 12/24 VAC/VDC
- Push-in connection terminals
- Available in Rotating light effects
- 2 year warranty
- Base, bracket and wall mount options
- Require mounting bracket - sold separately
- IP66

### Agency Approvals

- cULus E164155
- CE

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



**26214060**



**26224070**

Visual Rotating Maxi 120mm Beacon EvoSIGNAL Series Selection Chart												
Part Number	Price	LED Color	Drawing Link	Description	Voltage	Current	Starting/Inrush	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection
<a href="#">26214060</a>	\$288.00	Red	<a href="#">PDF</a>	rotating (180 rpm)	115–230 VAC	170mA	< 6.0 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	398 [14.03]	Push-in Terminal 24-16 AWG
<a href="#">26224060</a>	\$288.00	Green	<a href="#">PDF</a>							ABS/Polycarbonate blend, Gray base	408 [14.39]	
<a href="#">26234060</a>	\$288.00	Yellow	<a href="#">PDF</a>									
<a href="#">26244060</a>	\$288.00	Clear	<a href="#">PDF</a>									
<a href="#">26254060</a>	\$288.00	Blue	<a href="#">PDF</a>									
<a href="#">26214070</a>	\$282.00	Red	<a href="#">PDF</a>	rotating (180 rpm)	12/24 VAC/VDC	550mA	< 1.8 A	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	50,000h minimum	Polycarbonate cap	394 [13.89]	
<a href="#">26224070</a>	\$282.00	Green	<a href="#">PDF</a>							ABS/Polycarbonate blend, Gray base	408 [14.39]	
<a href="#">26234070</a>	\$282.00	Yellow	<a href="#">PDF</a>									
<a href="#">26244070</a>	\$282.00	Clear	<a href="#">PDF</a>									
<a href="#">26254070</a>	\$282.00	Blue	<a href="#">PDF</a>									

Requires Mounting Adapter - sold separately




**WERMA** Signal Devices  
 SIGNALTECHNIK

## Maxi 120mm Beacon EvoSIGNAL Series Accessories

### Accessory Overview

The EvoSIGNAL Maxi Beacons require a mounting adapter.

### Agency Approvals

- cULus E164155
- CE



[26270001](#)



[26270002](#)



[26270006](#)



[26270007](#)

### Maxi 120mm Beacon EvoSIGNAL Series Accessories

Part Number	Price	Drawing Link	Description	Operating Temp /Protection	Housing Material	Weight g [Oz]	Cable Entry	Agency Approvals
<a href="#"><u>26270001</u></a>	\$11.50	<a href="#"><u>PDF</u></a>	WERMA EvoSIGNAL Maxi series mounting base adapter, base mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Maxi industrial signal beacons.	-22 to 140°F [-30 to 60°C] IP66 UL Type 12	PC/ABS	96 [3.38]	Through Hole	cULus file E164155, RoHS
<a href="#"><u>26270002</u></a>	\$16.50	<a href="#"><u>PDF</u></a>	WERMA EvoSIGNAL Maxi series mounting base adapter with cable gland, base mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Maxi industrial signal beacons.			185 [6.52]	Screwed Cable Gland	RoHS
<a href="#"><u>26270006</u></a>	\$15.50	<a href="#"><u>PDF</u></a>	WERMA EvoSIGNAL Maxi series mounting bracket adapter with cable gland, wall mount, gray, ABS plastic. For use with WERMA EvoSIGNAL Maxi industrial signal beacons.			122 [4.30]	Screwed Cable Gland	RoHS
<a href="#"><u>26270007</u></a>	\$14.50	<a href="#"><u>PDF</u></a>	WERMA EvoSIGNAL Maxi series mounting bracket adapter, gray, ABS plastic. For use with WERMA EvoSIGNAL Maxi industrial signal beacons.			127 [4.47]	Through Hole	cULus file E164155, RoHS

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



# WERMA Signaling Overview

## Description

WERMA offers a wide range of signaling devices for either installation panel or surface mount applications. Modern designs and the latest LED technology provide exceptionally clear and bright signalling.

## Installation Beacon Connections and Audible Signal Devices

WERMA installation beacons are designed for mounting in panels or enclosures. A characteristic of this beacon type is that the rear fixture uses a central nut.

- Permanent, blinking, flashing, or LED beacons
- High protection rating IP65
- Beacons in 29, 57/58, and 75mm beacon diameters
- Audible modules with sight/sound combinations
- Signal modules come in common voltages (24V AC/DC, 115VAC, and 230VAC)
- Five colors
- For installation in 22.5 or 34mm cutouts

## Freestanding Beacons

WERMA freestanding beacons offer a range of modules including: permanent, blinking, flashing, LED EVS, and LED rotating.

- Base, bracket or tube mounting
- Incandescent, LED, or Xenon light sources
- High protection rating IP65
- 57/58/75/98mm beacon diameters available
- Tall lens option available
- Signal modules in common voltages (24V AC/DC, 115VAC, and 230VAC)
- Five colors available

## Beacon Accessories

Accessories for installation and freestanding beacons:

- Tube adapter, mounting base, surface-mounting enclosures, washers, for installation beacons
- Wire guard, bracket, wall-mount bracket, base and tube, and cable gland for freestanding beacons





# How to Select your WERMA Signal Device

## STEP 1

Select the required panel or freestanding beacon or buzzer for your application

## STEP 2

Select the required beacon height/depth for your application from either the panel beacons and buzzers or free-standing beacons.




### Visual Signal Elements

- Incandescent Permanent Light
- LED Permanent Light
- Xenon Flashing Light
- LED Flashing Light
- LED Blinking Light
- LED Rotating Light
- LED Double Flashing Light
- LED EVS (Enhanced Visibility System) Flashing Light


### Audible Signal Elements

- Buzzer Element
- Buzzer Element with Acknowledgment Function
- Bracket mounting continuous tone horns

### Installation Beacons and Buzzers

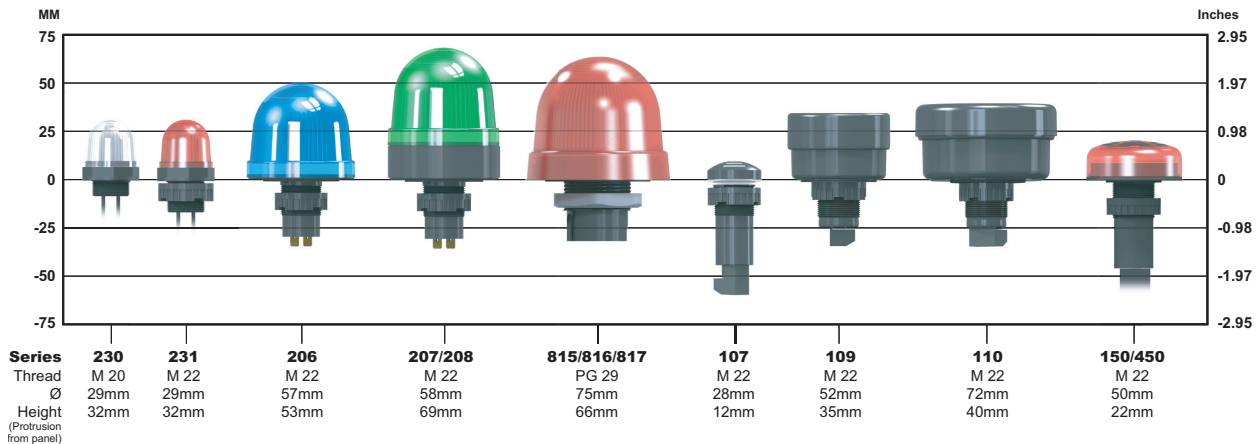

### Freestanding Beacons

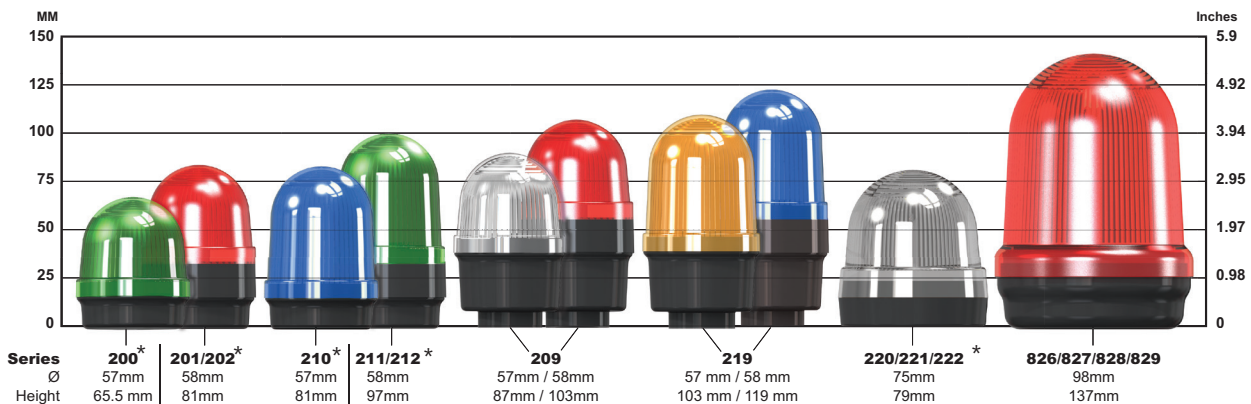


\*Bracket mount also available



# How to Select your WERMA Signal Device


## STEP 3

Select the correct mount for your application

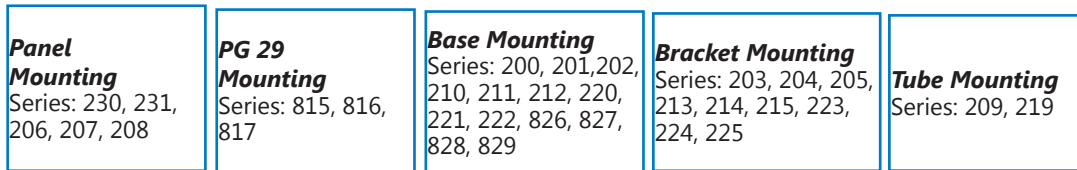

## STEP 4

Where appropriate, select a mounting accessory for your PG29, base-mounted, or tube-mounted beacon.

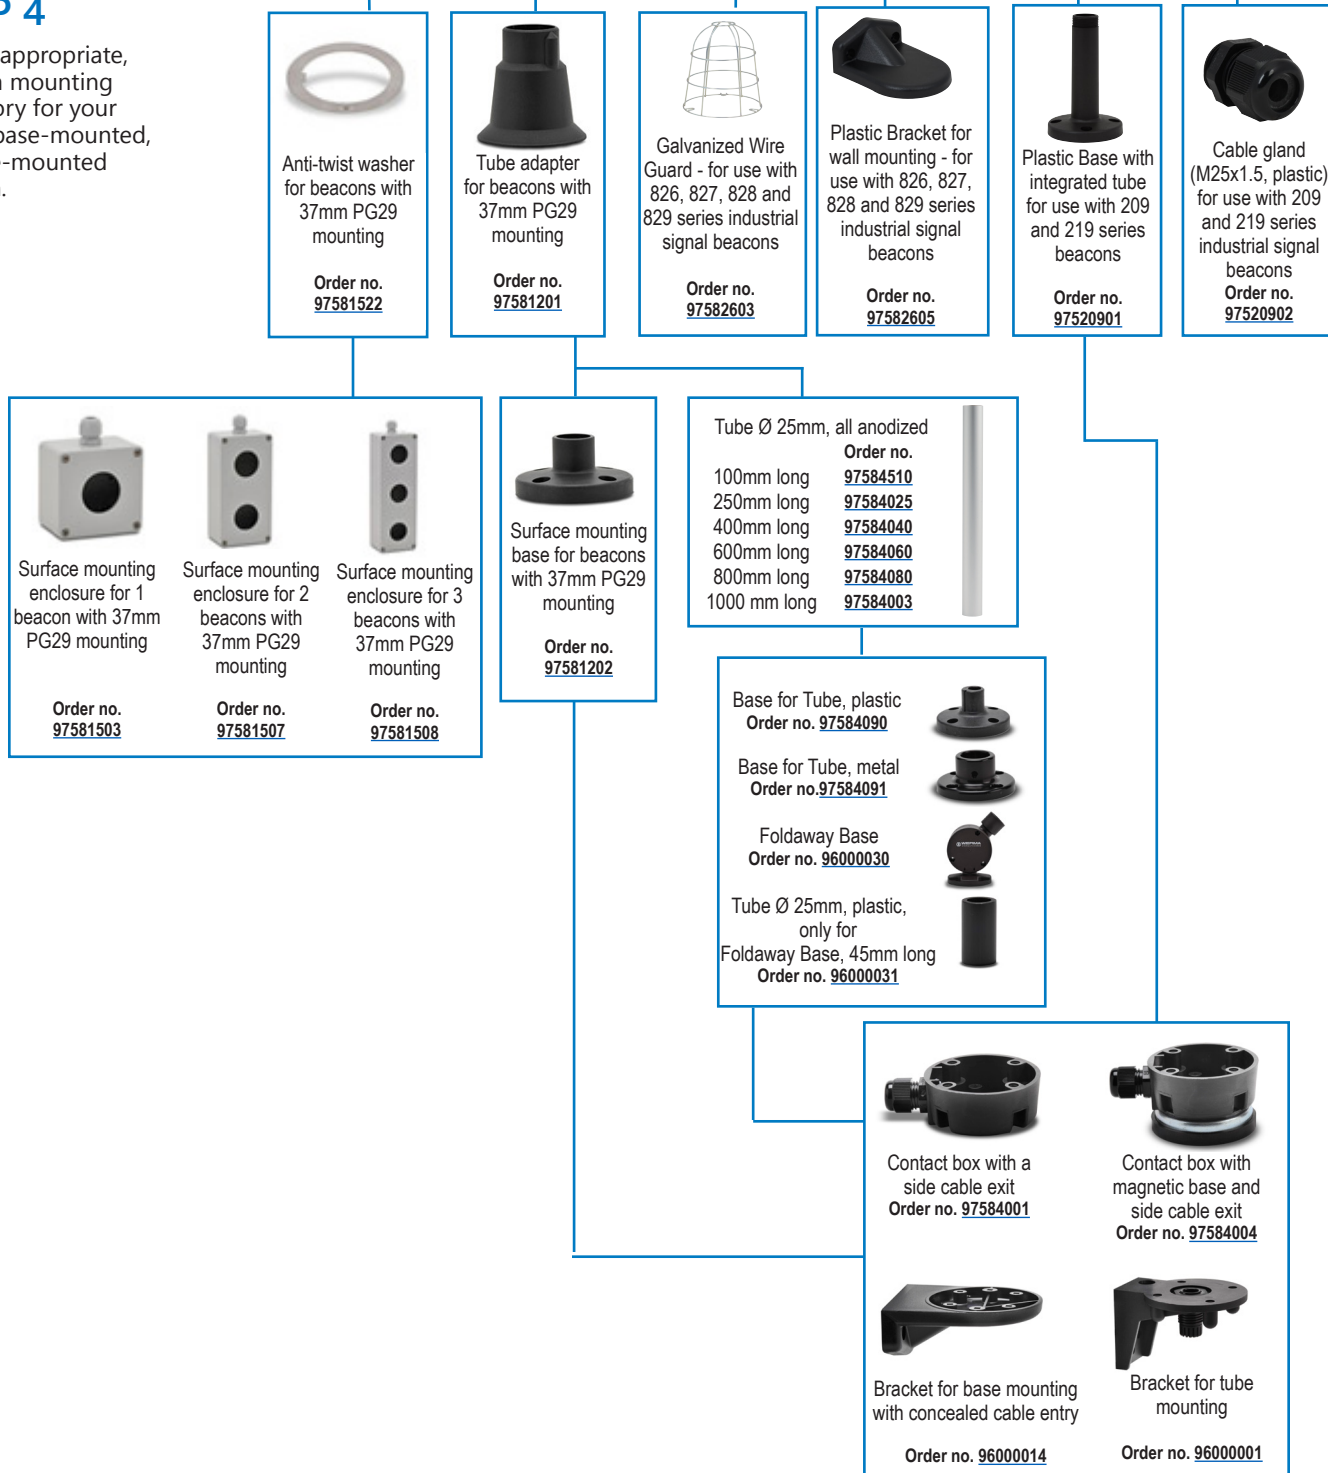

# WERMA Signal Devices

## Visual 29mm Beacons With Permanent LED Indicator

### Features

- High-intensity LED permanent beacon
- Mounting for either 22.5 mm panel mount or M20 thread for use with limit and cable-operated switches
- Lock nut included with 22.5 mm models
- Mostly sideways illumination
- Rubber seal included
- 2-year warranty



### Visual 29mm Beacons With Permanent LED Indicator Selection Chart

Part Number	Price	LED Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g[oz]	Connection	Agency Approvals
<b>230 Series 20mm x 1.5 Threaded Base</b>													
<a href="#">23010055</a>	\$66.00	Red	<a href="#">PDF</a>	LED Permanent Light	24VDC	< 45mA	≤ 0.5 A	-4 to 122°F [-20 to 50°C] IP65	up to 100,000h	Polycarbonate cap ABS/Polycarbonate blend, Black base	12 [0.42]	M20 x 1.5 Threaded base Does not include lock nut 2 wires, approximately 115mm long 20AWG (0.5 mm <sup>2</sup> )	cULus file E164155, CE, RoHS
<a href="#">23020055</a>	\$110.00	Green	<a href="#">PDF</a>										
<a href="#">23030055</a>	\$66.00	Yellow	<a href="#">PDF</a>										
<a href="#">23040055</a>	\$93.00	Clear	<a href="#">PDF</a>										
<a href="#">23050055</a>	\$89.00	Blue	<a href="#">PDF</a>										
<a href="#">23010067</a>	\$81.00	Red	<a href="#">PDF</a>		115VAC	< 15mA	-	IP65	up to 100,000h	Polycarbonate cap ABS/Polycarbonate blend, Black base	16 [0.56]	2 wires, approximately 105mm long 20AWG (0.5 mm <sup>2</sup> )	cULus file E164155, CE, RoHS
<a href="#">23020067</a>	\$127.00	Green	<a href="#">PDF</a>										
<a href="#">23030067</a>	\$81.00	Yellow	<a href="#">PDF</a>										
<a href="#">23040067</a>	\$127.00	Clear	<a href="#">PDF</a>										
<a href="#">23050067</a>	\$127.00	Blue	<a href="#">PDF</a>										
<b>231 Series 22.5 mm Panel Mount</b>													
<a href="#">23110055</a>	\$65.00	Red	<a href="#">PDF</a>	LED Permanent Light	24VDC	< 45mA	≤ 0.5 A	-4 to 122°F [-20 to 50°C] IP65	up to 100,000h	Polycarbonate cap ABS/Polycarbonate blend, Black base	16 [0.56]	M22 x 1.5 22.5 mm Panel mount 2 wires, approximately 105mm long 20AWG (0.5 mm <sup>2</sup> )	cULus file E164155, CE, RoHS
<a href="#">23120055</a>	\$107.00	Green	<a href="#">PDF</a>										
<a href="#">23130055</a>	\$65.00	Yellow	<a href="#">PDF</a>										
<a href="#">23140055</a>	\$105.00	Clear	<a href="#">PDF</a>										
<a href="#">23150055</a>	\$89.00	Blue	<a href="#">PDF</a>										
<a href="#">23110067</a>	\$79.00	Red	<a href="#">PDF</a>		115VAC	< 15mA	-	IP65	up to 100,000h	Polycarbonate cap ABS/Polycarbonate blend, Black base	16 [0.56]	2 wires, approximately 105mm long 20AWG (0.5 mm <sup>2</sup> )	cULus file E164155, CE, RoHS
<a href="#">23120067</a>	\$124.00	Green	<a href="#">PDF</a>										
<a href="#">23130067</a>	\$79.00	Yellow	<a href="#">PDF</a>										
<a href="#">23140067</a>	\$101.00	Clear	<a href="#">PDF</a>										
<a href="#">23150067</a>	\$101.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.





# Signal Devices

## Visual 57/58mm Panel Mount Beacons

### Features

- Available in permanent Incandescent or LED, and Xenon flashing models
- 360° visibility
- For use in 22.5 mm standard control panel holes
- Connection by 6.3mm x 0.8mm spades
- Finger-proof when used with insulated spades
- Changeable bulb for incandescent models not included
- Lock nut and rubber seal included
- 2-year warranty



### Visual 57/58 mm Beacons 206, 207, 208 Series Selection Chart

Part Number	Price	Lamp Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>22.5 mm Panel Mount</b>													
<a href="#">20610000</a>	\$33.00	Red	<a href="#">PDF</a>	Incandescent Permanent Light	max. 48V	Depends on bulb selection. (bulb sold separately)	-	-4 to 122°F [-20 to 50°C] IP65	Depends on bulb selection. (bulb sold separately)	Polycarbonate cap	39 [1.38]	22.5 mm Panel Mount	cULus file E164155, RoHS
<a href="#">20620000</a>	\$33.00	Green	<a href="#">PDF</a>										
<a href="#">20630000</a>	\$33.00	Yellow	<a href="#">PDF</a>										
<a href="#">20640000</a>	\$40.50	Clear	<a href="#">PDF</a>										
<a href="#">20650000</a>	\$40.50	Blue	<a href="#">PDF</a>										
<a href="#">20710075</a>	\$76.00	Red	<a href="#">PDF</a>	LED Permanent Light	24V AC/DC	< 45mA	≤ 0.5 A	-4 to 122°F [-20 to 50°C] IP65	up to 100,000h	Polycarbonate cap	56 [1.98]	22.5 mm Panel Mount	cULus file E164155, CE, RoHS
<a href="#">20720075</a>	\$76.00	Green	<a href="#">PDF</a>										
<a href="#">20730075</a>	\$76.00	Yellow	<a href="#">PDF</a>										
<a href="#">20740075</a>	\$119.00	Clear	<a href="#">PDF</a>										
<a href="#">20750075</a>	\$119.00	Blue	<a href="#">PDF</a>										
<a href="#">20710067</a>	\$87.00	Red	<a href="#">PDF</a>		115VAC	< 25mA	-	-4 to 122°F [-20 to 50°C] IP65	up to 100,000h	Polycarbonate cap			
<a href="#">20720067</a>	\$82.00	Green	<a href="#">PDF</a>										
<a href="#">20730067</a>	\$82.00	Yellow	<a href="#">PDF</a>										
<a href="#">20740067</a>	\$129.00	Clear	<a href="#">PDF</a>										
<a href="#">20750067</a>	\$129.00	Blue	<a href="#">PDF</a>										
<a href="#">20810055</a>	\$113.00	Red	<a href="#">PDF</a>							Xenon Flashing Light (0.75 Hz flash frequency)		24VDC	
<a href="#">20820055</a>	\$115.00	Green	<a href="#">PDF</a>										
<a href="#">20830055</a>	\$113.00	Yellow	<a href="#">PDF</a>										
<a href="#">20840055</a>	\$115.00	Clear	<a href="#">PDF</a>										
<a href="#">20850055</a>	\$115.00	Blue	<a href="#">PDF</a>										
<a href="#">20810067</a>	\$113.00	Red	<a href="#">PDF</a>	115VAC	< 25mA	-	-4 to 122°F [-20 to 50°C] IP65	4 x 106 flashes	Polycarbonate cap				
<a href="#">20820067</a>	\$115.00	Green	<a href="#">PDF</a>										
<a href="#">20830067</a>	\$113.00	Yellow	<a href="#">PDF</a>										
<a href="#">20840067</a>	\$110.00	Clear	<a href="#">PDF</a>										
<a href="#">20850067</a>	\$115.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



### Bulbs for Incandescent Permanent Visual Element

Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95584035</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	5W	24VDC	up to 5,000h



# Signal Devices

## Visual 75mm Beacons (PG29 Mount)

### Features

- Choose from blinking, rotating or permanent LED models, flashing Xenon model, or permanent Incandescent model
- Light-intensive Xenon flash in flash models
- High-impact polycarbonate lens (up to 20 joules)
- Various mounting accessories available
- Bulb not included with incandescent models
- Tamper-proof bulb change via rear access with bayonet mechanism on incandescent bulbs only
- 2-year warranty



### Visual 75mm Beacons 815, 816 and 817 Series Selection Chart

Part Number	Price	Color	Drawing Links	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g[oz]	Connection	Agency Approvals
<b>37mm (PG29 Mount)</b>													
<a href="#">81510000</a>	\$44.00	Red	<a href="#">PDF</a>	Incandescent Permanent Light	12-240V Depends on bulb selection. (bulb sold separately)	Depends on bulb selection. (bulb sold separately)	-	-4 to 140°F [-20 to 60°C]  IP65	Up to 5,000h	Polycarbonate cap  ABS/ Polycarbonate base	96 [3.39]	37mm (PG29) mount  Terminal M3 ≤ 2.5 mm² AWG14	cULus file E164155, CE, RoHS
<a href="#">81520000</a>	\$44.00	Green	<a href="#">PDF</a>										
<a href="#">81530000</a>	\$44.00	Yellow	<a href="#">PDF</a>										
<a href="#">81540000</a>	\$51.00	Clear	<a href="#">PDF</a>										
<a href="#">81550000</a>	\$51.00	Blue	<a href="#">PDF</a>										
<a href="#">81610055</a>	\$93.00	Red	<a href="#">PDF</a>	LED Permanent Light	24V AC/DC	< 45mA	≤ 0.5 A	-	up to 100,000h	107 [3.77]	37mm (PG29) mount  Terminal M3 ≤ 2.5 mm² AWG14	cULus file E164155, CE, RoHS	
<a href="#">81620055</a>	\$93.00	Green	<a href="#">PDF</a>										
<a href="#">81630055</a>	\$93.00	Yellow	<a href="#">PDF</a>										
<a href="#">81640055</a>	\$157.00	Clear	<a href="#">PDF</a>										
<a href="#">81650055</a>	\$157.00	Blue	<a href="#">PDF</a>										
<a href="#">81610067</a>	\$109.00	Red	<a href="#">PDF</a>										
<a href="#">81620067</a>	\$109.00	Green	<a href="#">PDF</a>										
<a href="#">81630067</a>	\$109.00	Yellow	<a href="#">PDF</a>										
<a href="#">81640067</a>	\$173.00	Clear	<a href="#">PDF</a>										
<a href="#">81650067</a>	\$173.00	Blue	<a href="#">PDF</a>										
<a href="#">81611055</a>	\$152.00	Red	<a href="#">PDF</a>	LED Blinking Light (1Hz flash frequency)	24V AC/DC	< 25mA	-	-4 to 122°F [-20 to 50°C]  IP65	up to 100,000h	107 [3.77]	37mm (PG29) mount  Terminal M3 ≤ 2.5 mm² AWG14	cULus file E164155, CE, RoHS	
<a href="#">81621055</a>	\$152.00	Green	<a href="#">PDF</a>										
<a href="#">81631055</a>	\$152.00	Yellow	<a href="#">PDF</a>										
<a href="#">81641055</a>	\$277.00	Clear	<a href="#">PDF</a>										
<a href="#">81651055</a>	\$277.00	Blue	<a href="#">PDF</a>										
<a href="#">81613055</a>	\$152.00	Red	<a href="#">PDF</a>	LED Rotating Light (120 rotations/min flash frequency)	24V AC/DC	< 40mA	≤ 0.5 A	-	up to 100,000h	107 [3.77]	37mm (PG29) mount  Terminal M3 ≤ 2.5 mm² AWG14	cULus file E164155, CE, RoHS	
<a href="#">81623055</a>	\$152.00	Green	<a href="#">PDF</a>										
<a href="#">81633055</a>	\$152.00	Yellow	<a href="#">PDF</a>										
<a href="#">81643055</a>	\$253.00	Clear	<a href="#">PDF</a>										
<a href="#">81653055</a>	\$253.00	Blue	<a href="#">PDF</a>										
<a href="#">81710055</a>	\$140.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (1Hz flash frequency)	24VDC	< 125mA	-	-	4,000,000 flashes	116 [4.09]	37mm (PG29) mount  Terminal M3 ≤ 2.5 mm² AWG14	cULus file E164155, CE, RoHS	
<a href="#">81720055</a>	\$140.00	Green	<a href="#">PDF</a>										
<a href="#">81730055</a>	\$140.00	Yellow	<a href="#">PDF</a>										
<a href="#">81740055</a>	\$146.00	Clear	<a href="#">PDF</a>										
<a href="#">81750055</a>	\$146.00	Blue	<a href="#">PDF</a>										
<a href="#">81710067</a>	\$140.00	Red	<a href="#">PDF</a>		115VAC	< 22mA	-	-	4,000,000 flashes	108 [3.81]	37mm (PG29) mount  Terminal M3 ≤ 2.5 mm² AWG14	cULus file E164155, CE, RoHS	
<a href="#">81720067</a>	\$138.00	Green	<a href="#">PDF</a>										
<a href="#">81730067</a>	\$138.00	Yellow	<a href="#">PDF</a>										
<a href="#">81740067</a>	\$140.00	Clear	<a href="#">PDF</a>										
<a href="#">81750067</a>	\$140.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Bulbs



Bulbs for Incandescent Permanent Visual Element					
Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95584035</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	5W	24VDC	up to 5,000h
<a href="#">95584038</a>	\$8.75			230VAC	
<a href="#">95584057</a>	\$8.75			115VAC	

# WERMA Signal Devices

SIGNALTECHNIK

## Visual 57/58mm Base Mount Beacons

### Features

- Choose from permanent incandescent, permanent LED, or flashing Xenon model
- Base mount installation
- 57 and 58mm diameters
- Light-intensive Xenon flash in flash models
- Bulb not included on incandescent models
- 2-year warranty



Visual 57/58mm Base Mount Beacons 200, 201 and 202 Series Selection Chart													
Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>35.5 mm Base Mount</b>													
<a href="#">20010000</a>	\$18.00	Red	<a href="#">PDF</a>	Incandescent Permanent Light 57mm	12–240 V AC/DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (Bulb sold separately)	-		up to 5,000h		50 [1.76]		
<a href="#">20020000</a>	\$18.00	Green	<a href="#">PDF</a>										
<a href="#">20030000</a>	\$18.00	Yellow	<a href="#">PDF</a>										
<a href="#">20040000</a>	\$18.00	Clear	<a href="#">PDF</a>										
<a href="#">20050000</a>	\$18.00	Blue	<a href="#">PDF</a>										
<a href="#">20110067</a>	\$78.00	Red	<a href="#">PDF</a>	LED Permanent Light 58mm	115VAC	< 25mA	≤ 0.5 A	-4 to 122°F [-20 to 50°C]	up to 100,000h	Polycarbonate cap Polyamide base	66 [2.33]	Up to 2.5 mm <sup>2</sup> Screwless CAGE CLAMP® - technology (8–14 AWG)	cULus file E164155, CE, RoHS
<a href="#">20120067</a>	\$78.00	Green	<a href="#">PDF</a>										
<a href="#">20130067</a>	\$78.00	Yellow	<a href="#">PDF</a>										
<a href="#">20140067</a>	\$109.00	Clear	<a href="#">PDF</a>										
<a href="#">20150067</a>	\$119.00	Blue	<a href="#">PDF</a>										
<a href="#">20110075</a>	\$62.00	Red	<a href="#">PDF</a>		24V AC/DC	< 45mA		IP65					
<a href="#">20120075</a>	\$62.00	Green	<a href="#">PDF</a>										
<a href="#">20130075</a>	\$62.00	Yellow	<a href="#">PDF</a>										
<a href="#">20140075</a>	\$123.00	Clear	<a href="#">PDF</a>										
<a href="#">20150075</a>	\$123.00	Blue	<a href="#">PDF</a>										
<a href="#">20210055</a>	\$100.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (0.75 Hz flash frequency, 1W flash energy) 58mm	24VDC	< 100mA	-		4,000,000 flashes		82 [2.89]		
<a href="#">20220055</a>	\$106.00	Green	<a href="#">PDF</a>										
<a href="#">20230055</a>	\$100.00	Yellow	<a href="#">PDF</a>										
<a href="#">20240055</a>	\$106.00	Clear	<a href="#">PDF</a>										
<a href="#">20250055</a>	\$106.00	Blue	<a href="#">PDF</a>										
<a href="#">20210067</a>	\$100.00	Red	<a href="#">PDF</a>		115VAC	< 20mA							
<a href="#">20220067</a>	\$106.00	Green	<a href="#">PDF</a>										
<a href="#">20230067</a>	\$100.00	Yellow	<a href="#">PDF</a>										
<a href="#">20240067</a>	\$106.00	Clear	<a href="#">PDF</a>										
<a href="#">20250067</a>	\$106.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Bulbs



Bulbs for Incandescent Permanent Visual Element					
Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95584035</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	5W	24VDC	up to 5,000h
<a href="#">95584038</a>	\$8.75			230VAC	
<a href="#">95584057</a>	\$8.75			115VAC	



# WERMA Signal Devices

SIGNALTECHNIK

## Visual 57/58mm Bracket Mount Beacons

### Features

- Choose from permanent incandescent, permanent LED, or flashing Xenon models
- Bracket mount installation
- 57 and 58mm diameters
- Light-intensive Xenon flash in flash models
- Bulb not included with incandescent models
- 2-year warranty



### Visual 57/58mm Bracket Mount Beacons 203, 204, and 205 Series Selection Chart

Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>25.8 mm (Bracket Mount)</b>													
<a href="#">20310000</a>	\$22.50	Red	<a href="#">PDF</a>	Incandescent Permanent Light 57mm	12-240V AC/ DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (bulb sold separately)	-		up to 5,000h		55 [1.94]		
<a href="#">20320000</a>	\$22.50	Green	<a href="#">PDF</a>										
<a href="#">20330000</a>	\$22.50	Yellow	<a href="#">PDF</a>										
<a href="#">20340000</a>	\$22.50	Clear	<a href="#">PDF</a>										
<a href="#">20350000</a>	\$22.50	Blue	<a href="#">PDF</a>										
<a href="#">20410067</a>	\$89.00	Red	<a href="#">PDF</a>	LED Permanent Light 58mm	115VAC	< 25mA	≤ 0.5 A	-4 to 122°F [-20 to 50°C]	up to 100,000h	Polycarbonate cap Polyamide base	72 [2.53]	2.5 mm <sup>2</sup> Screwless CAGE CLAMP® - technology (18-14 AWG)	cULus file E164155, CE, RoHS
<a href="#">20420067</a>	\$89.00	Green	<a href="#">PDF</a>										
<a href="#">20430067</a>	\$89.00	Yellow	<a href="#">PDF</a>										
<a href="#">20440067</a>	\$133.00	Clear	<a href="#">PDF</a>										
<a href="#">20450067</a>	\$133.00	Blue	<a href="#">PDF</a>										
<a href="#">20410075</a>	\$73.00	Red	<a href="#">PDF</a>										
<a href="#">20420075</a>	\$73.00	Green	<a href="#">PDF</a>										
<a href="#">20430075</a>	\$73.00	Yellow	<a href="#">PDF</a>										
<a href="#">20440075</a>	\$119.00	Clear	<a href="#">PDF</a>										
<a href="#">20450075</a>	\$119.00	Blue	<a href="#">PDF</a>										
<a href="#">20510055</a>	\$106.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (1Hz flash frequency, 1W flash energy) 58mm	24VDC	< 100mA	-	IP65	4,000,000 flashes		88 [3.10]		
<a href="#">20520055</a>	\$110.00	Green	<a href="#">PDF</a>										
<a href="#">20530055</a>	\$104.00	Yellow	<a href="#">PDF</a>										
<a href="#">20540055</a>	\$110.00	Clear	<a href="#">PDF</a>										
<a href="#">20550055</a>	\$110.00	Blue	<a href="#">PDF</a>										
<a href="#">20510067</a>	\$106.00	Red	<a href="#">PDF</a>										
<a href="#">20520067</a>	\$110.00	Green	<a href="#">PDF</a>										
<a href="#">20530067</a>	\$104.00	Yellow	<a href="#">PDF</a>										
<a href="#">20540067</a>	\$110.00	Clear	<a href="#">PDF</a>										
<a href="#">20550067</a>	\$110.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Bulbs



Bulbs for Incandescent Permanent Visual Element					
Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95584035</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	5W	24VDC	up to 5,000h
<a href="#">95584038</a>	\$8.75			230VAC	
<a href="#">95584057</a>	\$8.75			115VAC	

# WERMA Signal Devices

SIGNALTECHNIK

## Visual 57/58mm Tube Mount Beacons

### Features

- Choose from permanent incandescent, permanent LED, or flashing Xenon models
- Tube mount installation
- 57 and 58mm diameters
- Light-intensive Xenon flash in flash models
- Bulb not included with incandescent models
- Various mounting accessories available
- 2-year warranty



Visual 57/58mm Tube Mount Beacons 209 Series Selection Chart													
Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>M25x1.5 (Tube Mount)</b>													
<a href="#">20910000</a>	\$22.50	Red	<a href="#">PDF</a>	Incandescent Permanent 57mm	12-240V AC/ DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (Bulb sold separately)	-		up to 5,000h		62 [2.19]		
<a href="#">20920000</a>	\$22.50	Green	<a href="#">PDF</a>										
<a href="#">20930000</a>	\$22.50	Yellow	<a href="#">PDF</a>										
<a href="#">20940000</a>	\$22.50	Clear	<a href="#">PDF</a>										
<a href="#">20950000</a>	\$22.50	Blue	<a href="#">PDF</a>										
<a href="#">20911067</a>	\$88.00	Red	<a href="#">PDF</a>	LED Permanent Light 58mm	115VAC	< 25mA	< 0.5 A at 24V	-4°F to 122°F [-20°C to 50°C]	up to 100,000h	Polycarbonate cap Polyamide base	78 [2.75]	2.5 mm <sup>2</sup> Screwless CAGE CLAMP® - technology (18-14 AWG)	cULus file E164155, CE, RoHS
<a href="#">20921067</a>	\$88.00	Green	<a href="#">PDF</a>										
<a href="#">20931067</a>	\$88.00	Yellow	<a href="#">PDF</a>										
<a href="#">20941067</a>	\$132.00	Clear	<a href="#">PDF</a>										
<a href="#">20951067</a>	\$132.00	Blue	<a href="#">PDF</a>										
<a href="#">20911075</a>	\$73.00	Red	<a href="#">PDF</a>										
<a href="#">20921075</a>	\$73.00	Green	<a href="#">PDF</a>										
<a href="#">20931075</a>	\$73.00	Yellow	<a href="#">PDF</a>										
<a href="#">20941075</a>	\$118.00	Clear	<a href="#">PDF</a>										
<a href="#">20951075</a>	\$118.00	Blue	<a href="#">PDF</a>										
<a href="#">20912055</a>	\$104.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (0.75 Hz flash frequency, 1W flash energy) 58mm	24VDC	< 100mA	-		4,000,000 flashes		94 [3.32]		
<a href="#">20932055</a>	\$104.00	Yellow	<a href="#">PDF</a>										
<a href="#">20942055</a>	\$110.00	Clear	<a href="#">PDF</a>										
<a href="#">20952055</a>	\$110.00	Blue	<a href="#">PDF</a>										
<a href="#">20912067</a>	\$104.00	Red	<a href="#">PDF</a>										
<a href="#">20932067</a>	\$104.00	Yellow	<a href="#">PDF</a>										
<a href="#">20942067</a>	\$104.00	Clear	<a href="#">PDF</a>										
<a href="#">20952067</a>	\$110.00	Blue	<a href="#">PDF</a>		115VAC	< 20mA							

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Bulbs



Bulbs for Incandescent Permanent Visual Element					
Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95584035</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	5W	24VDC	up to 5,000h
<a href="#">95584038</a>	\$8.75			230VAC	
<a href="#">95584057</a>	\$8.75			115VAC	

# WERMA Signal Devices

## Visual 57/58 mm Base Mount Beacons (Tall Lens)

### Features

- Beacon with tall lens
- Base mount installation
- Choose from permanent incandescent, permanent LED, or flashing Xenon models
- 57 and 58mm diameters
- Light-intensive Xenon flash in flash models
- Bulb not included with incandescent models
- 2-year warranty



Visual 57/58mm Base Mount Beacons 210, 211, and 212 Series Selection Chart													
Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>35.5 mm (Base Mount)</b>													
<a href="#">21010000</a>	\$19.00	Red	<a href="#">PDF</a>	Incandescent Permanent Light 57mm	12-240V AC/DC max Depends on bulb selection. (Bulb sold separately)	Depends on bulb selection. (Bulb sold separately)	-		up to 5,000h		55 [1.94]		
<a href="#">21020000</a>	\$19.00	Green	<a href="#">PDF</a>										
<a href="#">21030000</a>	\$19.00	Yellow	<a href="#">PDF</a>										
<a href="#">21040000</a>	\$19.00	Clear	<a href="#">PDF</a>										
<a href="#">21050000</a>	\$19.00	Blue	<a href="#">PDF</a>										
<a href="#">21110067</a>	\$89.00	Red	<a href="#">PDF</a>	LED Permanent Light 58mm	115VAC	< 25mA	≤ 0.5 A	-4 to 122°F [-20 to 50°C] IP65 when mounted	up to 100,000h	Polycarbonate cap Polyamide base	72 [2.53]	2.5 mm <sup>2</sup> Screwless CAGE CLAMP® - technology (18-14 AWG)	cULus file E164155, CE, RoHS
<a href="#">21120067</a>	\$89.00	Green	<a href="#">PDF</a>										
<a href="#">21130067</a>	\$89.00	Yellow	<a href="#">PDF</a>										
<a href="#">21140067</a>	\$134.00	Clear	<a href="#">PDF</a>										
<a href="#">21150067</a>	\$134.00	Blue	<a href="#">PDF</a>										
<a href="#">21110075</a>	\$73.00	Red	<a href="#">PDF</a>										
<a href="#">21120075</a>	\$73.00	Green	<a href="#">PDF</a>										
<a href="#">21130075</a>	\$73.00	Yellow	<a href="#">PDF</a>										
<a href="#">21140075</a>	\$119.00	Clear	<a href="#">PDF</a>										
<a href="#">21150075</a>	\$119.00	Blue	<a href="#">PDF</a>										
<a href="#">21210055</a>	\$105.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (0.75 Hz flash frequency, 1W flash energy) 58mm	24VDC	< 100mA	-		4,000,000 flashes		88 [3.10]		
<a href="#">21220055</a>	\$110.00	Green	<a href="#">PDF</a>										
<a href="#">21230055</a>	\$110.00	Yellow	<a href="#">PDF</a>										
<a href="#">21240055</a>	\$119.00	Clear	<a href="#">PDF</a>										
<a href="#">21250055</a>	\$119.00	Blue	<a href="#">PDF</a>										
<a href="#">21210067</a>	\$105.00	Red	<a href="#">PDF</a>		115VAC	< 20mA	-						
<a href="#">21220067</a>	\$110.00	Green	<a href="#">PDF</a>										
<a href="#">21230067</a>	\$110.00	Yellow	<a href="#">PDF</a>										
<a href="#">21240067</a>	\$119.00	Clear	<a href="#">PDF</a>										
<a href="#">21250067</a>	\$119.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Bulbs



Bulbs for Incandescent Permanent Visual Element					
Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95501535</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	7W	24V AC/DC	up to 5,000h
<a href="#">95501537</a>	\$8.75			115VAC	
<a href="#">95501538</a>	\$8.75			230VAC	

# WERMA Signal Devices

SIGNALTECHNIK

## Visual 57/58 mm Bracket Mount Beacons (Tall Lens)

### Features

- Beacon with tall lens
- Bracket mount installation
- Choose from permanent incandescent, permanent LED, or flashing Xenon models
- 57 and 58mm diameters
- Light-intensive Xenon flash in flash models
- Bulb not included with incandescent models
- 2-year warranty



### Visual 57/58mm Bracket Mount Beacons (Tall Lens) 213, 214, and 215 Series Selection Chart

Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>25.8 mm (Bracket Mount)</b>													
<a href="#">21310000</a>	\$22.50	Red	<a href="#">PDF</a>	Incandescent Permanent Light 57mm	12-240V AC/DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (Bulb sold separately)	-		up to 5,000h		61 [2.15]		
<a href="#">21320000</a>	\$22.50	Green	<a href="#">PDF</a>										
<a href="#">21330000</a>	\$22.50	Yellow	<a href="#">PDF</a>										
<a href="#">21340000</a>	\$22.50	Clear	<a href="#">PDF</a>										
<a href="#">21350000</a>	\$22.50	Blue	<a href="#">PDF</a>										
<a href="#">21410067</a>	\$89.00	Red	<a href="#">PDF</a>	LED Permanent Light 58mm	115VAC	< 25mA	≤ 0.5 A	-4 to 122°F [-20 to 50°C] IP65 when mounted	up to 100,000h	Polycarbonate cap Polyamide base	78 [2.75]	2.5 mm <sup>2</sup> Screwless CAGE CLAMP® - technology (18-14 AWG)  Cable gland: m12 x1.5 Cable diameter: 3-6 mm	cULus file E164155, CE, RoHS
<a href="#">21420067</a>	\$89.00	Green	<a href="#">PDF</a>										
<a href="#">21430067</a>	\$89.00	Yellow	<a href="#">PDF</a>										
<a href="#">21440067</a>	\$133.00	Clear	<a href="#">PDF</a>										
<a href="#">21450067</a>	\$133.00	Blue	<a href="#">PDF</a>										
<a href="#">21410075</a>	\$75.00	Red	<a href="#">PDF</a>		24V AC/DC	< 45mA							
<a href="#">21420075</a>	\$75.00	Green	<a href="#">PDF</a>										
<a href="#">21430075</a>	\$75.00	Yellow	<a href="#">PDF</a>										
<a href="#">21440075</a>	\$119.00	Clear	<a href="#">PDF</a>										
<a href="#">21450075</a>	\$119.00	Blue	<a href="#">PDF</a>										
<a href="#">21510055</a>	\$109.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (1Hz flash frequency, 1W flash energy) 58mm	24VDC	< 100mA	-	4,000,000 flashes		94 [3.32]			
<a href="#">21520055</a>	\$119.00	Green	<a href="#">PDF</a>										
<a href="#">21530055</a>	\$109.00	Yellow	<a href="#">PDF</a>										
<a href="#">21540055</a>	\$119.00	Clear	<a href="#">PDF</a>										
<a href="#">21550055</a>	\$119.00	Blue	<a href="#">PDF</a>										
<a href="#">21510067</a>	\$109.00	Red	<a href="#">PDF</a>		115VAC	< 20mA							
<a href="#">21520067</a>	\$119.00	Green	<a href="#">PDF</a>										
<a href="#">21530067</a>	\$109.00	Yellow	<a href="#">PDF</a>										
<a href="#">21540067</a>	\$119.00	Clear	<a href="#">PDF</a>										
<a href="#">21550067</a>	\$119.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Bulbs



Bulbs for Incandescent Permanent Visual Element					
Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95501535</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	7W	24V AC/DC	up to 5,000h
<a href="#">95501537</a>	\$8.75			115VAC	
<a href="#">95501538</a>	\$8.75			230VAC	

# WERMA Signal Devices

SIGNALTECHNIK

## Visual 57/58 mm Tube Mount Beacons (Tall Lens)

### Features

- Beacon with tall lens
- Choose from permanent incandescent, permanent LED, or flashing Xenon models
- Tube mount installation 57 and 58 mm diameters
- Light-intensive Xenon flash in flash models
- Bulb not included with incandescent models
- Various mounting accessories available
- 2-year warranty



### Visual 57/58 mm Tube Mount Beacons (Tall Lens) 219 Series Selection Chart

Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>M25x1.5 (Tube Mount)</b>													
<a href="#">21910000</a>	\$24.50	Red	<a href="#">PDF</a>	Incandescent Permanent Light 57mm	12-240V AC/DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (Bulb sold separately)	-		up to 5,000h		67 [2.37]		
<a href="#">21920000</a>	\$24.50	Green	<a href="#">PDF</a>										
<a href="#">21930000</a>	\$24.50	Yellow	<a href="#">PDF</a>										
<a href="#">21940000</a>	\$24.50	Clear	<a href="#">PDF</a>										
<a href="#">21950000</a>	\$24.50	Blue	<a href="#">PDF</a>										
<a href="#">21911067</a>	\$94.00	Red	<a href="#">PDF</a>	LED Permanent Light 58mm	115VAC	< 25mA	≤ 0.5A	-4 to 122°F [-20 to 50°C] IP65 when mounted	up to 100,000h	Polycarbonate cap Polyamide base	84 [2.96]		Max. 2.5 mm <sup>2</sup> Screwless CAGE CLAMP® - technology (18-14 AWG)  cULus file E164155, CE, RoHS
<a href="#">21921067</a>	\$94.00	Green	<a href="#">PDF</a>										
<a href="#">21931067</a>	\$94.00	Yellow	<a href="#">PDF</a>										
<a href="#">21941067</a>	\$139.00	Clear	<a href="#">PDF</a>										
<a href="#">21951067</a>	\$139.00	Blue	<a href="#">PDF</a>										
<a href="#">21911075</a>	\$78.00	Red	<a href="#">PDF</a>		24V AC/DC	< 45mA							
<a href="#">21921075</a>	\$78.00	Green	<a href="#">PDF</a>										
<a href="#">21931075</a>	\$78.00	Yellow	<a href="#">PDF</a>										
<a href="#">21941075</a>	\$124.00	Clear	<a href="#">PDF</a>										
<a href="#">21951075</a>	\$124.00	Blue	<a href="#">PDF</a>										
<a href="#">21912055</a>	\$109.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (1Hz flash frequency, 1W flash energy)  58mm	24VDC	< 100mA	-		4,000,000 flashes		100 [3.52]		
<a href="#">21932055</a>	\$109.00	Yellow	<a href="#">PDF</a>										
<a href="#">21942055</a>	\$118.00	Clear	<a href="#">PDF</a>										
<a href="#">21952055</a>	\$118.00	Blue	<a href="#">PDF</a>		115VAC	< 20mA							
<a href="#">21912067</a>	\$109.00	Red	<a href="#">PDF</a>										
<a href="#">21932067</a>	\$109.00	Yellow	<a href="#">PDF</a>										
<a href="#">21942067</a>	\$118.00	Clear	<a href="#">PDF</a>										
<a href="#">21952067</a>	\$118.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Bulbs



Bulbs for Incandescent Permanent Visual Element					
Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95501535</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	7W	24V AC/DC	up to 5,000h
<a href="#">95501537</a>	\$8.75			115VAC	
<a href="#">95501538</a>	\$8.75			230VAC	





# Signal Devices

## Visual 75mm Base Mount Beacons

### Features

- Choose from permanent incandescent, permanent LED, or flashing Xenon models
- 75mm diameter
- Base mount installation
- Through-hole, cable diameter maximum 10mm
- Light-intensive Xenon flash in flash models
- Bulb not included with incandescent models
- Various mounting accessories available
- 2-year warranty



Visual 75mm Base Mount Beacons 220, 221, and 222 Series Selection Chart													
Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>48mm (Base Mount)</b>													
<a href="#">22010000</a>	\$33.50	Red	<a href="#">PDF</a>	Incandescent Permanent Light	12-240V AC/DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (Bulb sold separately)	-		up to 5,000h		97 [3.42]		
<a href="#">22020000</a>	\$33.50	Green	<a href="#">PDF</a>										
<a href="#">22030000</a>	\$33.50	Yellow	<a href="#">PDF</a>										
<a href="#">22040000</a>	\$33.50	Clear	<a href="#">PDF</a>										
<a href="#">22050000</a>	\$33.50	Blue	<a href="#">PDF</a>										
<a href="#">22110067</a>	\$100.00	Red	<a href="#">PDF</a>	LED Permanent Light	115VAC	< 25mA	0.5A	-4 to 122°F [-20 to 50°C]	up to 100,000h	Polycarbonate cap Polyamide base	106 [3.74]		
<a href="#">22120067</a>	\$100.00	Green	<a href="#">PDF</a>										
<a href="#">22130067</a>	\$100.00	Yellow	<a href="#">PDF</a>										
<a href="#">22140067</a>	\$145.00	Clear	<a href="#">PDF</a>										
<a href="#">22150067</a>	\$145.00	Blue	<a href="#">PDF</a>										
<a href="#">22110075</a>	\$85.00	Red	<a href="#">PDF</a>		24V AC/DC	< 45mA		IP65 when mounted			133 [4.69]		
<a href="#">22120075</a>	\$85.00	Green	<a href="#">PDF</a>										
<a href="#">22130075</a>	\$85.00	Yellow	<a href="#">PDF</a>										
<a href="#">22140075</a>	\$127.00	Clear	<a href="#">PDF</a>										
<a href="#">22150075</a>	\$127.00	Blue	<a href="#">PDF</a>										
<a href="#">22210055</a>	\$121.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (1Hz flash frequency, 1W flash energy)	24VDC	< 100mA	-		4,000,000 flashes		151 [5.33]		
<a href="#">22220055</a>	\$127.00	Green	<a href="#">PDF</a>										
<a href="#">22230055</a>	\$121.00	Yellow	<a href="#">PDF</a>										
<a href="#">22240055</a>	\$127.00	Clear	<a href="#">PDF</a>										
<a href="#">22250055</a>	\$127.00	Blue	<a href="#">PDF</a>										
<a href="#">22210067</a>	\$121.00	Red	<a href="#">PDF</a>		115VAC	< 20mA							
<a href="#">22220067</a>	\$127.00	Green	<a href="#">PDF</a>										
<a href="#">22230067</a>	\$121.00	Yellow	<a href="#">PDF</a>										
<a href="#">22240067</a>	\$127.00	Clear	<a href="#">PDF</a>										
<a href="#">22250067</a>	\$127.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Bulbs



Bulbs for Incandescent Permanent Visual Element					
Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95501535</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	7W	24V AC/DC	up to 5,000h
<a href="#">95501537</a>	\$8.75			115VAC	
<a href="#">95501538</a>	\$8.75			230VAC	



**WERMA**  
SIGNALTECHNIK

# Signal Devices

## Visual 75mm Bracket Mount Beacons

### Features

- Choose from permanent incandescent, permanent LED, or flashing Xenon models
- 75mm diameter
- Bracket mount installation
- Light-intensive Xenon flash in flash models
- Bulb not included with incandescent models
- Various mounting accessories available
- 2-year warranty



Visual 75mm Bracket Mount Beacons 223, 224, and 225 Series Selection Chart													
Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>48mm (Bracket Mount)</b>													
<a href="#">22310000</a>	\$39.50	Red	<a href="#">PDF</a>	Incandescent Permanent Light	12–240V AC/DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (bulb sold separately)	-		up to 5,000h		103 [3.63]		
<a href="#">22320000</a>	\$39.50	Green	<a href="#">PDF</a>										
<a href="#">22330000</a>	\$39.50	Yellow	<a href="#">PDF</a>										
<a href="#">22340000</a>	\$39.50	Clear	<a href="#">PDF</a>										
<a href="#">22350000</a>	\$39.50	Blue	<a href="#">PDF</a>										
<a href="#">22410067</a>	\$110.00	Red	<a href="#">PDF</a>	LED Permanent Light	115VAC	< 25mA	≤ 0.5 A	-4 to 122°F [-20 to 50°C] IP65 when mounted	up to 100,000h	Polycarbonate cap Polyamide base	142 [5.01]	2.5 mm² Screwless CAGE CLAMP® - technology (18–14 AWG) Cable gland: m12 x1.5 Cable diameter: 3–6 mm	cULus file E164155, CE, RoHS
<a href="#">22420067</a>	\$110.00	Green	<a href="#">PDF</a>										
<a href="#">22430067</a>	\$110.00	Yellow	<a href="#">PDF</a>										
<a href="#">22440067</a>	\$145.00	Clear	<a href="#">PDF</a>										
<a href="#">22450067</a>	\$145.00	Blue	<a href="#">PDF</a>										
<a href="#">22410075</a>	\$97.00	Red	<a href="#">PDF</a>										
<a href="#">22420075</a>	\$97.00	Green	<a href="#">PDF</a>										
<a href="#">22430075</a>	\$97.00	Yellow	<a href="#">PDF</a>										
<a href="#">22440075</a>	\$131.00	Clear	<a href="#">PDF</a>										
<a href="#">22450075</a>	\$131.00	Blue	<a href="#">PDF</a>										
<a href="#">22510055</a>	\$122.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (0.75 Hz flash frequency, 1W flash energy)	24VDC	< 100mA	-		4,000,000 flashes		151 [5.33]		
<a href="#">22520055</a>	\$128.00	Green	<a href="#">PDF</a>										
<a href="#">22530055</a>	\$122.00	Yellow	<a href="#">PDF</a>										
<a href="#">22540055</a>	\$128.00	Clear	<a href="#">PDF</a>										
<a href="#">22550055</a>	\$128.00	Blue	<a href="#">PDF</a>										
<a href="#">22510067</a>	\$122.00	Red	<a href="#">PDF</a>		115VAC	< 20mA	-						
<a href="#">22520067</a>	\$128.00	Green	<a href="#">PDF</a>										
<a href="#">22530067</a>	\$122.00	Yellow	<a href="#">PDF</a>										
<a href="#">22540067</a>	\$128.00	Clear	<a href="#">PDF</a>										
<a href="#">22550067</a>	\$128.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

## Bulbs



Bulbs for Incandescent Permanent Visual Element					
Part Number	Price	Description	Wattage	Voltage	Life Duration
<a href="#">95501535</a>	\$8.75	Bulb for Incandescent Light BA15d Bayonet Socket	7W	24V AC/DC	up to 5,000h
<a href="#">95501537</a>	\$8.75			115VAC	
<a href="#">95501538</a>	\$8.75			230VAC	

# WERMA Signal Devices

SIGNALTECHNIK

## Visual 98mm Base Mount Beacons Features

- Choose from permanent incandescent, permanent LED, flashing Xenon, EVS (Enhanced Visibility System) flashing LED, and rotating models
- Base mount installation
- 98mm diameter
- Light-intensive Xenon flash in flash models
- Bulb not included with 826 incandescent models
- 25W bulb included with 827 incandescent models
- Various mounting accessories available
- 2-year warranty



### Visual 98mm Base Mount Beacons 826, 827, and 828 Series Selection Chart

Part Number	Price	Color	Drawing link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals
<b>74mm Base Mount</b>													
<a href="#">82610000</a>	\$41.50	Red	<a href="#">PDF</a>	Incandescent Permanent Light 98mm	12-240V AC/DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (bulb sold separately)	-				180 [6.35]		
<a href="#">82620000</a>	\$45.00	Green	<a href="#">PDF</a>										
<a href="#">82630000</a>	\$41.50	Yellow	<a href="#">PDF</a>										
<a href="#">82640000</a>	\$45.00	Clear	<a href="#">PDF</a>										
<a href="#">82650000</a>	\$45.00	Blue	<a href="#">PDF</a>										
<a href="#">82710075</a>	\$101.00	Red	<a href="#">PDF</a>	Incandescent Blinking Light (1.5 Hz blinking frequency, 5Ws flash energy) 98mm	24V AC/DC	max. 3.0 A		-4 to 122°F [-20 to 50°C]	Up to 5,000h	207 [7.30]	Terminal screws Max 2.5 mm <sup>2</sup> AWG 16-14 Cable diameter 5-8 mm	cULus file E164155, CE, RoHS	
<a href="#">82720075</a>	\$109.00	Green	<a href="#">PDF</a>										
<a href="#">82730075</a>	\$101.00	Yellow	<a href="#">PDF</a>										
<a href="#">82740075</a>	\$109.00	Clear	<a href="#">PDF</a>										
<a href="#">82750075</a>	\$109.00	Blue	<a href="#">PDF</a>										
<a href="#">82710077</a>	\$101.00	Red	<a href="#">PDF</a>										
<a href="#">82720077</a>	\$109.00	Green	<a href="#">PDF</a>										
<a href="#">82730077</a>	\$101.00	Yellow	<a href="#">PDF</a>										
<a href="#">82740077</a>	\$109.00	Clear	<a href="#">PDF</a>										
<a href="#">82750077</a>	\$109.00	Blue	<a href="#">PDF</a>										
<a href="#">82810055</a>	\$122.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (1Hz flash frequency, 1W flash energy) 98mm	24VDC	300mA	≤ 3.0 A	IP65 when mounted	4,000,000 flashes	220 [7.76]			
<a href="#">82820055</a>	\$129.00	Green	<a href="#">PDF</a>										
<a href="#">82830055</a>	\$122.00	Yellow	<a href="#">PDF</a>										
<a href="#">82840055</a>	\$129.00	Clear	<a href="#">PDF</a>										
<a href="#">82850055</a>	\$207.00	Blue	<a href="#">PDF</a>										
<a href="#">82810067</a>	\$122.00	Red	<a href="#">PDF</a>		115VAC	65mA 50-60 Hz							
<a href="#">82820067</a>	\$129.00	Green	<a href="#">PDF</a>										
<a href="#">82830067</a>	\$122.00	Yellow	<a href="#">PDF</a>										
<a href="#">82840067</a>	\$129.00	Clear	<a href="#">PDF</a>										
<a href="#">82850067</a>	\$207.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

## Bulbs



[95582635](#)

Bulbs						
Part Number	Price	Description	Wattage	Voltage	For Use With	Life Duration
<a href="#">95582635</a>	\$8.75	Bulb for incandescent light BA15d bayonet socket	15W	24V AC/DC	826xxxxx	up to 5,000h
<a href="#">95582637</a>	\$8.75			115VAC		
<a href="#">95582638</a>	\$8.75			230VAC		
<a href="#">95582735</a>	\$8.50	Bulb for blinking incandescent light B15d bayonet socket	25W	24V AC/DC	827xxxxx	up to 2,000h
<a href="#">95582737</a>	\$8.50			115VAC		
<a href="#">95588524</a>	\$12.00	Halogen bulb G6.35	20W	12V	885xxx78	
<a href="#">95588525</a>	\$12.00			24V	885xxx75	



[95582735](#)



[95588524](#)





## Visual 98mm Base Mount Beacons

Visual 98mm Base Mount Beacons 829 Series Selection Chart																					
Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals								
<b>74mm (Base Mount)</b>																					
<a href="#">82910055</a>	\$156.00	Red	<a href="#">PDF</a>	Permanent/ Blinking LED (blinking frequency 1.5 Hz) 98mm	24VDC	≤ 150mA					200 [7.05]										
<a href="#">82920055</a>	\$209.00	Green	<a href="#">PDF</a>																		
<a href="#">82930055</a>	\$156.00	Yellow	<a href="#">PDF</a>																		
<a href="#">82950055</a>	\$219.00	Blue	<a href="#">PDF</a>	Rotating LED 98mm	24VDC	≤ 170mA					215 [7.58]	Terminal screw ≤ 2.5 mm <sup>2</sup> AWG 16-14 Cable diameter 5-7 mm									
<a href="#">82911055</a>	\$185.00	Red	<a href="#">PDF</a>																		
<a href="#">82921055</a>	\$283.00	Green	<a href="#">PDF</a>																		
<a href="#">82931055</a>	\$185.00	Yellow	<a href="#">PDF</a>																		
<a href="#">82941055</a>	\$283.00	Clear	<a href="#">PDF</a>																		
<a href="#">82951055</a>	\$283.00	Blue	<a href="#">PDF</a>																		
<a href="#">82911068</a>	\$214.00	Red	<a href="#">PDF</a>		115-230 VAC	≤ 200mA															
<a href="#">82921068</a>	\$312.00	Green	<a href="#">PDF</a>																		
<a href="#">82931068</a>	\$214.00	Yellow	<a href="#">PDF</a>																		
<a href="#">82941068</a>	\$312.00	Clear	<a href="#">PDF</a>																		
<a href="#">82951068</a>	\$312.00	Blue	<a href="#">PDF</a>																		
<a href="#">82912055</a>	\$167.00	Red	<a href="#">PDF</a>											Double Flash LED 98mm	24VDC	≤ 100mA					205 [7.23]
<a href="#">82932055</a>	\$168.00	Yellow	<a href="#">PDF</a>																		
<a href="#">82942055</a>	\$255.00	Clear	<a href="#">PDF</a>																		
<a href="#">82912068</a>	\$188.00	Red	<a href="#">PDF</a>	115-230 VAC	≤ 100mA																
<a href="#">82932068</a>	\$188.00	Yellow	<a href="#">PDF</a>																		
<a href="#">82942068</a>	\$263.00	Clear	<a href="#">PDF</a>																		
<a href="#">82913067</a>	\$168.00	Red	<a href="#">PDF</a>	Permanent LED 98mm	115VAC								≤ 30mA	≤ 500mA				200 [7.05]			
<a href="#">82923067</a>	\$225.00	Green	<a href="#">PDF</a>																		
<a href="#">82933067</a>	\$168.00	Yellow	<a href="#">PDF</a>																		
<a href="#">82953067</a>	\$237.00	Blue	<a href="#">PDF</a>																		
<a href="#">82915055</a>	\$232.00	Red	<a href="#">PDF</a>	Permanent/ blinking / rotating LED 98mm	24VDC	≤ 300mA					205 [7.23]	Terminal screws ≤ 2.5 mm <sup>2</sup> AWG 24-11 Cable diameter 5-7 mm									
<a href="#">82925055</a>	\$381.00	Green	<a href="#">PDF</a>																		
<a href="#">82935055</a>	\$232.00	Yellow	<a href="#">PDF</a>																		
<a href="#">82955055</a>	\$381.00	Blue	<a href="#">PDF</a>																		
<a href="#">82919055</a>	\$206.00	Red	<a href="#">PDF</a>											*Enhanced Visibility System (EVS) flashing LED 98mm	24VDC						215 [7.58]
<a href="#">82939055</a>	\$206.00	Yellow	<a href="#">PDF</a>																		
<a href="#">82949055</a>	\$313.00	Clear	<a href="#">PDF</a>																		
<a href="#">82919068</a>	\$233.00	Red	<a href="#">PDF</a>	115-230 VAC	≤ 150mA																
<a href="#">82939068</a>	\$233.00	Yellow	<a href="#">PDF</a>																		
<a href="#">82949068</a>	\$323.00	Clear	<a href="#">PDF</a>																		

\*EVS models provide a random flash pattern for increased visibility.


To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

# WERMA Signal Devices


## Visual 98mm Base Mount Beacons

### Schematics

**826, 827, 828, Series and All 829s except:  
82915055, 82925055, 82935055, 82955055**



**Permanent/Blinking/Rotating LED:  
82915055, 82925055, 82935055, 82955055**

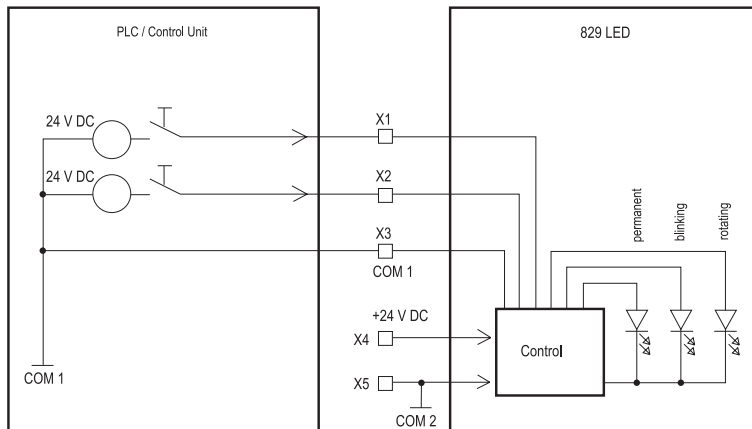

With positive logic	
X1	1 = +24 V, 0 = COM 1
X2	1 = +24 V, 0 = COM 1
X3	COM 1
X4	+24 V
X5	COM 2
With negative logic	
X1	1 = -24 V, 0 = COM 1
X2	1 = -24 V, 0 = COM 1
X3	COM 1
X4	+24 V
X5	COM 2

Binary Code (for external triggering)

X1	X2	mode	
0	0	Permanent	ON/Solid
0	1	Rotating	
1	0	Blinking	
1	1	Permanent	ON/Solid



# Signal Devices

## Visual 98mm Tube Mount Beacons

### Features

- Choose from permanent incandescent, permanent LED, flashing Xenon, EVS (Enhanced Visibility System) flashing LED, and rotating models
- Tube mount installation
- 98mm diameter
- Light-intensive Xenon flash in flash models
- Bulb not included with 826 incandescent models
- Various mounting accessories available
- 2-year warranty



### Visual 98mm Tube Mount Beacons 826 and 828 Series Selection Chart

Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight [g]	Connection	Agency Approvals
<b>M25x1.5 (Tube Mount)</b>													
<a href="#">82611000</a>	\$52.00	Red	<a href="#">PDF</a>	Incandescent Permanent Light 98mm	12-240V AC/DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (bulb sold separately)	-	-4 to 122°F [-20 to 50°C] IP65 when mounted	Up to 5,000h	Polycarbonate cap Polycarbonate/ABS base	231 [8.15]	Terminal screws Max 1.5 mm <sup>2</sup> Cable diameter 5-7 mm	cULus file E164155, CE, RoHS
<a href="#">82621000</a>	\$52.00	Green	<a href="#">PDF</a>										
<a href="#">82631000</a>	\$52.00	Yellow	<a href="#">PDF</a>										
<a href="#">82641000</a>	\$52.00	Clear	<a href="#">PDF</a>										
<a href="#">82651000</a>	\$52.00	Blue	<a href="#">PDF</a>										
<a href="#">82814055</a>	\$130.00	Red	<a href="#">PDF</a>	Xenon Flashing Light (1Hz flash frequency, 1W flash energy) 98mm	24VDC	300mA	-	-4 to 122°F [-20 to 50°C] IP65 when mounted	Min 4,000,000 flashes	Polycarbonate cap Polycarbonate/ABS base	272 [9.59]	Terminal screws Max 2.5 mm <sup>2</sup> Cable diameter 5-7 mm	
<a href="#">82824055</a>	\$138.00	Green	<a href="#">PDF</a>										
<a href="#">82834055</a>	\$130.00	Yellow	<a href="#">PDF</a>										
<a href="#">82844055</a>	\$138.00	Clear	<a href="#">PDF</a>										
<a href="#">82854055</a>	\$138.00	Blue	<a href="#">PDF</a>										
<a href="#">82814067</a>	\$130.00	Red	<a href="#">PDF</a>		115VAC	65mA 50-60 Hz	-	-4 to 122°F [-20 to 50°C] IP65 when mounted	Min 4,000,000 flashes	Polycarbonate cap Polycarbonate/ABS base	262 [9.24]	Terminal screws Max 2.5 mm <sup>2</sup> Cable diameter 5-7 mm	
<a href="#">82824067</a>	\$138.00	Green	<a href="#">PDF</a>										
<a href="#">82834067</a>	\$130.00	Yellow	<a href="#">PDF</a>										
<a href="#">82844067</a>	\$138.00	Clear	<a href="#">PDF</a>										
<a href="#">82854067</a>	\$138.00	Blue	<a href="#">PDF</a>										

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

## Bulbs



[95582635](#)

Bulbs						
Part Number	Price	Description	Wattage	Voltage	For Use With	Life Duration
<a href="#">95582635</a>	\$8.75	Bulb for incandescent light BA15d bayonet socket	15W	24V AC/DC	826xxxx	up to 5,000h
<a href="#">95582637</a>	\$8.75			115VAC		
<a href="#">95582638</a>	\$8.75			230VAC		
<a href="#">95588524</a>	\$12.00	Halogen bulb G6.35	20W	12V	885xxx78	Up to 2,000h
<a href="#">95588525</a>	\$12.00			24V		



[95588524](#)



**WERMA**  
SIGNALTECHNIK

# Signal Devices

## Visual 98mm Tube Mount Beacons

Visual 98mm Tube Mount Beacons 829 Series Selection Chart													
Part Number	Price	Color	Drawing Link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g[oz]	Connection	Agency Approvals
<b>M25x1.5 (Tube Mount)</b>													
<a href="#">82910755</a>	\$170.00	Red	<a href="#">PDF</a>	Permanent/ Blinking LED (blinking frequency 1.5 Hz)	24VDC	≤ 150mA	≤ 500mA	-4 to 122°F [-20 to 50°C]  IP65 when mounted	up to 50,000h	Polycarbonate cap Polycarbonate/ ABS base	246 [8.68]	Terminal screws ≤ 2.5 mm <sup>2</sup> Cable diameter 5-7 mm	cULus file E164155, CE, RoHS
<a href="#">82920755</a>	\$224.00	Green	<a href="#">PDF</a>										
<a href="#">82930755</a>	\$170.00	Yellow	<a href="#">PDF</a>										
<a href="#">82950755</a>	\$235.00	Blue	<a href="#">PDF</a>										
<a href="#">82911755</a>	\$199.00	Red	<a href="#">PDF</a>	Rotating LED 98mm	24VDC	≤ 170mA	≤ 500mA	-4 to 122°F [-20 to 50°C]  IP65 when mounted	up to 50,000h	Polycarbonate cap Polycarbonate/ ABS base	259 [9.14]	Terminal screws ≤ 2.5 mm <sup>2</sup> Cable diameter 5-7 mm	
<a href="#">82921755</a>	\$306.00	Green	<a href="#">PDF</a>										
<a href="#">82931755</a>	\$199.00	Yellow	<a href="#">PDF</a>										
<a href="#">82941755</a>	\$306.00	Clear	<a href="#">PDF</a>										
<a href="#">82951755</a>	\$306.00	Blue	<a href="#">PDF</a>										
<a href="#">82911768</a>	\$230.00	Red	<a href="#">PDF</a>		115-230 VAC	≤ 200mA	≤ 500mA						
<a href="#">82921768</a>	\$335.00	Green	<a href="#">PDF</a>										
<a href="#">82931768</a>	\$230.00	Yellow	<a href="#">PDF</a>										
<a href="#">82941768</a>	\$335.00	Clear	<a href="#">PDF</a>										
<a href="#">82951768</a>	\$335.00	Blue	<a href="#">PDF</a>										
<a href="#">82912755</a>	\$179.00	Red	<a href="#">PDF</a>	Double Flash LED 98mm	24VDC	≤ 30mA	≤ 500mA	-4 to 122°F [-20 to 50°C]  IP65 when mounted	up to 50,000h	Polycarbonate cap Polycarbonate/ ABS base	257 [9.07]	Terminal screws ≤ 2.5 mm <sup>2</sup> Cable diameter 5-7 mm	
<a href="#">82932755</a>	\$180.00	Yellow	<a href="#">PDF</a>										
<a href="#">82942755</a>	\$275.00	Clear	<a href="#">PDF</a>		115-230 VAC	≤ 120mA	≤ 500mA						
<a href="#">82912768</a>	\$203.00	Red	<a href="#">PDF</a>										
<a href="#">82932768</a>	\$203.00	Yellow	<a href="#">PDF</a>										
<a href="#">82942768</a>	\$283.00	Clear	<a href="#">PDF</a>										
<a href="#">82913767</a>	\$180.00	Red	<a href="#">PDF</a>	Permanent LED 98mm	115VAC	≤ 30mA	≤ 500mA	-4 to 122°F [-20 to 50°C]  IP65 when mounted	up to 50,000h	Polycarbonate cap Polycarbonate/ ABS base	251 [8.85]	Terminal screws ≤ 2.5 mm <sup>2</sup> Cable diameter 5-7 mm	
<a href="#">82923767</a>	\$240.00	Green	<a href="#">PDF</a>										
<a href="#">82933767</a>	\$180.00	Yellow	<a href="#">PDF</a>										
<a href="#">82953767</a>	\$257.00	Blue	<a href="#">PDF</a>										
<a href="#">82915755</a>	\$252.00	Red	<a href="#">PDF</a>	Permanent/ blinking / rotating LED 98mm	24VDC	≤ 300mA	≤ 500mA	-4 to 122°F [-20 to 50°C]  IP65 when mounted	up to 50,000h	Polycarbonate cap Polycarbonate/ ABS base	256 [9.03]	Terminal screws ≤ 2.5 mm <sup>2</sup> AWG 22-14 Cable diameter 5-7 mm	
<a href="#">82925755</a>	\$411.00	Green	<a href="#">PDF</a>										
<a href="#">82935755</a>	\$252.00	Yellow	<a href="#">PDF</a>										
<a href="#">82955755</a>	\$411.00	Blue	<a href="#">PDF</a>										
<a href="#">82919755</a>	\$220.00	Red	<a href="#">PDF</a>	*Enhanced Visibility System (EVS) flashing LED 98mm	24VDC	≤ 300mA	< 500mA	-4 to 122°F [-20 to 50°C]  IP65 when mounted	up to 50,000h	Polycarbonate cap Polycarbonate/ ABS base	256 [9.03]	Terminal screws ≤ 2.5 mm <sup>2</sup> AWG 22-14 Cable diameter 5-7 mm	
<a href="#">82939755</a>	\$220.00	Yellow	<a href="#">PDF</a>										
<a href="#">82949755</a>	\$336.00	Clear	<a href="#">PDF</a>		115-230 VAC	≤ 150mA							
<a href="#">82919768</a>	\$254.00	Red	<a href="#">PDF</a>										
<a href="#">82939768</a>	\$254.00	Yellow	<a href="#">PDF</a>										
<a href="#">82949768</a>	\$348.00	Clear	<a href="#">PDF</a>										

\*EVS models provide a random flash pattern for increased visibility.



To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.



# Signal Devices

## Beacon Accessories


WERMA Beacons Accessories						
Part Number	Price	Drawing Link	Description	Operating Temp.	Material	Weight
<b>Installation Beacon Accessories</b>						
<a href="#">97581201</a>	\$15.00	<a href="#">PDF</a>	WERMA tube adapter, tube mount, 57mm diameter, black, polyamide. For use with beacons with 37mm (PG 29) mounting installation.	-4 to 122°F [-20 to 50°C]	Polyamide / Fiberglass	1.13 g [0.04 oz]
<a href="#">97581202</a>	\$14.50	<a href="#">PDF</a>	WERMA surface mounting base, base mount, black, polyamide. For use with beacons with 37mm (PG 29) mounting installation.		Polyamide / Fiberglass with rubber seal	2.83 g [0.1 oz]
<a href="#">97581503</a>	\$46.00	<a href="#">PDF</a>	WERMA beacon enclosure, surface mount, 1 hole. For use with beacons with 37mm (PG 29) mounting installation.		Polycarbonate/ABS blend	8.5 g [0.3 oz]
<a href="#">97581507</a>	\$64.00	<a href="#">PDF</a>	WERMA beacon enclosure, surface mount, 2 holes. For use with beacons with 37mm (PG 29) mounting installation.			14.17 g [0.5 oz]
<a href="#">97581508</a>	\$84.00	<a href="#">PDF</a>	WERMA beacon enclosure, surface mount, 3 holes. For use with beacons with 37mm (PG 29) mounting installation.			17g [0.6 oz]
<a href="#">97581522</a>	\$6.00	<a href="#">PDF</a>	WERMA anti-twist washer, stainless steel. For use with Werma beacons with 37mm (PG 29) mounting installation.		304 Stainless steel	0.57 g [0.02 oz]
<b>Freestanding Beacon Accessories</b>						
<a href="#">96000001</a>	\$18.00	<a href="#">PDF</a>	WERMA mounting bracket, tube mount, black, polyamide. For use with 50mm or 70mm terminal elements. M16 x 1.5mm cable gland included.	-4 to 122°F [-20 to 50°C]	Polyamide	57g [2.01 oz]
<a href="#">97520901</a>	\$21.50	<a href="#">PDF</a>	WERMA plastic base with integrated tube, base mount, 70mm diameter, 110mm length, black, polyamide. For use with 209 or 219 series beacons.		Polyamide	0.1 lbs [1.6 oz]
<a href="#">97520902</a>	\$6.00	<a href="#">PDF</a>	WERMA cable gland, M25 x 1.5mm thread type, polyamide, black, accepts 8 to 17mm diameter cable, IP68.		Nylon	0.1 lbs [1.6 oz]
<a href="#">97582603</a>	\$45.00	<a href="#">PDF</a>	WERMA galvanized wire guard, steel. For use with 826, 827, 828 or 829 series industrial signal beacons.		Wire D 3mm, chromed	140g [4.93 oz]
<a href="#">97582605</a>	\$10.50	<a href="#">PDF</a>	WERMA mounting bracket, wall mount, black, ABS/ polycarbonate. For use with 826, 827, 828 and 829 series industrial signal beacons.		Polycarbonate/ABS blend	62g [2.19 oz]

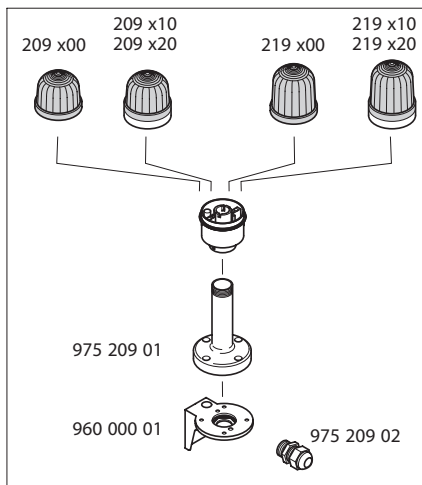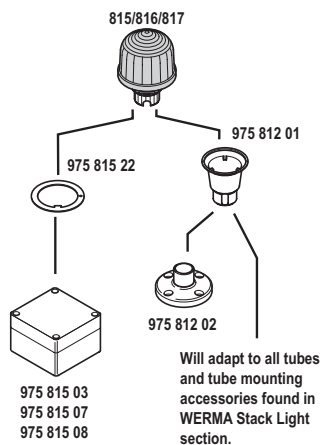



# Audible Signal Devices

## Product Family Overview

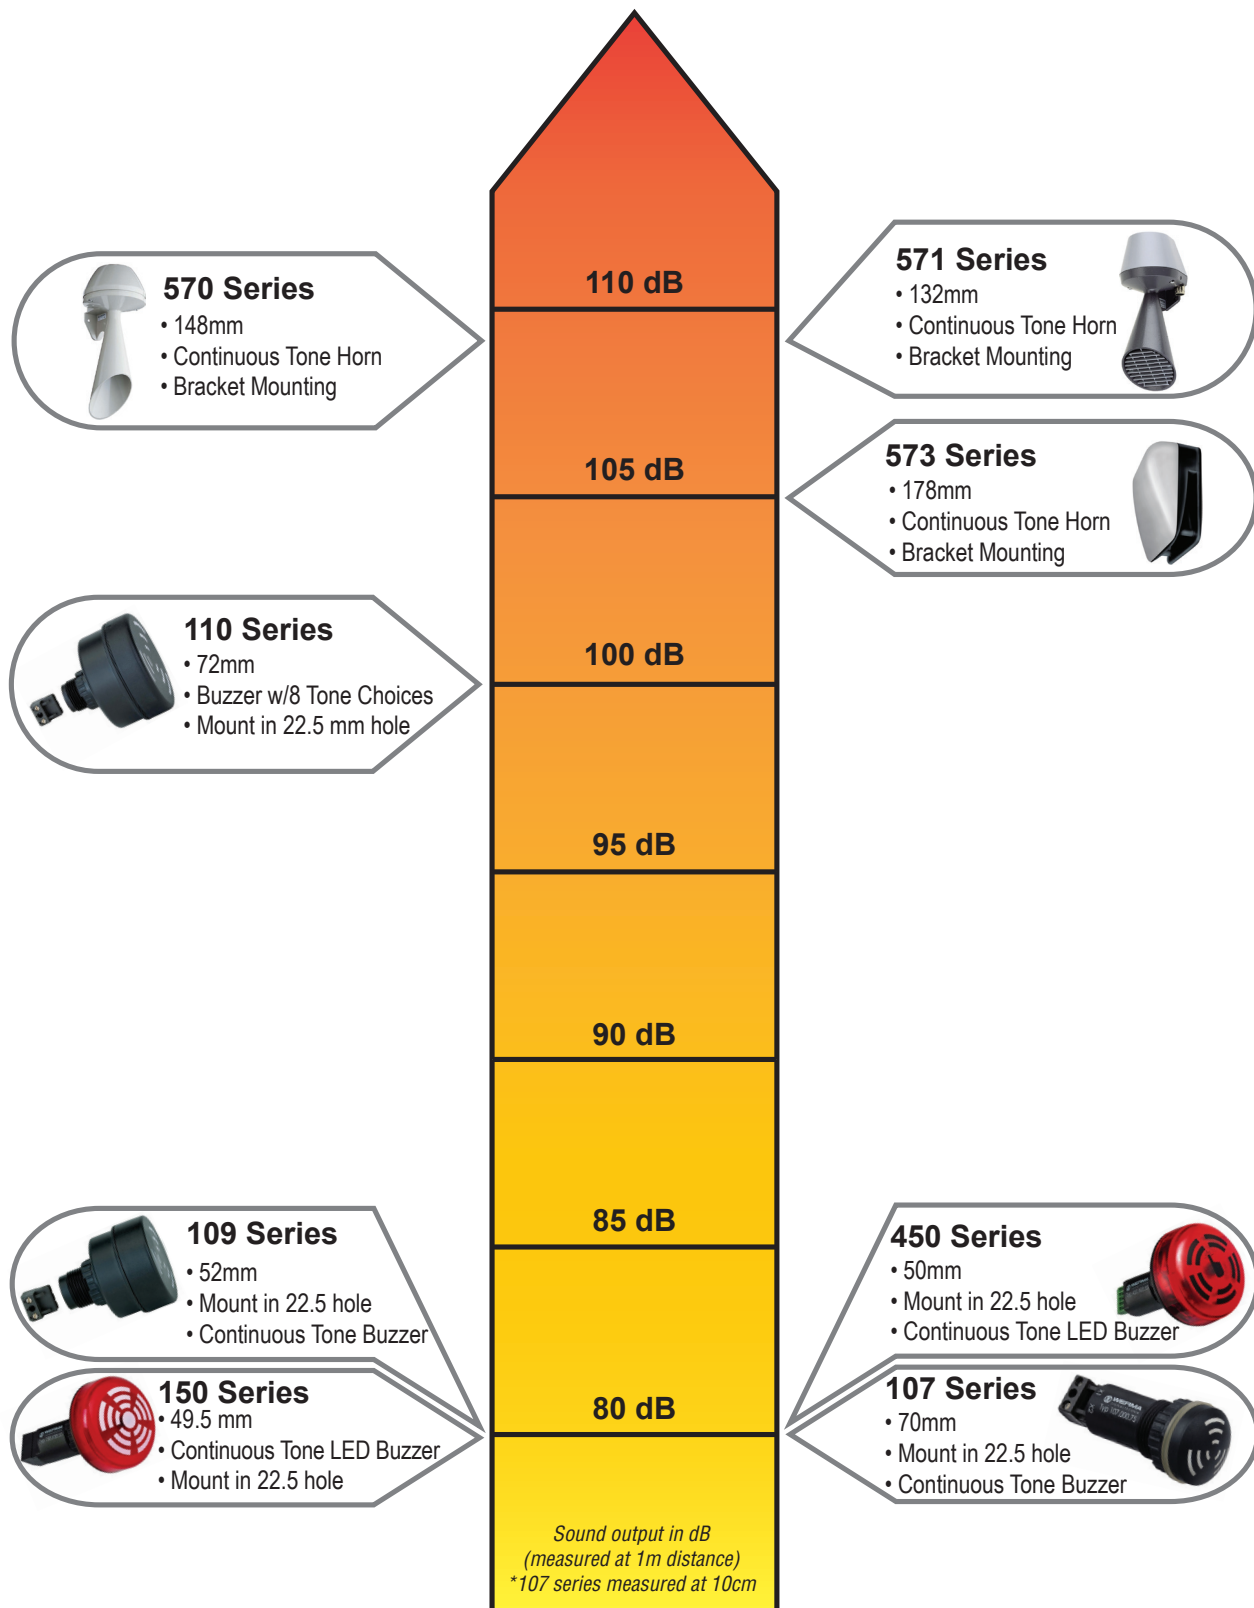





# Audible Signal Devices

## 22.5 mm Panel-mount Electrical Buzzers



### Features

- Mount in 22.5 mm hole
- Eighteen models available
- Continuous and pulse-tone models
- 80 to 100 decibels
- Buzzer without sound output holes
- Low current consumption
- IP65 protection rating



### 107 Series Buzzer Specifications

Part Number	10700060	10700070	10700075	10700077	10701060	10701070	10701075	10701077
<b>Price</b>	\$38.50	\$33.50	Retired	\$36.50	\$38.50	\$33.50	\$32.00	\$36.50
<b>Drawing Link</b>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>
<b>Description</b>	Buzzer							
<b>Voltage</b>	115–230 VAC	12/24 VAC/VDC	24 VAC/VDC	115 VAC/VDC	115–230 VAC	12/24 VAC/VDC	24 VAC/VDC	115 VAC/VDC
<b>Current Consumption</b>	12mA	8mA	≤ 8mA		12mA	8mA	≤ 8mA	
<b>Tone Frequency</b>	2.4 kHz							
<b>Maximum Volume</b>	80dB @ 10cm							
<b>Tone Type</b>	Continuous				Pulse		Pulse, approx.1Hz	
<b>Life Duration</b>	> 5000h							
<b>Operating Temperature</b>	-4 to 122°F [-20 to 50°C]							
<b>Protection</b>	IP65							
<b>Weight</b>	20g [0.70 oz]		30g [1.06 oz]		20g [0.70 oz]		30g [1.06 oz]	
<b>Housing Material</b>	Glass fiber reinforced polyamide							
<b>Connection</b>	Connector with max wire 1.5 mm <sup>2</sup> (16 AWG), 0.3 N torque							
<b>Agency Approvals</b>	cULus File E164155, CE							

### 109 Series Buzzer Specifications

Part Number	10900075	10900077	10901075	10901077
<b>Price</b>	\$69.00	\$78.00	\$69.00	\$78.00
<b>Drawing Link</b>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>
<b>Description</b>	Buzzer			
<b>Voltage</b>	24V AC/DC	115V AC/DC	24V AC/DC	115V AC/DC
<b>Current Consumption</b>	≤ 25mA			
<b>Tone Frequency</b>	2.1 kHz			
<b>Maximum Volume</b>	80dB @ 1m			
<b>Tone Type</b>	Continuous		Pulse, approx. 1Hz	
<b>Life Duration</b>	> 5000h			
<b>Operating Temperature</b>	-4 to 122°F [-20 to 50°C]			
<b>Protection</b>	IP65			
<b>Weight</b>	44g [1.55 oz]	47g [1.66 oz]	44g [1.55 oz]	47g [1.66 oz]
<b>Housing Material</b>	ABS(PC) Polycarbonate (black)			
<b>Connection</b>	Connector with max wire 1.5 mm <sup>2</sup> (16 AWG), 0.3 N torque			
<b>Agency Approvals</b>	cULus File E164155, CE			





# Audible Signal Devices

## 22.5 mm Panel-mount Electrical Buzzers

### Buzzer without sound output holes

- Mount in 22.5 mm hole
- 8 selectable tones
- Adjustable volume, 100 decibels maximum at one meter



110 Series Buzzer Specifications		
Part Number	11000067	11000075
Price	\$116.00	\$105.00
Drawing Link	<a href="#">PDF</a>	<a href="#">PDF</a>
Description	Buzzer Element with selectable tones	
Voltage	115VAC	24V AC/DC
Current Consumption	≤ 40mA	≤ 80mA
Tone Frequency	1.6 and 3.4 kHz	
Maximum Volume	100dB @ 1m	
Tone Type	Multi-tonal, 8 selectable tones	
Life Duration	> 5000h	
Operating Temperature	-4 to 122°F [-20 to 50°C]	
Protection	IP65	
Weight	79g [2.79 oz]	64g [2.26 oz]
Housing Material	ABS/(PC) Polycarbonate (black)	
Connection	Connector with max wire 1.5 mm2 (16 AWG), 0.3 N torque	
Agency Approvals	cULus File E164155, CE	

Note: Refer to insert for available tones.


### Buzzer with LED Indicator

- Mount in 22.5 mm hole
- LED permanent light indicator
- Continuous tone
- Simple connection with connector plug
- 80 decibels volume at one meter



150 Series Buzzer with LED Indicator Specifications				
Part Number	15010055	15010067	15030055	15030067
Price	\$82.00	\$89.00	\$82.00	\$89.00
Drawing Link	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>
Description	Buzzer element with LED indicator			
LED Indicator	Red		Yellow	
Voltage	24VDC	115VAC	24VDC	115VAC
Current Consumption	≤ 50mA	≤ 20mA	≤ 50mA	≤ 20mA
Tone Frequency	2.8 kHz			
Maximum Volume	80dB @ 1m			
Tone Type	Continuous			
Life Duration	Up to 50,000h			
Operating Temperature	-4 to 122°F [-20 to 50°C]			
Protection	IP65			
Weight	30g [1.06 oz]			
Housing Material	Cap: Polycarbonate. Base: ABS/(PC) Polycarbonate (black)			
Connection	Connector with max wire 1.5 mm² (16 AWG), 0.3 N torque			
Agency Approvals	cULus File E164155, CE			

## Wiring Diagram



Note: Buzzer will not sound without light energized.



# Audible Signal Devices

## 22.5 mm Panel-mount Electrical Buzzers with Acknowledgment Function

### Buzzer without sound output holes


- Mount in 22.5 mm hole
- LED permanent light with continuous tone
- 80 decibels volume at one meter
- Lightly press to silence the audible signal
- Potential-free output for transmission of the acknowledgment signal to the control unit
- Positive and negative logic



450 Series Buzzer Specifications		
Part Number	45010055	45030055
Price	\$164.00	\$164.00
Drawing Link	<a href="#">PDF</a>	<a href="#">PDF</a>
Description	Buzzer element with acknowledgment function	
LED Indicator Color	Red	Yellow
Voltage	24V /DC	
Current Consumption	≤ 0mA	
Tone Frequency	3kHz	
Maximum Volume	80dB @ 1m	
Max. Output (acknowledgment)	Solid State 30V, 100mA	
Tone Type	Continuous	
Life Duration	> 50,000h	
Operating Temperature	-4 to 122°F [-20 to 50°C]	
Protection	IP65	
Weight	40g [1.41 oz]	
Housing Material	Cap: Polycarbonate. Body: Black Polycarbonate	
Connection	Connector plug with screwable connection max. 0.5 mm <sup>2</sup> (20AWG)	
Agency Approvals	cULus file E164155, CE, RoHS	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Wiring Diagram

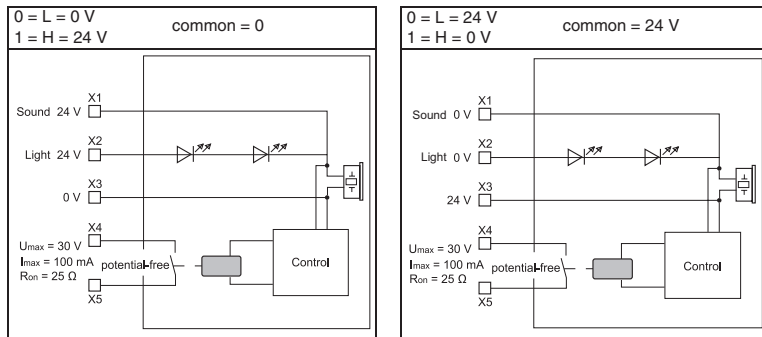

**1**

BEEP - BEEP - BEEP  
LIGHT  
LIGHT  
BEEP - BEEP - BEEP

An initial alarm is indicated by both an illuminated and audible signal.

**2**

BEEP - BEEP - BEEP  
LIGHT  
LIGHT  
BEEP - BEEP - BEEP

The audible signal can be silenced quickly by lightly pressing on the front of the indicator.

**3**

LIGHT  
LIGHT

An acknowledge signal is then transmitted via an electronic switch, and the alarm is now only indicated by the illuminated visual signal.



## Wall-mount Signal Horns

### Features

- Wall mounting
- Continuous tone
- 148mm diameter

570 Series Signal Horns Specifications		
<b>Part Number</b>	<b>57005255</b>	<b>57005267</b>
<b>Price</b>	\$135.00	\$113.00
<b>Drawing Link</b>	<a href="#">PDF</a>	<a href="#">PDF</a>
<b>Description</b>	Signal Horn	
<b>Voltage</b>	24VDC	115VAC
<b>Current Consumption</b>	350mA	200mA
<b>Tone Frequency</b>	150Hz	100Hz (supply frequency)
<b>Maximum Volume</b>	108dB @ 1m	
<b>Tone Type</b>	Continuous	
<b>Life Duration</b>	> 250h	
<b>Operating Temperature</b>	-20 to 60°C [-4 to 140°F]	
<b>Protection</b>	IP55	
<b>Weight</b>	880g [31.04 oz]	860g [30.34 oz]
<b>Housing Material</b>	ABS/PC	
<b>Connection</b>	Screwable con max. 2.5 mm <sup>2</sup> single wire, 18-14 AWG	
<b>Agency Approvals</b>	CE, RoHS	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.





# Audible Signal Devices

## Wall-mount Signal Horns

### Features

- Corrosion-resistant aluminum housing, salt water proof
- Wall mounting
- Continuous tone
- 132mm diameter



571 Series Signal Horns Specifications		
Part Number	<a href="#">57105255</a>	<a href="#">57105267</a>
Price	\$421.00	\$384.00
Drawing Link	<a href="#">PDF</a>	<a href="#">PDF</a>
Description	Signal Horn	
Voltage	24VDC	115VAC
Current Consumption	350mA	200mA
Tone Frequency	150Hz	100Hz (supply frequency)
Maximum Volume	108dB @ 1m	
Tone Type	Continuous	
Life Duration	> 250h	
Operating Temperature	-20 to 60°C [-4 to 140°F]	
Protection	IP55	
Weight	880g [31.04 oz]	860g [30.34 oz]
Housing Material	Aluminum	
Connection	Screwable con max. 2.5 mm <sup>2</sup> single wire, 18-14 AWG	
Agency Approvals	CE, RoHS	



To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Features

- Modern electro-mechanical design
- Wall mounting
- Continuous tone
- 178mm diameter



573 Series Signal Horns Specifications		
Part Number	<a href="#">57300055</a>	<a href="#">57300067</a>
Price	\$183.00	\$145.00
Drawing Link	<a href="#">PDF</a>	<a href="#">PDF</a>
Description	Signal Horn	
Voltage	24VDC	115VAC
Current Consumption	350mA	200mA
Tone Frequency	150Hz	100Hz (supply frequency)
Maximum Volume	105dB @ 1m	
Tone Type	Continuous	
Life Duration	> 250h	
Operating Temperature	-30 to 50°C [-22 to 122°F]	
Protection	IP65	
Weight	1200g [42.33 oz]	1150g [40.57 oz]
Housing Material	Polycarbonate/ABS-blend	
Connection	Screwable con max. 2.5 mm <sup>2</sup> single wire, 18-14 AWG	
Agency Approvals	CE, RoHS	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

## Audible Signal Devices

Patlite offers a wide range of audible signal devices for either installation panel or surface mount applications with a variety of decibel ranges and options. All options come with pre-configured digital audio tones and the ability to be field configured using an SD card.

- Up to 110db (signal horn)
- Temperature tolerant (typically -10°C or less to +50°C or more)
- Good environmental protection ratings when installed correctly
- Wide range of digital tones to choose from
- Optional SD card can be used to field configure tones
- Variety of models for both AC and DC applications
- Polycarbonate or plastic construction

## Audible Accessories

Accessories for Patlite audible signal devices:

- Replacement parts
- 2GB micro SD card with SD adapter





# PATLITE® Audible Alarm Buzzers

## Panel-mount Electronic Buzzers

### BM Series Buzzer Features

- Available in both AC and DC versions
- 30mm round mounting on 50mm square backing
- Two selectable alarm sounds
- Up to 90dB volume
- Meets IP30 standards
- Designed to operate in temperatures from -10 to 60°C [14 to 140°F]




**BM-202H**

### BM Series Buzzer Specifications

Part Number	BM-202H	BM-212H
Price	\$36.00	\$36.00
Drawing Link	<a href="#">PDF</a>	<a href="#">PDF</a>
Description	Buzzer	
Rated Voltage	24V AC/DC	120VAC
Operating Voltage Range	Rated voltage $\pm$ 10%	
Rated Power Consumption	0.4 W	2.5 W
Maximum Volume	85dB @ 1m	90dB @ 1m
Tone Type	Buzzer 1: Slow intermittent Buzzer 2: Fast intermittent	
Operating Temperature	-10 to 60°C [14 to 140°F]	
Operating Ambient Humidity	Less than 85% (no condensation)	
Mounting Location	Indoors	
Mounting Direction	Upright, sideways, upside-down	
Protection	IP30 (IEC 60529)	
Insulation Resistance	More than 1M $\Omega$ at 500VDC between terminals and chassis	
Withstand Voltage	500VAC applied for 1 minute between terminals and chassis	1500VAC applied for 1 minute between terminals and chassis
Weight	100g [3.5 oz]	
Housing Material	ABS Plastic	
Agency Approvals	EMC Directive (EN 55011, EN 610006-2) RoHS Directive (EN 50581) Conforms to CE requirements	-

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

## Wiring Diagram

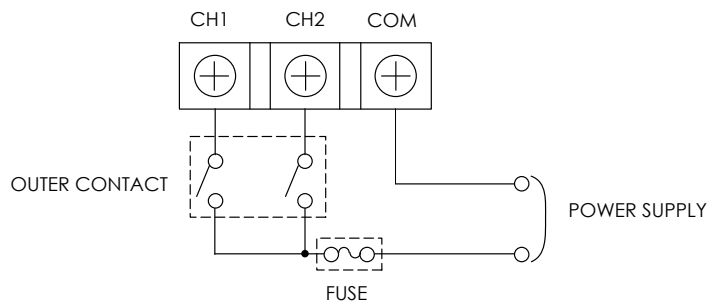



# Hazardous Area Audible Signal

## YA11 Series Panel or Surface Mount Alarms Overview

STAHL YA11 series signal alarms provide an audible warning, alert, or information. For example, in the event of equipment malfunctions or safety issues, or when systems are starting up. The YA11 series signal alarms are designed to provide an omni-directional audible signal and is intended for use in hazardous areas or the harshest environments and have hazardous area certifications for international use.

## Features

- Lightweight, corrosion resistant ABS and aluminum construction
- Low profile
- 100dB at 1-meter
- NEMA 4X, IP66 rating
- Meets UL, CUL, ATEX and IECEx approvals
- -40 to 70°C (-40 to 158°F) temperature range
- Stainless steel mounting and console sealing hardware included
- Prewired with a 3-meter (118 inches) cable for easy installation



**YA11-1-D-01-RN**

YA11 Series Alarms				
Part Number	<u>YA11-1-D-01-RN</u>	<u>YA11-1-D-02-RN</u>	<u>YA11-1-D-04-RN</u>	<u>YA11-1-D-11-RN</u>
Price	\$562.00	\$562.00	\$562.00	\$562.00
Drawing Link	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>	<a href="#">PDF</a>
Description	STAHL Alarm Buzzer: 100dB at 1m			
Rated Voltage	24VDC			
Operating Voltage Range	18 - 32 VDC			
Rated Power Consumption	70mA			
Maximum Volume	100dB at 1m			
Tone Type	Alternating two-tone		Alternating fast two-tone	Continuous
Tone Frequency	800Hz 1kHz	2.5 kHz 3.1 kHz	2.5 kHz 3.1 kHz	1kHz
Operating Temperature	-40 to 70°C [-40 to 158°F]			
Mounting Location	Hazardous location rated			
Mounting Direction	Any			
Protection	Panel or Surface Mount - IP66			
NEMA Rating	4X			
Weight	3.57 lb			
Housing Material	Aluminium/ABS plastic			
Housing Color	Red			
Cable Description	3m (118in) ÖLFLEX150 QUATTRO/18AWG 2x1mm <sup>2</sup>			
Agency Approvals	Standard UL 464, Edition 9, Revision date 2009-08-14 ISA 12.12.01-2010 - Nonincendive Electrical Equipment For Use In Class I and II, Division 2, and Class III, Divisions 1 and 2 Hazardous (Classified) Locations - Edition 1 - Approved 2011-01-28 Canadian Standard CAN/ULC-S525-07, Edition 3, dated February 2007 CSA C22.2 No. 213 - Nonincendive Electrical Equipment For Use In Class 1, Division 2 Hazardous Locations - (1987 Edition) - Edition 1 - Issue Date 1987-03-01			

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.  
Specifications continued on the following page



# Hazardous Area Audible Signal

## YA11 Series Panel or Surface Mount Alarms

### Specifications

<b>YA11 Series Alarms - Explosion Protection Specifications</b>				
<b>Part Number</b>	<b>YA11-1-D-01-RN</b>	<b>YA11-1-D-02-RN</b>	<b>YA11-1-D-04-RN</b>	<b>YA11-1-D-11-RN</b>
<b>Scope of Validity</b>	Canada, European Union (ATEX), IECEX, USA			
<b>Application range (zones)</b>	2, 22			
<b>IECEX gas certificate</b>	IECEX BAS 11.0058X			
<b>IECEX gas explosion protection</b>	Ex nA IIC T4 Gc			
<b>IECEX dust certificate</b>	IECEX BAS 11.0058X			
<b>IECEX dust explosion protection</b>	Ex tc IIIC T90°C Dc IP66			
<b>ATEX gas certificate</b>	Baseefa 10 ATEX 0252X			
<b>ATEX gas explosion protection</b>	II 3 G Ex nA IIC T4 Gc			
<b>ATEX dust certificate</b>	Baseefa 10 ATEX 0252X			
<b>ATEX dust explosion protection</b>	II 3 D Ex tc IIIC T90°C Dc IP66			
<b>USA gas certificate</b>	UL E161818			
<b>USA dust certificate</b>	UL E161818			
<b>NEC 500 gas explosion protection</b>	Class I, Div. 0			
<b>NEC 500 zones</b>	Class I, Zone 2			
<b>NEC 500_2 gas explosion protection</b>	Group A,B,C,D			
<b>CAN gas certificate</b>	UL E161818			
<b>Marking cULus</b>	Class I, Div. 2, Groups A,B,C,D Class I, Div. 2, Groups A,B,C,D			
<b>Certificates</b>	ATEX (BAS), Canada / USA (UL), IECEX (BAS)			

# PATLITE® Audible Signal Horns

## Electronic Sound Signal Horns

### EHS Series Horns Features

- Compact signal horn
- Four playback modes
- Can be used with either PNP or NPN inputs
- Meets IP65 standards
- Designed to operate in temperatures from -20 to 50°C [-4 to 122°F]
- Polycarbonate construction
- 32 standard sounds
- Optional SD card for field configuration (sold separately)



**EHS-M1TE**



**V21100522-F1**




**V13100076-F1**

EHS Series Signal Horns Specifications		
Part Number	EHS-M1TE	EHS-M2TE
Price	\$245.00	\$245.00
Drawing Link	<a href="#">PDF</a>	<a href="#">PDF</a>
Description	Signal Horn	
Rated Voltage	12-24VDC	100-240VAC (50/60Hz)
Operating Voltage	10.8-35 VDC	90-264VAC (50/60Hz)
Current Consumption	450mA	140mA
Power Consumption	5.0-7.6 W	6.9-7.3 W
Inrush Current	4-12.5 A or less	6-23 A or less
Maximum Volume	110dB @ 1m	
Tone Type	Electronic (32 tones available)	
Operating Temperature	-20 to 50°C [-4 to 122°F]	
Operating Ambient Humidity	Less than 85% (no condensation)	
Mounting Location	Indoors/outdoors	
Mounting Direction	Upright, sideways, upside-down	
Protection	IP65	
Insulation Resistance	More than 1MΩ at 500VDC between terminals and chassis	
Withstand Voltage	500VAC applied for 1 minute between terminals and chassis	1500VAC applied for 1 minute between terminals and chassis
Vibration Resistance	45.0 m/s2 (IEC 60068-2-6:2007), upright	
Weight	1.25 kg [2.8 lbs]	
Housing Material	Polycarbonate	
Memory Card	SD card (SDV-2GP recommended, sold separately), FAT16 or 32 format	
Agency Approvals	EMC Directive (EN 61000-6-4, EN 6100-6-2)	
	RoHS Directive (EN 50581) UL 464, CSA-C22.2 No. 205-M1983 FCC Part 15 Subpart B Class A KC (KN22, KN24) UL Listed (File S24210)	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

EHS Series Accessories		
Part Number	Price	Description
<a href="#">V21100522-F1</a>	\$33.00	Replacement cover, for EHS series signal horns
<a href="#">V13100076-F1</a>	\$30.50	Replacement 16 inch cable, for EHS series signal horns
<a href="#">SDV-2GP</a>	\$17.50	2GB micro SD card with SD adapter

### WIRING DIAGRAM

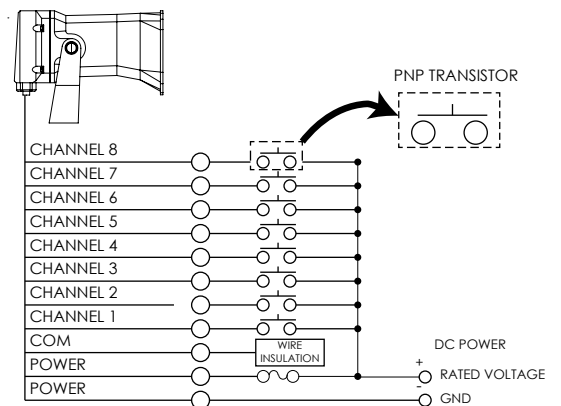

# PATLITE® Audible Electronic Alarms

## BD Series Panel- or Surface-mount Electronic Alarms

### Features

- 80mm square alarm
- 32 different alarm tones available
- Up to 90dB volume
- Meets IP54 standards
- Designed to operate in temperatures from -20 to 55°C [-4 to 131°F]
- ABS plastic construction
- 32 standard sounds
- Optional SD card for field configuration (sold separately)




BD-24AE-J

BD Series Accessories		
Part Number	Price	Description
<a href="#">SDV-2GP</a>	\$17.50	2GB micro SD card with SD adapter

BD Series Alarm Specifications		
Part Number	BD-24AE-J	BD-24AE-K
Price	\$120.00	\$120.00
Drawing Link	<a href="#">PDF</a>	<a href="#">PDF</a>
Description	Alarm	
Rated Voltage	12-24VDC	
Operating Voltage Range	10.8-26.4 VDC	
Rated Power Consumption	Standby	0.5 W
	Maximum	4.0 W
Maximum Volume	90dB @ 1m	
Tone Type	Electronic (32 tones available)	
Operating Temperature	-20 to 55°C [-4 to 131°F]	
Operating Ambient Humidity	Less than 85% (no condensation)	
Mounting Location	Indoors	
Mounting Direction	Upright, sideways, inverted	
Protection	IP54	
Insulation Resistance	More than 1MΩ at 500VDC between terminals and chassis	
Withstand Voltage	500VAC applied for 1 minute between terminals and chassis	
Vibration Resistance	19.6 m/s <sup>2</sup> (IEC 60529)	
Weight	160g [5.6 oz]	
Housing Material	ABS plastic	
Housing Color	Light gray	Dark gray
Agency Approvals	EMC Directive (EN 61000-6-4, EN 61000-6-2) RoHS Directive (EN 50581) FCC Part 15, Subpart B Class A UL 464, CSA-C22.2 No. 205-M1983 UL Recognized (File S24210) Conforms to CE requirements	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Wiring Diagram

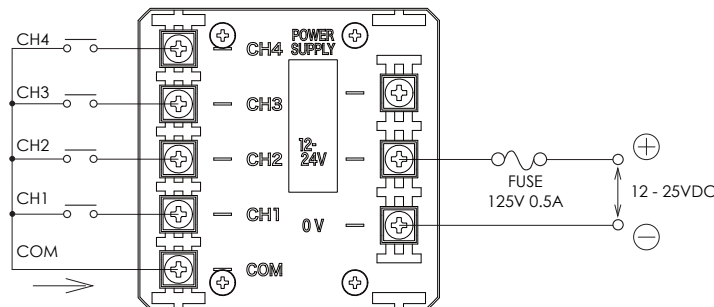

# PATLITE® Audible Electronic Alarms

## BSV Series Panel- or Surface-mount Electronic Alarms

### Features

- Compact alarm that plays 15 prerecorded alarms
- Up to 90dB volume
- Meets IP54 standards when panel mounted
- Works with PNP inputs
- Designed to work in temperatures from -10 to 50°C [14 to 122°F]
- Polycarbonate construction
- 15 standard sounds
- Optional SD card for field configuration (sold separately)



**BSV-24P-D**

BSV Series Accessories		
Part Number	Price	Description
<b>SDV-2GP</b>	\$17.50	2GB micro SD card with SD adapter

BSV Series Alarm Specifications		
Part Number	<i>BSV-24P-D</i>	<i>BSV-24P-W</i>
<b>Price</b>	\$137.00	\$137.00
<b>Drawing Link</b>	<a href="#">PDF</a>	<a href="#">PDF</a>
<b>Description</b>	Alarm	
<b>Rated Voltage</b>	12-24VDC	
<b>Operating Voltage Range</b>	10.8-26.4 VDC	
<b>Rated Power Consumption</b>	3.5 W	
<b>Maximum Volume</b>	85dB @ 1m	
<b>Tone Type</b>	Electronic (15 tones available)	
<b>Operating Temperature</b>	-10 to 50°C [14 to 122°F]	
<b>Operating Ambient Humidity</b>	Less than 85% (no condensation)	
<b>Mounting Location</b>	Panel mount: Indoor/outdoor Wall mount: Indoors	
<b>Mounting Direction</b>	Upright, sideways, inverted	
<b>Protection</b>	Panel mount: IP54 (upright mounting direction only) Wall mount: IP20	
<b>Insulation Resistance</b>	More than 1MΩ at 500VDC between terminals and chassis	
<b>Withstand Voltage</b>	500VAC applied for 1 minute between terminals and chassis	
<b>Vibration Resistance</b>	70.0 m/s <sup>2</sup> (in the x, y, and z directions for 2 hours each at 30Hz)	
<b>Weight</b>	100 [3.5 oz]	
<b>Housing Material</b>	Polycarbonate	
<b>Housing Color</b>	Dark gray	Off-white
<b>Agency Approvals</b>	EMC Directive (EN 61000-6-4, EN 61000-6-2) RoHS Directive (EN 50581) FCC Part 15, Subpart B Class A UL Recognized (File S24210)	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Wiring Diagram

