C-more Micro 3-inch EA1 PLC Connections

Cabling requirements

The following cables can be used when connecting the *C-more* 3-inch Micro panel's built-in RJ12 serial port (Port1) with the Productivity Series, Do-more/BRX*, CLICK, DL05, DL06, DL105, DL205, D3-350 and DL405 CPUs.

- <u>DV-1000CBL</u> connects to Productivity Series, Do-more/BRX* CLICK, DL05, DL06, DL105, DL205, D3-350 and D4-450 phone jack.
- <u>D4-1000CBL</u> connects to all DL405 CPU 15-pin ports.


A maximum cable length of 10 feet between the **C-more** Micro panel and the PLC is recommended when powering the panel from the PLC.

See the Communication Protocols & Cabling Charts in this catalog section for details on the selection of various controllers, protocols, and connectivity.


Drivers for your Controller

- AutomationDirect Productivity Series
- AutomationDirect Do-more/BRX*
- AutomationDirect CLICK (Modbus)
- DirectLOGIC K-sequence, DirectLOGIC DirectNET, DirectLOGIC Modbus (Koyo Addressing)
- Modbus RTU
- Allen Bradley DF1 Full Duplex, Allen Bradley DF1 Half Duplex, Allen Bradley PLC5 DF1, AB DH485
- Omron Host Link (C200 Adapter, C500)
 Omron FINS serial (CJ1, CS1)
- GE SNPX (90/30, 90/70, Micro 90, VersaMax Micro)
- Mitsubishi Melsec FX
- Siemens PPI
- Entivity Modbus RTU
- AutomationDirect GS Drives
- AutomationDirect SOLO Temperature Controllers
- Mitsubishi Q/QnA
 - * BX-P-SER2-RJ12 is required


C-more 3-inch Micro Port 1 to CLICK PLC Port 2

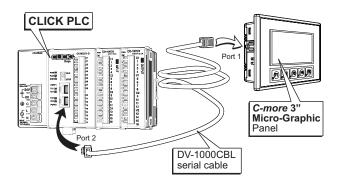

C-more 3-inch Micro Port 1 to DL06 PLC Port 1

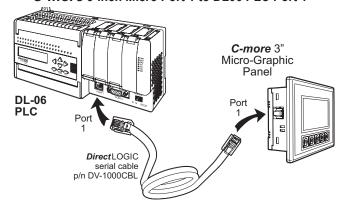

C-more 3-inch Micro Port 1 to DL205 PLC Port 1

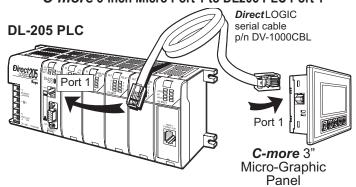

C-more Micro 3-inch EA1 Communication Protocols & Cabling Chart

		Controller Com	patibility & Connection Cha	rt
PLC			C-more 3-inch Micro Panel.	
Family	СРИ	Port & Type	Panel to PLC Cabling Components Required for Specific Port and Protocol being used. PLC Port Powered Powered with 5 VDC from the connected PLC's comm. port.	
			Using panel's RJ12 port 1	
			Protocol(s) Supported	Components & Network Type
	all versions	Port 1 RJ12 - 6 pin	AutomationDirect Modbus (CLICK)	DV-1000CBL
CLICK		Port 2 RJ12 - 6 pin		RS-232
	Analog CPU's	Port 3 Terminal block - 3-pin		N/A
	all versions	RS-232 RJ12 - 6 pin	AutomationDirect Productivity Serial	DV-1000CBL RS-232
Productivity Series		RS-485 Port Term block 3-pin		N/A
Do-more	all versions	Port 2 RJ12 - 6 pin	AutomationDirect Do-more Serial	DV-1000CBL RS-232
BRX	all versions	RS-232 POM module BX-P-SER2-RJ12	AutomationDirect Do-more Serial	DV-1000CBL RS-232
		RS-485 Port Term block 3-pin		N/A
DirectLOGIC DL05	all versions	Port 1 RJ12 - 6 pin	K-sequence, <i>Direct</i> NET, Modbus RTU	DV-1000CBL RS-232
(see D0-DCM under DL06)		Port 2 RJ12 - 6 pin		
DirectLOGIC DL06	all versions	Port 1 RJ12 - 6 pin Port 2 DB15HD (female)	K-sequence, Direct NET, Modbus RTU	DV-1000CBL RS-232 DV-1000CBL + FA-15HD RS-232
	D0-DCM	Port 1 RJ12 - 6 pin Port 2 DB15HD (female)	K-sequence, Direct NET, Modbus RTU	DV-1000CBL RS-232 DV-1000CBL + FA-15HD RS-232
DirectLOGIC DL105	all versions	Port 1 RJ12 - 6 pin	K-sequence	DV-1000CBL RS-232

Note: See the *C-more* Micro Hardware User Manual, Chapter 6: PLC Communications, for wiring diagrams that the user can use to construct their own cables. Available for download at www.automationdirect.com. PLC Compatibility & Connection Chart continued on next page.

www.automationdirect.com Operator Interface tCMM-12

C-more Micro 3-inch EA1 Communication Protocols & Cabling Chart (cont'd)

Controller Compatibility & Connection Chart					
PLC			C-more 3-inch Micro Panel.		
Family	СРИ	Port & Type	Panel to PLC Cabling Components Require PLC Port Powered with 5 VDC from the		
			Using panel's RJ12 port 1 Protocol(s) Components &		
			Supported	Network Type	
	D2-230	Port 1 RJ12 - 6 pin	K-sequence	DV-1000CBL RS-232	
	D2-240	Port 1 RJ12 - 6 pin	K-sequence	DV-1000CBL	
	D2-240	Port 2 RJ12 - 6 pin	K-sequence, <i>Direct</i> NET	R\$-232	
DirectLOGIC DL205	D2-250-1	Port 1 RJ12 - 6 pin Port 2 DB15HD (female)	K-sequence, <i>Direct</i> NET, Modbus RTU	DV-1000CBL RS-232 DV-1000CBL + FA-15HD RS-232	
	D2-260	Port 1 RJ12 - 6 pin Port 2 DB15HD (female)	K-sequence, Direct NET, Modbus RTU	DV-1000CBL RS-232 DV-1000CBL + FA-15HD RS-232	
	D2-DCM	Port 1 DB 25 pin (female)	K-sequence, <i>Direct</i> NET, Modbus RTU	See Note RS-232	
	WINPLC	Port 1 RJ12 - 6 pin	Modbus RTU	DV-1000CBL RS-232	
	D3-330 or D3-340	D3-232-DCU DB 25 pin (female)	N/A		
		D3-422-DCU DB 25 pin (female)	N/A		
	D3-340	Port 1 RJ11 - 4 pin	N/A		
DirectLOGIC DL305		Port 2 RJ11 - 4 pin	N/A		
	D0 050	Port 1 RJ12 - 6 pin	K-sequence, <i>Direct</i> NET	DV-1000CBL RS-232	
	D3-350	Port 2 DB 25 pin (female)	N/A		
	D3-DCM D3-350 only	Port 1 DB 25 pin (female)	K-sequence, Direct NET, Modbus RTU	See Note RS-232	

Note: See the C-more Micro Hardware User Manual, Chapter 6: PLC Communications, for wiring diagrams that the user can use to construct their own cables. Available for download at www.automationdirect.com. PLC Compatibility & Connection Chart continued on next page.

www.automationdirect.com Operator Interface tCMM-13

C-more Micro 3-inch EA1 Communication Protocols & Cabling Chart (cont'd)

Controller Compatibility & Connection Chart					
PLC		C-more 3-inch Micro Panel.			
Family	CPU	Port & Type	Panel to PLC Cabling Components Required for Specific Port and Protocol being used. PLC Port Powered Powered with 5 VDC from the connected PLC's comm. port.		
			Using panel's R. Protocol(s) Supported	J12 port 1 Components & Network Type	
	D4-430	Port 0 DB 15 pin (female)	K-sequence	D4-1000CBL or DV-1000CBL & FA-CABKIT RS-232	
		Port 1 DB 25 pin (female)	N/A		
	D4-440	Port 0 DB 15 pin (female)	K-sequence	D4-1000CBL or DV-1000CBL & FA-CABKIT RS-232	
Directl OGIC		Port 1 DB 25 pin (female)	N/A		
DirectLOGIC DL405	D4-450 / D4-454	Port 0 DB 15 pin (female)	K-sequence	D4-1000CBL or DV-1000CBL & FA-CABKIT RS-232	
		Port 1 DB 25 pin (female)	N/A		
		Port 2 RJ12 - 6 pin Port 3 DB 25 pin (female)	K-sequence, DirectNET N/A	DV-1000CBL RS-232	
	D4-DCM	Port 1 DB 25 pin (female)	K-sequence, <i>Direct</i> NET, Modbus RTU	See Note RS-232	
SOLO	N/A	Data +/- terminals	N/A		
GS Drives	N/A	RS-485 Interface	N/A		

Note: See the *C-more* Micro Hardware User Manual, Chapter 6: PLC Communications, for wiring diagrams that the user can use to construct their own cables. Available for download at www.automationdirect.com. PLC Compatibility & Connection Chart continued on next page.

www.automationdirect.com **Operator Interface**

tCMM-14

C-more Micro 3-inch EA1 Communication Protocols & Cabling Chart (cont'd)

		Juliuliel Gull	patibility & Connection Cha		
	PLC		C-more 3-inch Micro Panel.		
Family	CPU	Port & Type	Panel to PLC Cabling Components Required for Specific Port and Protocol being used. PLC Port Powered Powered with 5 VDC from the connected PLC's comm. port. Using panel's RJ12 port 1		
			Protocol(s) Supported	Components & Network Type	
Allen-Bradley	1000, 1100,	8-pin mini-din port			
MicroLogix	1200, 1400, 1500	RJ45 8-pin phone plug			
Allen-Bradley	5/03, 5/04, 5/05	9-pin D-sub port			
SLC500	5/01, 5/02, 5/03	RJ45 8-pin phone plug			
Allen-Bradley ControlLogix	all	9-pin D-sub port			
Allen-Bradley CompactLogix	all	9-pin D-sub port			
Allen-Bradley FlexLogix	all	9-pin D-sub port			
Allen-Bradley PLC5	all	25-pin D-sub port RJ45 8-pin			
		phone plug 15-pin			
	90/30	D-sub port RJ45			
GE	Micro 90, VersaMax Micro	Port 1 15-pin			
		D-sub port Port 2	1	N/A	
	Melsec FX Series	25-pin D-sub port			
Mitsubishi		8-pin mini-din port			
	Q / QnA	9-pin D-sub port			
		6-pin mini-din port			
	C200 (Adapter), C500	25-pin D-sub port			
Omron	CJ1, CS1, CQM1, CPM1, CPM2, C200	9-pin D-sub port			
Modicon	984 CPU, Quantum 113 CPU, AEG Modicon Micro Series 110 CPU	varies			
Siemens	S7-200 CPU	9-pin D-sub port 0 or 1			

Note: See the C-more Micro Hardware User Manual, Chapter 6: PLC Communications, for wiring diagrams that the user can use to construct their own cables. Available for download at www.automationdirect.com. Available cables with descriptions shown on the next page.

www.automationdirect.com Operator Interface tCMM-15

C-more Micro 3-inch EA1 Communication Cables and Cable Kits

Cable Description	Cable Part Number	Price
Cables for direct connect to panel's serial Port1 (Panel powered from PLC's serial port.)		
AutomationDirect communication cable, 6-pin RJ12 to 6-pin RJ12, 2m/6.6ft cable length. For use with DV-1000 or C-more Micro panels and AutomationDirect PLCs with an RJ12 port.	<u>DV-1000CBL</u>	\$23.00
AutomationDirect communication cable, 6-pin RJ12 to 15-pin male D-sub, shielded, 2m/6.6ft cable length. For use with DV-1000 or <i>C-more</i> Micro panels and any DL405 CPU.	<u>D4-1000CBL</u>	\$32.50
DirectLOGIC DL06 connector, 15-pin D-sub HD15 male to RJ12 female. For use with DL06 CPUs and DL205 D2-250, D2-250-1, D2-260 and D2-262 CPUs.	<u>FA-15HD</u>	\$21.00
Direct LOGIC universal cable kit, for use with all DirectLOGIC PLCs with RS-232 ports.	FA-CABKIT	\$71.00

