



Cutler-Hammer

# Enhanced 50 Series Through-beam Photoelectric Sensors

**1151E-6504****1251E-6504**

- Long sensing distances
- Fiberglass-reinforced plastic housing
- Field of view: 2.4°
- Cable wires or mini/micro connector termination
- NPN/PNP, Solid-State Relay, or SPDT EM Relay outputs
- IP67 rated

**1151E-6517****1251E-6517**

Note: Cutler-Hammer parts available for sale to North America locations only.

## Enhanced 50 Series Through-beam Photoelectric Sensors Selection Chart

Part Number	Price	Voltage Range	Sensing Range	Optimum Range	Sensing Beam	Through-Beam Component	Output Type	Connection Type	Cable Part Number				
<a href="#">1151E-6517</a>	\$125.00	10 - 40 VDC	500ft [152 m]	0.1 to 250ft [0.03 to 77 m]	Infrared	Source/Emitter	N/A	6-foot cable (300V)	pre-wired 6ft [1.8 m]				
<a href="#">1251E-6517</a>	\$112.00					Detector/Receiver	NPN/PNP 250mA						
<a href="#">1151E-6547</a>	\$125.00					Source/Emitter	N/A	4-pin Euro (Micro) DC connector	<a href="#">CSDS4A4CY2202</a> <a href="#">CSDS4A4CY2205</a>				
<a href="#">1251E-6547</a>	\$112.00					Detector/Receiver	NPN/PNP 250mA						
<a href="#">1151E-6513</a>	\$125.00	12 - 240 VDC 24 - 240 VAC				500ft [152 m]	0.1 to 250ft [0.03 to 77 m]	Infrared	Source/Emitter	N/A	6-foot cable (300V)	pre-wired 6ft [1.8 m]	
<a href="#">1251E-6513</a>	\$124.00								Detector/Receiver	Solid-state relay 300mA @ 240 VAC/VDC			
<a href="#">1151E-6543</a>	\$125.00								Source/Emitter	N/A	4-pin Micro AC connector	<a href="#">CSAS4F4CY2202</a> <a href="#">CSAS4F4CY2205</a>	
<a href="#">1251E-6543</a>	\$124.00								Detector/Receiver	Solid-state relay 300mA @ 240 VAC/VDC			
<a href="#">1151E-6504</a>	\$125.00								Source/Emitter	N/A	4-pin Mini connector	<a href="#">CSMS4A4CY1602</a> <a href="#">CSMS4A4CY1606</a>	
<a href="#">1251E-6503</a>	\$125.00								Detector/Receiver	Solid-state relay 300mA @ 240 VAC/VDC			
<a href="#">1251E-6504</a>	\$121.00									Detector/Receiver	SPDT EM relay 3A @ 120VAC	5-pin Mini connector	<a href="#">CSMS5A5CY1602</a> <a href="#">CSMS5A5CY1606</a>


Note: Purchase one source and one detector for a complete set.

Operating Voltage	Models	Cable Models	Mini-Connector Models (Face View Male Shown)	Micro and Euro (Micro) Connector Models (Face View Male Shown)
10 - 40V DC	Thru-Beam Source/Emitter	BR (+) BK Test BU (-)	Test ① ④ ② ③	② ① ③ ④ Test
	Thru-Beam Detector/Receiver	BR (+) VH Load BK Load BU (-)	PNP Load ① ④ ② ③ Load NPN Load ① ④ ② ③ Load	NPN Load ① ④ ② ③ PNP Load ① ④ ② ③
12 - 240V DC or 24 - 240V AC Solid-State Relay	Thru-Beam Source/Emitter	BR L1 (+) BU L2 (-)	L2 (-) ① ④ ② ③ L1 (+)	③ ② ④ ① L2 (-) L1 (+)
	Thru-Beam Detector/Receiver	BR L1 (+) VH Isolated AO/DC Output BK Isolated AO/DC Output BU L2 (-)	Isolated AO/DC Output Out ① ④ L2 (-) ② ③ L1 (+)	Isolated AO/DC Output Out ③ ② Out ④ ① L2 (-) L1 (+)
12 - 240V DC or 24 - 240V AC SPDT EM Relay	Thru-Beam Source/Emitter	BR L1 (+) BU L2 (-)	L2 (-) ① ④ ② ③ L1 (+)	③ ② ④ ① L2 (-) L1 (+)
	Thru-Beam Detector/Receiver	BR L1 (+) BK Load N.Q. Out CR COM VH Load N.Q. Out BU L2 (-)	N.Q. Out Load L2 (-) ① ⑤ ② ④ L1 (+) COM ③ ⑥	L2 (-) ② ⑤ ③ ④ N.Q. Out COM ① ⑥


① Connect load to appropriate output for either sinking or sourcing operation.

② Connecting the test input to 0 VDC allows you to switch the light source off for troubleshooting while leaving the sensor under power.

### Characteristic curve chart

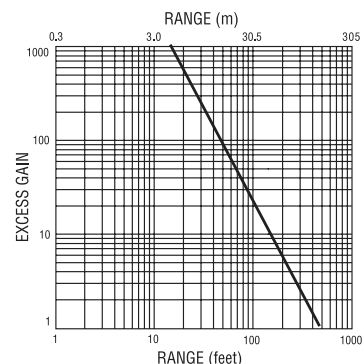

### Spot dimension chart

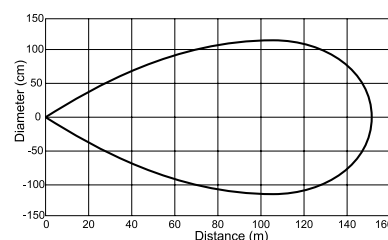



Cutler-Hammer

# Enhanced 50 Series Photoelectric Sensors Selection Guide

## Overview

The Enhanced 50 family of high performance photoelectric sensors offers outstanding features, flexibility and durability at an incredible price. Choose from a wide selection of Through-beam, Polarized Reflex, Diffuse and even Clear Object models all designed in a rugged, industry standard, rectangular package. Each model comes with a variety of input options for maximum flexibility across many voltage ratings.

Cabling choices include built-in mini-connector, micro-connector, pigtail micro-connector or a 6 ft. integrated cable. Other convenient features included are Dark-on/Light-on selectability and Gain adjustment, available on all models. Use the Selection Guide below to find the sensor model that best suits your requirements.



### Enhanced 50 Photoelectric Sensors Specifications by Model Type

Specifications	Through-Beam	Diffuse	Polarized Reflex	Clear Object Detector
<b>Voltage Range</b>	10 - 40 VDC 12 - 240 VDC 24 - 240 VAC	10 - 40 VDC 12 - 240 VDC 24 - 240 VAC	10 - 40 VDC 12 - 240 VDC 24 - 240 VAC	10 - 40 VDC 12 - 240 VDC 24 - 240 VAC
<b>Sensing Range</b>	500ft [152m]	10ft [3m]	16ft [4.9 m]	45in [1.2 m]
<b>Optimum Power</b>	0.1 to 250ft [0.03 to 77m]	1 to 60in [25 to 1520mm]	0.5 to 8ft [0.2 to 2.5 m]	1 to 24in [25 to 610mm]
<b>Sensing Beam</b>	Infrared	Infrared	Visible Red	Visible Red
<b>Output Types</b>	NPN/PNP 250mA, Solid-state relay 300mA @ 240 VAC/VDC, SPDT EM relay 3A @ 120VAC	NPN/PNP 250mA, Solid-state relay 300mA @ 240 VAC/VDC, SPDT EM relay 3A @ 120VAC	NPN/PNP 250mA, Solid-state relay 300mA @ 240 VAC/VDC, SPDT EM relay 3A @ 120VAC	NPN/PNP 250mA, Solid-state relay 300mA @ 240 VAC/VDC, SPDT EM relay 3A @ 120VAC

### Enhanced 50 Photoelectric Sensors Specifications by Input Type

Enhanced 50 Photoelectric Sensors Specifications by Input Type			
Specifications	AC/DC EM Relay Models	AC/DC Solid-State Relay Models	DC Only Models
Input Voltage	12 – 240 VDC 24 – 240 VAC	12 – 240 VDC 24 – 240 VAC	10 – 40 VDC
Light/Dark Operation	Switch selectable		
Operating Temperature	-13 to 131°F [-25 to 55°C]		
Humidity	95% relative humidity, non-condensing		
Case Material	Fiberglass reinforced plastic		
Lens Material	Acrylic		
Vibration	IEC 60947-5-2 part 7.4.2		
Shock	IEC 60947-5-2 part 7.4.1		
Protection	Output short circuit and overcurrent protection, reverse polarity protection		
Enclosure Ratings	IP67		
Agency Approvals	IEC IP67, cCSAus, UL508 (CSA File 224447)		
Output Load	3A @ 120VAC 3A @ 28VAC 3A @ 240VAC	300mA @ 240 VAC/VDC	250mA
Response Time	15ms	2ms	
No Load Current Draw	<30 mA		
Leakage Current (max.)	—	1mA @ 240VAC	<10μA
Indicator LEDs	Through-Beam Source.....All Others: Red: Power.....Green: Output .....Yellow: Power .....Red: Alignment		



Cutler-Hammer


# Enhanced 50 Series Photoelectric Sensors

## Application Guide

The Enhanced 50 Series Photoelectric Sensors are a great fit for applications such as material handling, packaging, wrapping and sortation. This family of sensors, with its four basic models (Through-beam, Polarized Reflex, Diffuse and Clear Object), meets the needs for almost any sensing requirement, including harsh environments with excessive dust or high temperature. Follow the application guide below to choose the best sensor model for your application.


### Through-Beam

- Most accurate
- Longest sensing range
- Most reliable
- Must be installed in two points on system: emitter and receiver
- More costly

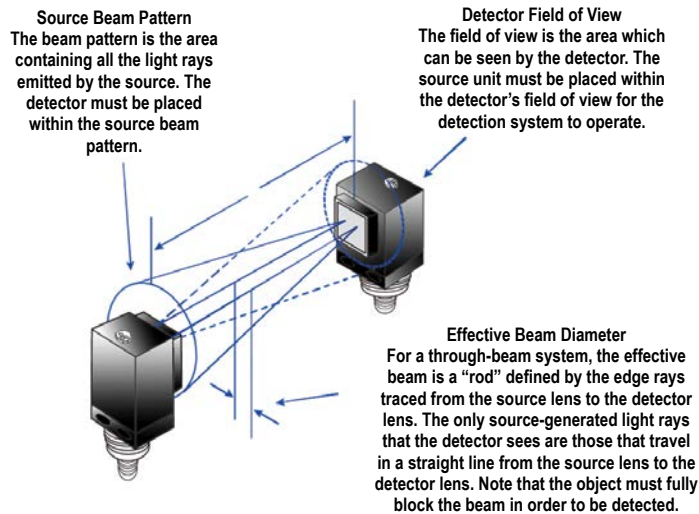


### Diffuse

- Lower cost
- Install at one point
- Less accurate than Through-Beam or Polarized Reflex
- More setup time involved

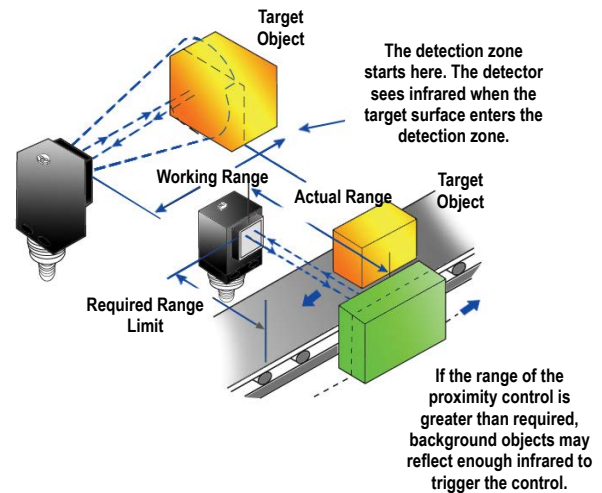


### Polarized Reflex

- Lower cost than Through-Beam
- Longer sensing range than Diffuse
- Very reliable
- Must be installed in two points on system: sensor and reflector

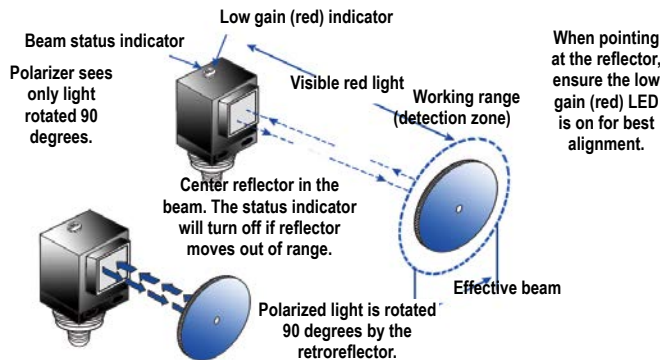

### Clear Object Detector

- Most reliable for sensing transparent objects
- Must be installed in two points on system: sensor and reflector.
- Short sensing distance: 45 inches max.

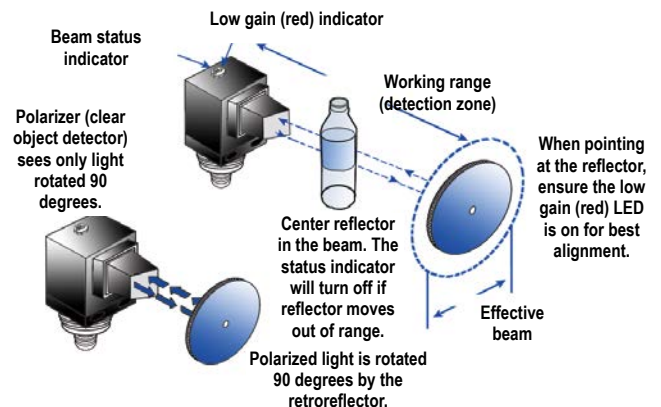





Cutler-Hammer


# Enhanced 50 Series Photoelectric Sensors Dimensions

## Sensor Dimensions

inches (mm)

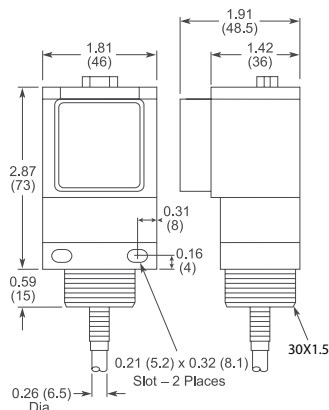
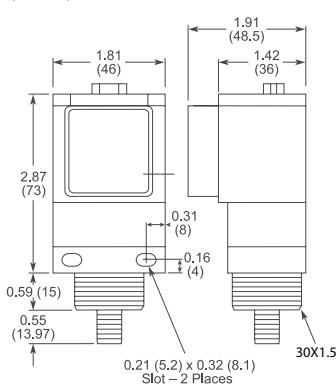
Cable and Pigtail Connector\*  
VersionAC/DC Micro or Euro  
(Micro) Connector Versions

Mini Connector Versions



\* Pigtail length: 7.5" nominal

Top View

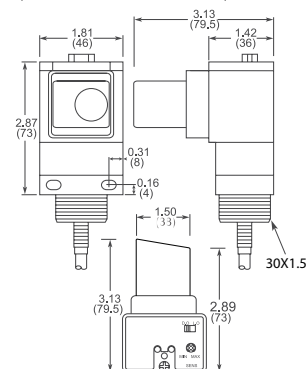
Clear Object Versions  
(Cable Version Shown)

## Connector Cables Dimensions


(in/mm)

### Micro Style Connector Cables


#### M12 x 1 (DC) connector cable

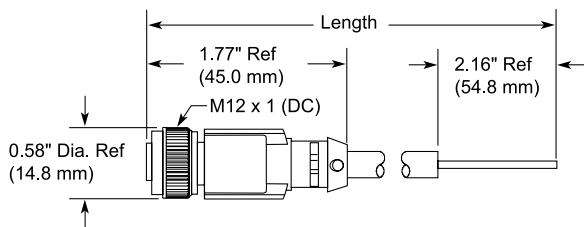

#### 1/2" - 20 UNF-2B (AC) connector cable

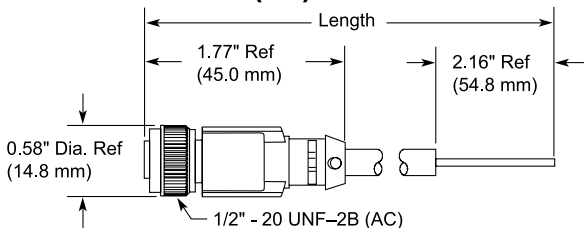

### Mini Style Connector Cables

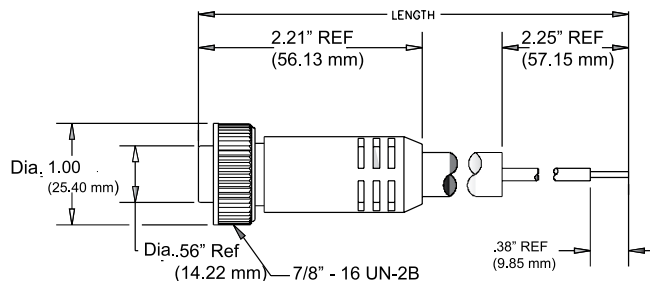

# DFT Series Fiber Photoelectric Amplifiers



## Compact Rectangular Plastic DIN rail Mount with Teach Function - DC

- DIN rail mounting
- Bargraph signal-strength indicator
- NPN or PNP, Light-on/Dark-on selectable outputs
- Red LED with visible spot
- IP64 rated





DFT Series Fiber Photoelectric Amplifier Selection Chart							
Part Number	Price	Sensing Range	Output State	Logic	Connection	Wiring	Dimensions
<a href="#">DFT-AN-1A</a>	\$172.00	Optical fiber Dependent	N.O./N.C. selectable	NPN	2m [6.5 ft] axial cable	Diagram 1	Figure 1
<a href="#">DFT-AN-1F</a>	\$172.00				M8 [8mm] connector	Diagram 1	Figure 2
<a href="#">DFT-AP-1A</a>	\$172.00			PNP	2m [6.5 ft] axial cable	Diagram 2	Figure 1
<a href="#">DFT-AP-1F</a>	\$172.00				M8 [8mm] connector	Diagram 2	Figure 2

Specifications		
Type	DFT-AN-1*	DFT-AP-1*
Sensing Distance	See Optical Fibers Table	
Light Spot Diameter	N/A	
Emission	red (680nm)	
Sensitivity	Dual Teach function	
Output Type	NPN Light-on or Dark-on Selectable Output delay or stretch programmable	PNP Light-on or Dark-on Selectable Output delay or stretch programmable
Operating Voltage	10-30VDC	
No-Load Supply Current	≤ 25mA	
Operating (Load) Current	≤ 200mA	
Off-state (Leakage) Current	≤ 0.1mA	
Voltage Drop	2V maximum at 200mA	
Switching Frequency	1.5 kHz	
Ripple	m20%	
Time Delay Before Availability (tv)	80ms	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25 to 55°C [-13 to 131°F]	
Protection Degree	IEC IP64	
LED Indicators -Switching Status	Yellow (output energized)	
Housing Material	PBT	
Lens Material	Acrylic	
Shock/Vibration	<a href="#">See terminology section</a>	
Tightening Torque	N/A	
Weight (cable/connector)	68g [2.39oz] / 17g [0.60oz]	
Connectors	2m [6.5 ft] axial cable; M8 [8mm] connector	
Agency Approvals	UL file E328811	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

## Dimensions

(mm)

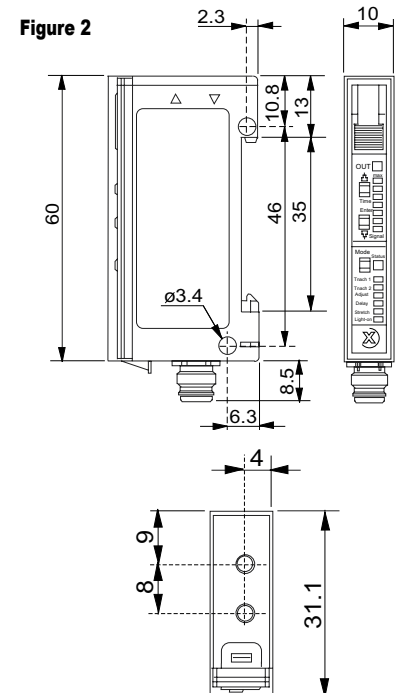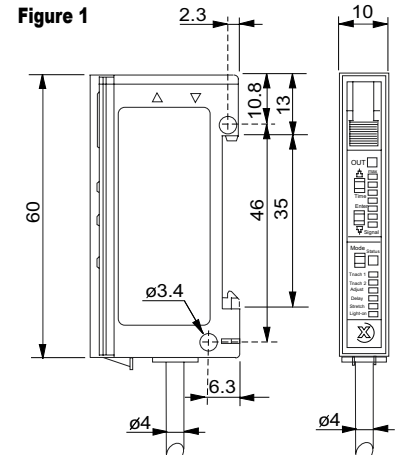

## Wiring Diagrams

Diagram 1

NPN Output






Diagram 2

PNP Output



Connector

M8 Connector



## Switching Element Function

	Through-beam and Reflective Models	Diffuse Reflective Models
Light-on	N.C.	N.O.
Dark-on	N.O.	N.C.



# DFP Series Fiber Photoelectric Amplifiers

## Compact Rectangular Plastic DIN rail Mount DC



- DIN rail mounting
- 12-turn potentiometer sensitivity setting with illuminated scale
- NPN or PNP, Light-on/Dark-on selectable outputs
- Red LED with visible spot
- IP64 rated



### DFP Series Fiber Photoelectric Amplifier Selection Chart

Part Number	Price	Sensing Range	Output State	Logic	Connection	Wiring	Dimensions
<a href="#">DFP-AN-1A</a>	\$109.00	Optical fiber dependent	N.O./N.C. selectable	NPN	2m [6.5 ft] axial cable	Diagram 1	Figure 1
<a href="#">DFP-AN-1F</a>	\$109.00				M8 [8mm] connector	Diagram 1	Figure 2
<a href="#">DFP-AP-1A</a>	\$109.00			PNP	2m [6.5 ft] axial cable	Diagram 2	Figure 1
<a href="#">DFP-AP-1F</a>	\$109.00				M8 [8mm] connector	Diagram 2	Figure 2



### Specifications

Type	DFP-AN-1*	DFP-AP-1*
<b>Sensing Distance</b>	See Optical Fibers Table	
<b>Light Spot Diameter</b>	N/A	
<b>Emission</b>	red (680nm)	
<b>Sensitivity</b>	12-turn Potentiometer with illuminated scale	
<b>Output Type</b>	NPN Light-on or Dark-on Selectable	PNP Light-on or Dark-on Selectable
<b>Operating Voltage</b>	10-30VDC	
<b>No-load Supply Current</b>	≤15mA	
<b>Operating (Load) Current</b>	≤200mA	
<b>Off-state (Leakage) Current</b>	≤0.1mA	
<b>Voltage Drop</b>	2V maximum at 200mA	
<b>Switching Frequency</b>	1.5kHz	
<b>Ripple</b>	≤20%	
<b>Time Delay Before Availability (tv)</b>	300ms	
<b>Short-Circuit Protection</b>	Yes (switch auto-resets after overload is removed)	
<b>Operating Temperature</b>	-25 to 55°C [-13 to 131°F]	
<b>Protection Degree</b>	IEC IP64	
<b>LED Indicator - Switching Status</b>	Pin 4 (black): switching status - yellow Pin 2 (pink): excess gain status - green	
<b>Housing Material</b>	PBT	
<b>Lens Materials</b>	Acrylic	
<b>Shock/Vibration</b>	See terminology section	
<b>Tightening Torque</b>	N/A	
<b>Weight (cable/connector)</b>	69g [2.44oz] / 18g [0.63oz]	
<b>Connectors</b>	2m [6.5 ft] axial cable; M8 [8mm] connector	
<b>Agency Approvals</b>	UL file E32881	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

### Dimensions

(mm)

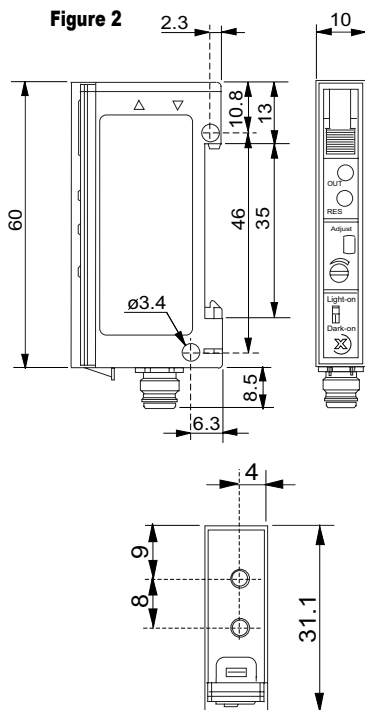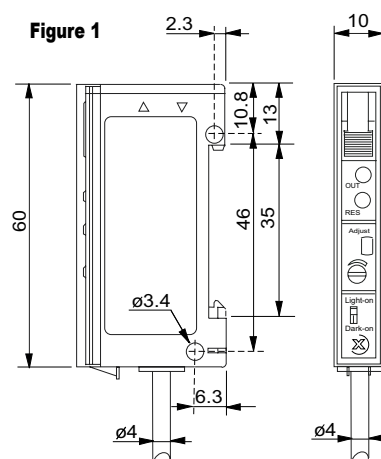

### Wiring Diagrams

Diagram 1

NPN Output






Diagram 2

PNP Output



Connector

M8 Connector



### Switching Element Function

	Through-beam and Reflective Models	Diffuse Reflective Models
<b>Light-on</b>	N.C.	N.O.
<b>Dark-on</b>	N.O.	N.C.

# Accessories for 50 Series Photoelectric Sensors

## Mounting Brackets


Short, tall or ball-swivel style of mounting brackets are available. All styles allow 360° rotation of the sensor.

*Note: Cutler-Hammer parts available for sale to North America locations only.*


## Dimensions

mm [inches]


Accessories for Enhanced 50 Series Sensors			
Part Number	Price	Description	Weight [lb]
<a href="#"><u>6150E-6501</u></a>	\$7.75	Mounting bracket, right-angle, 1.5in vertical adjustment, nickel plated steel. For use with CH Enhanced 50 Series sensor.	0.20
<a href="#"><u>6150E-6502</u></a>	\$10.00	Mounting bracket, right-angle, 3.5in vertical adjustment, nickel plated steel. For use with CH Enhanced 50 Series sensor.	0.39
<a href="#"><u>6150E-6503</u></a>	\$10.00	Mounting bracket, right-angle ball swivel, 60 degree vertical and horizontal adjustment, plastic. For use with CH Enhanced 50 Series sensor. Ball swivel allows for ±30° angle.	0.11

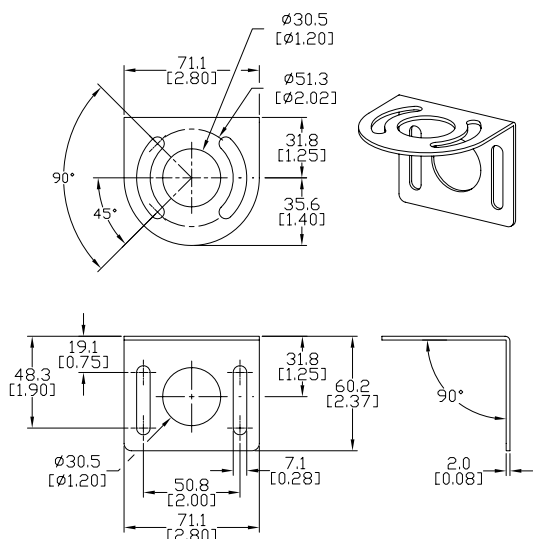

[6150E-6501](#)

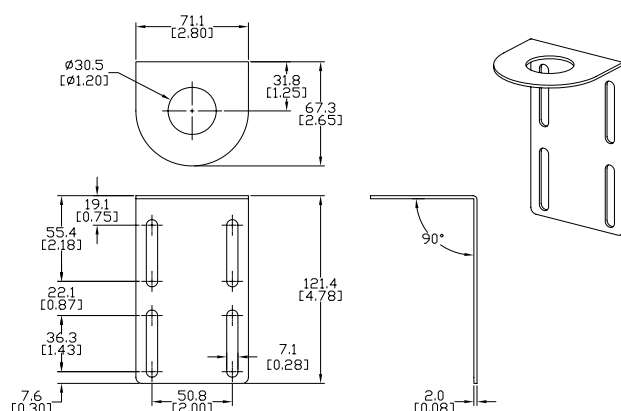

[6150E-6502](#)

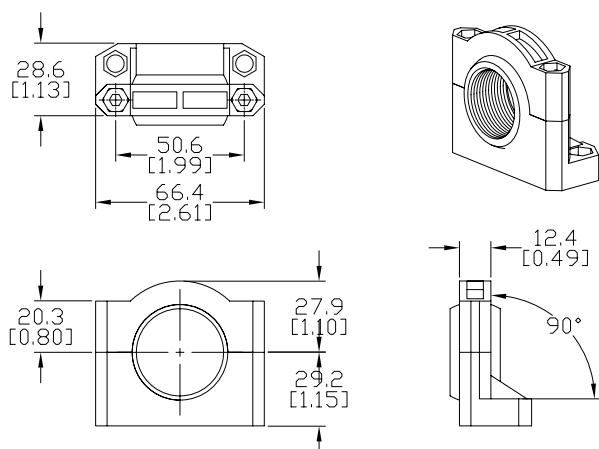

[6150E-6503](#)