

Light Duty Incremental Encoders (SAE Dimension Encoders)

TRDA-2E series

Accessories

Accessories for TRDA-2E Series Encoders		
Part Number	Price	Description
<u>F-2D</u>	\$42.50	JTEKT round mounting flange, 1.86in bolt hole circle, (1.05in height), metal. For use with JTEKT TRDA-2E series encoders. Flange and encoder mounting hardware included.
<u>F-3D</u>	\$75.00	JTEKT round mounting flange, 2.95in bolt hole circle (1.34in height), metal. For use with JTEKT TRDA-2E series encoders. Flange and encoder mounting hardware included.
<u>F-6D</u>	\$57.50	JTEKT round mounting flange, 1.86in bolt hole circle, (1.34in height), metal. For use with JTEKT TRDA-2E series encoders. Flange and encoder mounting hardware included.
<u>F-7D</u>	\$42.50	JTEKT round mounting flange, 1in bolt hole circle (0.20in height), metal. For use with JTEKT TRDA-2E series encoders. Flange and encoder mounting hardware included.
<u>F-8D</u>	\$57.50	JTEKT round mounting flange, 2.95in bolt hole circle, (1.71in height), metal. For use with JTEKT TRDA-2E series encoders. Flange and encoder mounting hardware included.
<u>2ET-035D</u>	\$60.00	JTEKT right angle bracket, metal. For use with JTEKT TRDA-2E series encoders. Bracket and encoder mounting hardware included.


Couplings

For encoders with a solid shaft, please select a coupling that fits your encoder. All couplings are in stock, ready to ship.


See the "Encoder Couplings" section for more information.




2ET-035D




F-2D




F-3D



F-6D



F-7D



F-8D

Light Duty Incremental Encoders (SAE Dimension Encoders)

Specifications – TRDA-2E series

Electrical Specifications (SAE Dimension Light Duty)				
Model			TRDA-2ExxxxBD (open collector)	TRDA-2ExxxxVD (line driver)
Power Supply	Operating Voltage *		12–24 VDC (nominal) * Range: 10.8–26.4 VDC	5VDC (nominal) * Range: 4.75–5.25 VDC
	Allowable Ripple		3% rms max.	
	Current Consumption		50mA max. no load	
Output Waveform	Signal Waveform		Quadrature + home position	
	Max. Response Frequency		200kHz	
	Operating Speed		(max response frequency / resolution) x 60	
	Duty Ratio (Symmetry)		50% ±25%	
	Index Signal Width (at Home Position)		100% ±50%	
Output	Rise/Fall Time **		1μs max. **	100 ns max. **
	Output Type		Open collector (NPN sinking)	Line driver (26C31 or equivalent)
	Output Logic		Negative logic (active low)	Positive logic (active high)
	Output Current	Inflow	30mA max.	20mA max.
		Outflow	–	
	Output Voltage	H	–	2.5 V min.
		L	0.4 V max.	0.5 V max.
	Load Power Supply Voltage		30VDC max.	–
	Short-circuit Protection		Between each output and 0V	–
* To be supplied by Class II source.				
** With a cable of 2m or less; Max load.				
Mechanical Specifications				
Starting Torque	0.01 N·m [0.09 lb-in] max. @ 20 °C [68 °F]			
Max. Allowable Shaft Load	Axial: 20N [4.5 lb]; Radial: 30N [6.7 lb]			
Max. Allowable Speed	5000 rpm (highest speed that can support the mechanical integrity of encoder)			
Wire Size	26 AWG, shielded, oil-resistant PVC			
Mounting Orientation	can be mounted in any orientation			
Weight	approx. 170g [6.0 oz] (with 2m cable)			
Environmental Specifications				
Ambient Temperature	-10 to 70 °C [14 to 158 °F]			
Storage Temperature	-25 to 85 °C [-13 to 185 °F]			
Operating Humidity	35–85% RH (non-condensing)			
Voltage Withstand	630V grounded through capacitor (a 630V cap is connected between 0V & FG lines)			
Insulation Resistance	50 MΩ min. (excluding shield)			
Vibration Resistance	durable for one hour along three axes @ 10 to 55 Hz with 0.75 mm half-amplitude			
Shock Resistance	490 m/s ² (11 ms applied three times along three axes)			
Protection	IP50			
Agency Approvals	cUL _{US} (E189395)			


Light Duty Incremental Encoders (SAE Dimension Encoders)

Specifications – TRDA-2E series

Wiring Diagrams


Open Collector Connections

Cable shield is connected to the encoder body (frame ground)

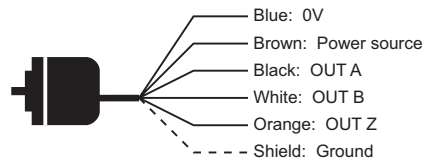

Line Driver Connections

Cable shield is connected to the encoder body (frame ground)

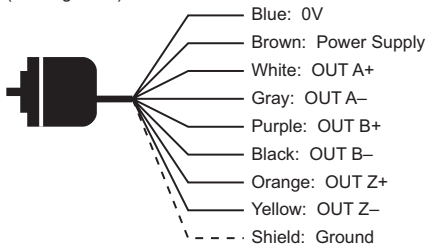

How to read the timing charts

Open Collector Models

Out A and Out B are 90 degrees out of phase. Like any quadrature encoder, four unique logic states are created internally to the encoder. This is based on the rising edge to rising edge (one cycle) on channel A or B that indicates one set of bars on the internal encoder disk has passed by the optical sensor.


OUT Z is the absolute reference added to an incremental encoder and is also known as home position. It signifies a full rotation of the encoder shaft.

Line Driver Models

Channel A (OUT A and A-not) and Channel B (OUT B and B-not) are also 90 degrees out of phase on line driver encoders. OUT Z is the same as on open collector models, and is the absolute reference (home position). It signifies one full rotation of the encoder shaft.


Channel Timing Charts

Open Collector Models (TRDA-2ExxBD)

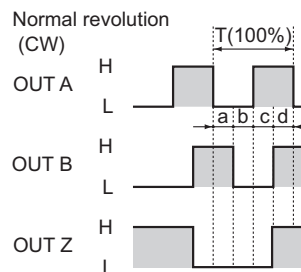

a, b, c, d = $1/4T \pm 1/8T$
"Normal" means clockwise revolution viewed from the shaft

Line Driver Models (TRDA-2ExxxVD)

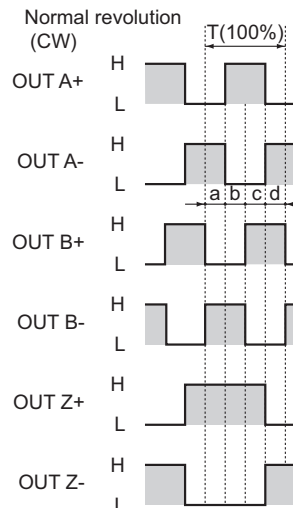


a, b, c, d = $1/4T \pm 1/8T$
"Normal" means clockwise revolution viewed from the shaft

Light Duty Incremental Encoders (SAE Dimension Encoders)


Dimensions – TRDA-2E series

Dimensions = in [mm]


TRDA-2ExxxD

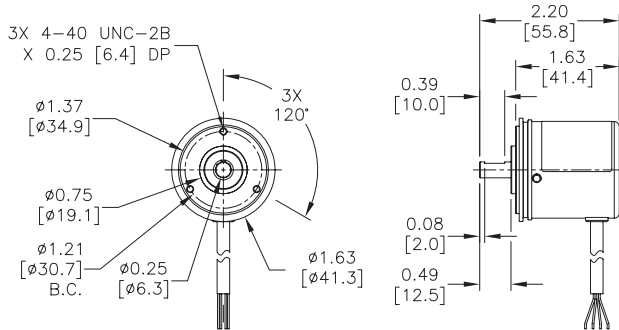


2ET-035D Mounting Bracket

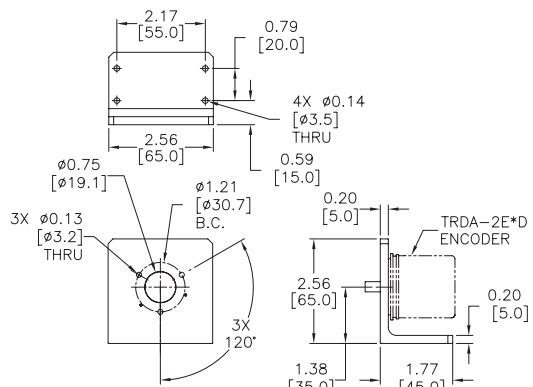


F-2D Mounting Flange

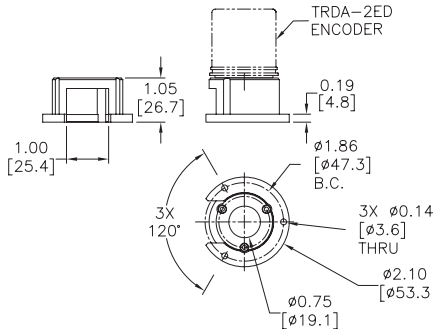


F-7D Mounting Flange

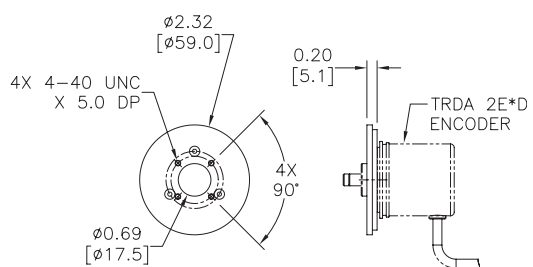


F-3D Mounting Flange

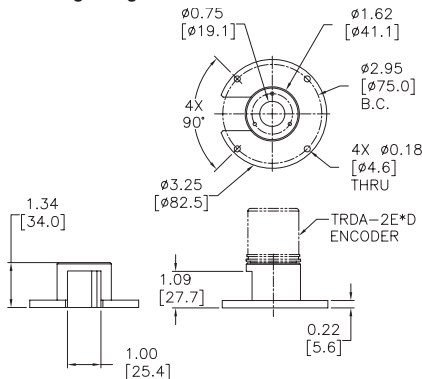

F-8D Mounting Flange

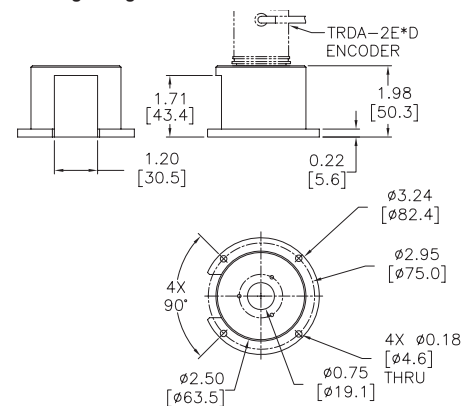

F-6D Mounting Flange

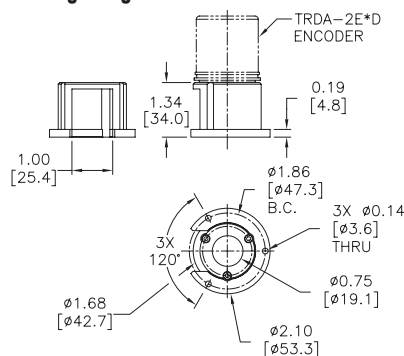

Light Duty Incremental Encoders (Metric Dimension Encoders)

TRD-MX series Features

A light duty incremental rotary encoder that is cost-effective for small applications; has the following features:

- Small body with 25 mm diameter and 29 mm depth
- 4 mm diameter solid shaft
- Resolution available from 100 pulses per revolution to 1024 pulses per revolution
- Open collector output (4.5–13.2 or 10.8–26.4 VDC), or line driver output (4.75–5.25 VDC)
- Up to 100 kHz response frequency
- Two-meter cable with tinned ends
- IP50 environmental rating
- Mounting bracket and couplings are available



TRD-MXxxx-AD/BD models



TRD-MXxxx-VD models

Light Duty Solid-shaft Incremental Encoders (NPN Open-collector Output, TRD-MXxxxAD/ BD)					
Part Number	Price	Pulses per Revolution	Input Voltage	Output	Body Dia.
<u>TRD-MX100AD</u>	\$96.00	100	4.5–13.2 VDC	NPN Open Collector	25 mm
<u>TRD-MX360AD</u>	\$96.00	360			
<u>TRD-MX500BD</u>	Retired	500	10.8–26.4 VDC		

Light Duty Solid-shaft Incremental Encoders (Line Driver Output, TRD-MXxxxVD)					
Part Number	Price	Pulses per Revolution	Input Voltage	Output	Body Dia.
<u>TRD-MX100VD</u>	Retired	100	4.75–5.25 VDC	Line Driver	25 mm
<u>TRD-MX360VD</u>	Retired	360			
<u>TRD-MX500VD</u>	Retired	500			

Accessories

Accessories for TRD-MX Series Encoders		
Part Number	Price	Description
<u>MM-4D</u>	Retired	Servo mounting clamp for TRD-MX series encoders
<u>MT-030D</u>	\$39.00	Right-angle mounting bracket for TRD-MX series encoders



MM-4D



MT-030D

Couplings

For encoders with a solid shaft, please select a coupling that fits your encoder. All couplings are typically in stock, and ready to ship.

See the "Encoder Couplings" section for more information.



Couplings

Light Duty Incremental Encoders (Metric Dimension Encoders)

Specifications – TRD-MX series

Electrical Specifications (Metric Dimension Light Duty TRD-MX)				
Model		TRD-MXxxxAD (open collector)	TRD-MXxxxBD (open collector)	TRD-MXxxxVD (line driver)
Power Supply	Operating Voltage *	5–12 VDC (nominal) * 4.5–13.2 VDC	12–24 VDC (nominal) * 10.8–26.4 VDC	5VDC (nominal) * 4.75–5.25 VDC
	Allowable Ripple	3% rms max		
	Current Consumption	50 mA max (no load)		
	Circuit Protection Required	Limit current to 100 mA or less		–
Output Waveform	Signal Waveform	Quadrature + home position		
	Max. Response Frequency	100 kHz		
	Operating Speed	(max response frequency / resolution) x 60 Hz		
	Duty Ratio (Symmetry)	50% ±25%		
	Index Signal Width (at Home Position)	100% ±50%		
Output	Rise/Fall Time **		2µs ** (sink current < 30 mA)	0.1 µs max ** (source current < 20 mA)
	Output Type		Open collector (NPN sinking)	Line driver (26C31 or equivalent)
	Output Logic		Negative logic (active low)	Positive logic (active high)
	Output Current	Inflow	30 mA max	20 mA max
		Outflow	–	
	Output Voltage	H	–	2.5V min (source current < 20 mA)
		L	0.4V max (sink current < 30 mA)	0.5V max (source current < 20 mA)
	Load Power Voltage		30 VDC max	–
	Short-circuit Protection		–	–
* To be supplied by Class II source. ** Cable length ≤2m or less. Maximum load.				
Mechanical Specifications (Metric Dimension Light Duty TRD-MX)				
Starting Torque		0.001 N·m [0.009 lb·in] max @ 20 °C [68 °F]		
Max. Allowable Shaft Load		Axial: 5N [1.1 lb]; Radial: 10N [2.2 lb]		
Max. Allowable Speed		6000 rpm (highest speed that can support the mechanical integrity of encoder)		
Wire Size		26 AWG, shielded, oil-resistant PVC		
Weight		approx 120g [0.3 lb]		
Environmental Specifications (Metric Dimension Light Duty TRD-MX)				
Ambient Temperature		-10 to 70 °C [14 to 158 °F]		
Storage Temperature		-25 to 85 °C [-13 to 185 °F]		
Operating Humidity		35–85% RH (non-condensing)		
Withstand Voltage *		630V grounded through capacitor (a 630V cap is connected between 0V & FG lines)		
Insulation Resistance		20 MΩ min		
Vibration Resistance		durable for one hour along three axes @ 10 to 55 Hz with 0.75 mm half-amplitude		
Shock Resistance		490 m/s ² (11 ms applied 3-times, each X, Y, Z)		
Mounting Orientation		can be mounted in any orientation		
Protection		IP50		
Agency Approvals		CE, RoHS, cUL _{US} (E189395)		
* Withstand voltage is good for power supply, signal, and case; not good for shield wire.				


Light Duty Incremental Encoders (Metric Dimension Encoders)

Specifications – TRD-MX series

Wiring Diagrams


Open Collector Connections

Cable shield is connected to the encoder body (frame ground)

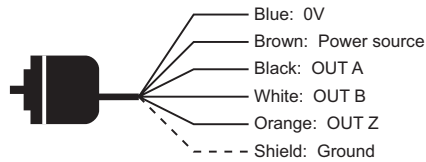

Line Driver Connections

Cable shield is connected to the encoder body (frame ground)

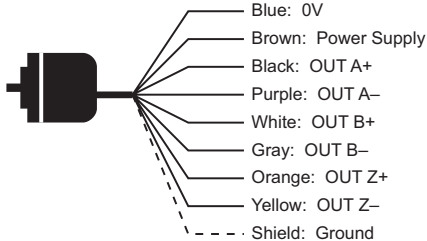

How to read the timing charts

Open Collector Models

Out A and Out B are 90 degrees out of phase. Like any quadrature encoder, four unique logic states are created internally to the encoder. This is based on the rising edge to rising edge (one cycle) on channel A or B that indicates one set of bars on the internal encoder disk has passed by the optical sensor.

OUT Z is the absolute reference added to an incremental encoder and is also known as home position. It signifies a full rotation of the encoder shaft. It pulses once per revolution.


Line Driver Models

Channel A (OUT A and A-not) and Channel B (OUT B and B-not) are also 90 degrees out of phase on line driver encoders. OUT Z is the same as on open collector models, and is the absolute reference (home position). It signifies one full rotation of the encoder shaft. It pulses once per revolution.

Channel Timing Charts

Open Collector Models (TRD-MXxxxAD/BD)

Normal revolution (CW)




a, b, c, d = $0.25T \pm 0.125T$; e = $1T \pm 0.125T$

"Normal" means clockwise revolution viewed from the shaft

Line Driver Models (TRD-MXxxxVD)

Normal revolution (CW)

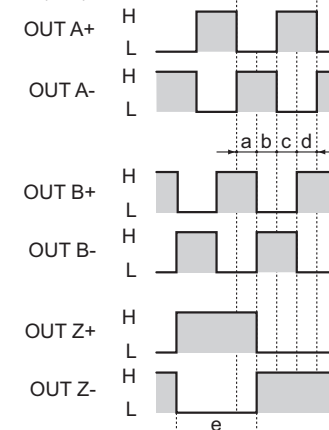


a, b, c, d = $0.25T \pm 0.125T$; e = $1T \pm 0.125T$

"Normal" means clockwise revolution viewed from the shaft


Dimensions – TRD-MX series

Dimensions = mm [in]

TRD-MXxxxD

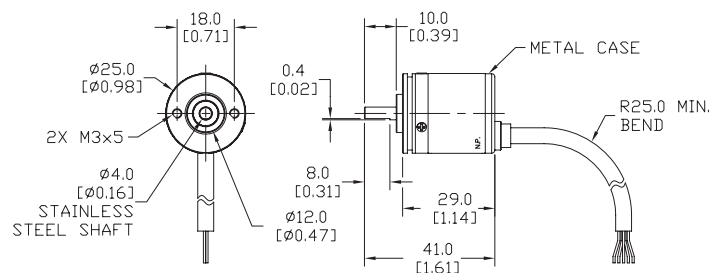


MM-4D Mounting Clamp

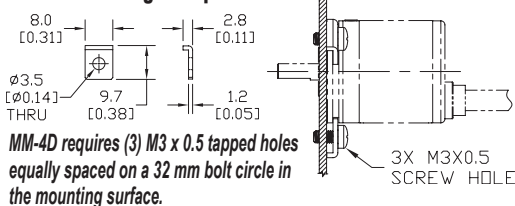

MM-4D requires (3) M3 x 0.5 tapped holes equally spaced on a 32 mm bolt circle in the mounting surface.

MT-030D Mounting Bracket

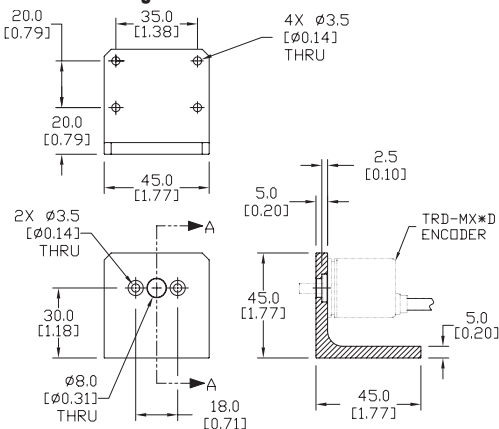

SECTION A-A

Light Duty Incremental Encoders (Metric Dimension Encoders)

TRD-S(H) series

Features

A light duty encoder that is cost-effective for small applications and has the following features:

- Small body with 38 mm diameter and 30 mm depth
- Dust proof (IP40 rating)
- 6 mm solid shaft or 8 mm hollow shaft
- Resolution available from 100 pulses per revolution to 2500 pulses per revolution
- Open collector or line driver output
- Up to 200 kHz response frequency
- Two-meter cable, tinned ends



Solid-shaft (TRD-S) model



Hollow-shaft (TRD-SH) model

Light Duty Solid Shaft Incremental Encoders (NPN Open Collector and Line Driver models)					
Part Number	Price	Pulses per Revolution	Input Voltage	Output	Body Diameter
<u>TRD-S100AD</u>	Retired	100	5-12 VDC	NPN open collector	38mm
<u>TRD-S360AD</u>	Retired	360			
<u>TRD-S500AD</u>	Retired	500			
<u>TRD-S1000AD</u>	Retired	1000			
<u>TRD-S1024AD</u>	Retired	1024			
<u>TRD-S2500AD</u>	Retired	2500			
<u>TRD-S250BD</u>	Retired	250	12-24 VDC	NPN open collector	
<u>TRD-S300BD</u>	Retired	300			
<u>TRD-S600BD</u>	Retired	600			
<u>TRD-S1000-BD</u>	Retired	1000			
<u>TRD-S1024-BD</u>	Retired	1024			
<u>TRD-S1200BD</u>	Retired	1200			
<u>TRD-S100-VD</u>	\$111.00	100	5VDC	Line driver (differential)	
<u>TRD-S250VD</u>	Retired	250			
<u>TRD-S300VD</u>	\$111.00	300			
<u>TRD-S400VD</u>	Retired	400			
<u>TRD-S800VD</u>	\$111.00	800			
<u>TRD-S1000-VD</u>	Retired	1000			
<u>TRD-S1200VD</u>	\$111.00	1200			
<u>TRD-S2500-VD</u>	Retired	2500			

Light Duty Hollow Shaft Incremental Encoders (NPN Open Collector and Line Driver models)					
Part Number	Price	Pulses per Revolution	Input Voltage	Output	Body Diameter
<u>TRD-SH100AD</u>	Retired	100	5-12 VDC	NPN open collector	38mm
<u>TRD-SH360AD</u>	\$113.00	360			
<u>TRD-SH500AD</u>	Retired	500			
<u>TRD-SH1000AD</u>	Retired	1000			
<u>TRD-SH1024AD</u>	Retired	1024			
<u>TRD-SH2500AD</u>	Retired	2500			
<u>TRD-SH400BD</u>	Retired	400	12-24 VDC	NPN open collector	
<u>TRD-SH500-BD</u>	Retired	500			
<u>TRD-SH600BD</u>	Retired	600			
<u>TRD-SH1000-BD</u>	Retired	1000			
<u>TRD-SH1200BD</u>	Retired	1200			
<u>TRD-SH2000BD</u>	Retired	2000			
<u>TRD-SH2500-BD</u>	Retired	2500	5VDC	Line driver (differential)	
<u>TRD-SH100-VD</u>	Retired	100			
<u>TRD-SH200VD</u>	Retired	200			
<u>TRD-SH250VD</u>	\$113.00	250			
<u>TRD-SH300VD</u>	\$113.00	300			
<u>TRD-SH360-VD</u>	Retired	360			
<u>TRD-SH400VD</u>	\$113.00	400			
<u>TRD-SH500-VD</u>	Retired	500			
<u>TRD-SH600VD</u>	Retired	600			
<u>TRD-SH800VD</u>	\$113.00	800			
<u>TRD-SH1000-VD</u>	Retired	1000			
<u>TRD-SH1200VD</u>	\$119.00	1200			
<u>TRD-SH2000VD</u>	Retired	2000			
<u>TRD-SH2500-VD</u>	Retired	2500			

Light Duty Incremental Encoders (Metric Dimension Encoders)



Specifications – TRD-S(H) series

Electrical Specifications				
Model		TRD-SxxxxAD TRD-SHxxxxAD (open collector)	TRD-Sxxxx-BD TRD-SHxxxxBD (open collector)	TRD-Sxxxx-VD TRD-SHxxxxVD (line driver)
Power Supply	Operating Voltage *	5–12 VDC (nominal) * Range: 4.75–13.2 VDC	12–24 VDC (nominal) * Range: 10.8–26.4 VDC	5VDC (nominal) * Range: 4.75–5.25 VDC
	Allowable Ripple	3% max.		
	Current Consumption	50 mA max.		
Signal Waveform		Quadrature + home position		
Max. Response Frequency		200kHz		
Operating Speed		(max response frequency / resolution) x 60		
Duty Ratio		50% ±25%		
Phase Difference Width		25% ±12.5%		
Signal Width at Home Position		100 ±50%		
Output	Rise/Fall Time		1µs max. (when cable length is 1m)	–
	Output Type		NPN open collector output, sinking	Line driver output (26C31 or equivalent)
	Output Logic		Negative logic (active low)	Negative logic (active high)
	Output Voltage	H	–	2.5 V min.
		L	0.4 V max.	0.5 V max.
	Current		30mA max.	20 mA max.
	Load Power Voltage		35 VDC max.	–
Short-Circuit Protection		Between output and power supply		–
* To be supplied by Class II source				
Mechanical Specifications				
Starting Torque	0.001 Nm (0.00074 ft/lb) max			
Max. Allowable Shaft Load	Radial: 20N (4.5 lb); Axial: 10N (2.25 lb)			
Max. Allowable Speed	6000 rpm (highest speed that can support the mechanical integrity of encoder)			
Wire Size	AWG26			
Mounting Orientation	can be mounted in any orientation			
Weight	approx. 150g (5.3 oz) with 2m cable			
Environmental Specifications				
Ambient Temperature	-10 to 70°C; 14 to 158°F			
Storage Temperature	-25 to 85°C; -13 to 185°F			
Operating Humidity	35–85% RH			
Withstand Voltage	500VAC (50/60Hz) for one minute			
Insulation Resistance	50MΩ min.			
Vibration Resistance	durable for one hour along three axes at 10 to 55 Hz with 0.75 amplitude			
Shock Resistance	11 ms with 490 m/s ² applied three times along three axes			
Protection	IP40			


Light Duty Incremental Encoders (Metric Dimension Encoders)

Dimensions – TRD-S(H) series

Solid-shaft models

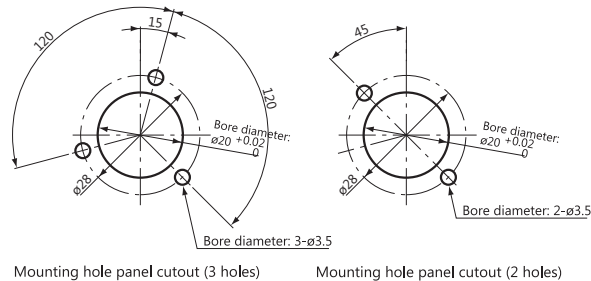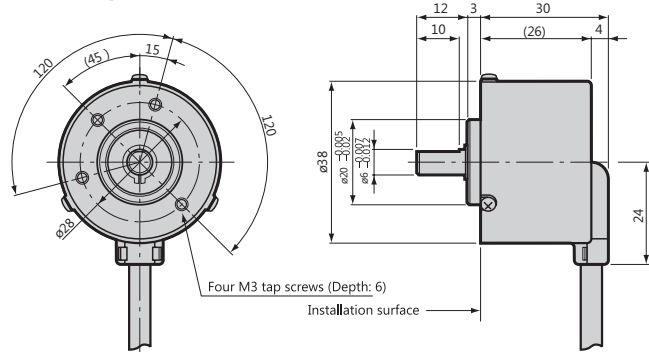


Hollow-shaft models

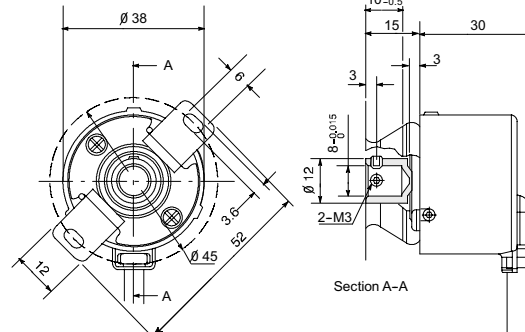

All dimensions in mm
1mm = 0.03937in


Mounting Accessories		
Part #	Price	Description
TRD-SH-BKT	\$7.00	JTEKT flexible mounting bracket, replacement, metal. For use with JTEKT TRD-SH series hollow shaft encoders.



Wiring diagrams


Open collector connections

Cable shield is not connected to the encoder body; enclosure is grounded through the 0V wire

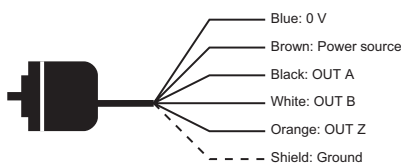


Line driver connections

Cable shield is not connected to the encoder body; enclosure is grounded through the 0V wire

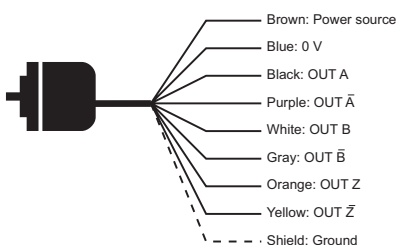


Channel timing charts

Open Collector Models

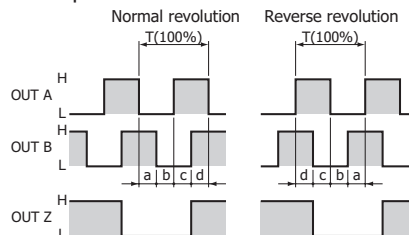

Line Driver Models

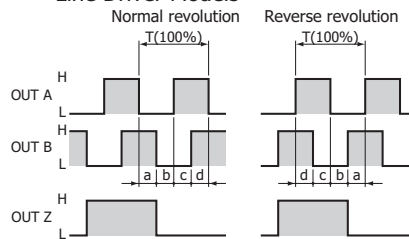

a, b, c, = $1/4T \pm 1/8T$
"Normal" means clockwise revolution viewed from the shaft.

How to read the timing charts

Open Collector Models

OUT A and OUT B are 90 degrees out of phase. Like any quadrature encoder, four unique logic states are created internally to the encoder. This is based on the rising edge to rising edge (one cycle) on channel A or B that indicates one set of bars on the internal encoder disk has passed by the optical sensor.

OUT Z is the absolute reference added to an incremental encoder and is also known as home position. It signifies a full rotation of the encoder shaft.

Line Driver Models


Channel A (OUT A and A-not) and Channel B (OUT B and B-not) are also 90 degrees out of phase on line driver encoders. OUT Z is the same as on open collector models, and is the absolute reference (home position). It signifies one full rotation of the encoder shaft.

Encoder Accessories – Couplings

Encoder Couplings

Couplings provide a connection between solid-shaft encoders and solid shafts. We offer aluminum, fiberglass, and polymer couplings for metric, S.A.E. and metric-to-S.A.E. applications.

Misalignment compensation




Couplings Selection Guide and Dimensions																
Type	Part Number	Price	Applicable Encoders (shaft size)	Shaft Diameter		D	L	F	C	M	a	E	S	Working Torque	Torsional Rigidity	Material
				d1	d2						max					
						(mm [in])			(mm [in])			(N·m)				
Fiberglass (metric)	GJ-4D	\$12.00	TRD-MX (4mm)	4mm	4mm	13 [0.51]	21 [0.83]	5.3 [0.21]	3 [0.12]	M3 set screw	5°	0.4 [0.02]	0.4 [0.02]	0.6 N·m	6 N·m/rad	Glass-fiber reinforced resin
	GJ-6D	\$9.25	TRD-S/SR (6mm)	6mm	6mm	15 [0.59]	22 [0.87]	5.2 [0.20]	3 [0.12]	M3 set screw	6°	0.5 [0.02]	0.12 [0.005]	0.8 N·m	10 N·m/rad	
	GJ-8D	\$11.00	TRD-N/NA (8mm)	8mm	8mm	19 [0.75]	24 [0.94]	6.8 [0.27]	3.5 [0.14]	M4 set screw	5°	0.5 [0.02]	0.4 [0.016]	1.5 N·m	20 N·m/rad	
	GJ-10D	\$12.00	TRD-GK (10 mm)	10 mm	10 mm	22 [0.87]	26 [1.02]	7.1 [0.28]	4 [0.16]	M4 set screw	5°	0.5 [0.02]	0.12 [0.005]	2.0 N·m	32 N·m/rad	
Fiberglass (SAE)	GJ-635D	\$22.00	TRDA-2E (0.25 in)	0.25 in	0.25 in	15 [0.59]	22 [0.87]	5.2 [0.20]	3 [0.12]	M3 set screw	5°	0.5 [0.02]	0.12 [0.005]	0.8 N·m	10 N·m/rad	Glass-fiber reinforced resin
	GJK-953D	\$27.00	TRDA-20/25 (0.375 in)	0.375 in	0.375 in	25 [0.98]	32 [1.26]	7.3 [0.29]	3.5 [0.14]	M4 set screw	5°	0.5 [0.02]	0.12 [0.005]	2.0 N·m	32 N·m/rad	
Polymer (SAE)	STP-MTRA-SC-1412	\$30.00	TRDA-2E (0.25 in)	0.25 in	0.50 in	25 [0.98]	38 [1.50]	9.9 [0.39]	5.4 [0.21]	M3 cap screw	5°	0.3 [0.01]	0.12 [0.005]	3.7 N·m	0.36 °/lb·in	Engineered polymer
	STP-MTRA-SC-3812	\$30.00	TRDA-20/25 (0.375 in)	0.375 in	0.50 in	25 [0.98]	38 [1.50]	9.9 [0.39]	5.4 [0.21]	M3 cap screw	5°	0.3 [0.01]	0.12 [0.005]	3.7 N·m	0.36 °/lb·in	
Aluminum (metric)	ARM-075-5-4D	\$51.50	TRD-MX (4mm)	4mm	5mm	19.1 [0.75]	19.1 [0.75]	4.6 [0.18]	2.4 [0.09]	M3 set screw	5°	0.25 [0.01]	0.25 [0.01]	2.3 N·m	8.2 N·m/rad	Aluminum alloy
	RU-075D	\$58.00	TRD-S/SR (6mm)	6mm	6mm	19.1 [0.75]	19.1 [0.75]	4.6 [0.18]	2.4 [0.09]	M3 set screw	5°	0.25 [0.01]	0.12 [0.005]	1.0 N·m	8.2 N·m/rad	
	JU-100D	\$51.50	TRD-N/NA (8mm)	8mm	8mm	25.4 [1.00]	25.4 [1.00]	6.6 [0.26]	3.8 [0.15]	M5 set screw	5°	0.25 [0.01]	0.25 [0.01]	1.6 N·m	14.3 N·m/rad	
	RU-100D	\$60.00	TRD-GK (10 mm)	10 mm	10 mm	25.4 [1.00]	25.4 [1.00]	6.6 [0.26]	3.8 [0.15]	M5 set screw	5°	0.25 [0.01]	0.12 [0.005]	1.6 N·m	14.3 N·m/rad	
Aluminum (metric-to-SAE)	ML13P-4-476D	\$51.50	TRD-MX (4mm)	4mm	0.1875 in	13 [0.51]	19 [0.75]	5.5 [0.22]	2.5 [0.10]	M2 set screw	5°	0.4 [0.02]	0.2 [0.01]	0.25 N·m	44 N·m/rad	Aluminum alloy (Bent plate: Polyimide)
	ML16P-4-635D	\$51.50	TRD-MX (4mm) TRDA-2E (0.25 in)	4mm	0.25 in	16 [0.63]	23 [0.91]	7 [0.28]	3 [0.12]	M3 set screw	5°	0.6 [0.02]	0.3 [0.01]	0.4 N·m	70 N·m/rad	
	MCGL16-6-635	\$33.00	TRD-S/SR (6mm) TRDA-2E (0.25 in)	6mm	0.25 in	16 [0.63]	23.2 [0.91]	7 [0.28]	3 [0.12]	M3 set screw	3.5°	0.3 [0.01]	0.3 [0.01]	0.4 N·m	70 N·m/rad	
	MCGL20-8-635	\$43.00	TRD-N/NA (8mm) TRDA-2E (0.25 in)	8mm	0.25 in	20 [0.79]	26 [1.02]	7.5 [0.30]	3.7 [0.15]	M3 set screw	3.5°	0.3 [0.01]	0.4 [0.02]	0.6 N·m	130 N·m/rad	
	MCGL20-8-952	\$44.00	TRD-N/NA (8mm) TRDA-20/25 (0.375 in)	8mm	0.375 in	20 [0.79]	26 [1.02]	7.5 [0.30]	3.7 [0.15]	M3 set screw	3.5°	0.3 [0.01]	0.4 [0.02]	0.6 N·m	130 N·m/rad	
	MCGL25-10-635	\$54.00	TRD-GK (10 mm) TRDA-2E (0.25 in)	10 mm	0.25 in	25 [0.98]	30.2 [1.19]	9 [0.35]	4 [0.16]	M4 set screw	3.5°	0.3 [0.01]	0.5 [0.02]	1.4 N·m	240 N·m/rad	
	MCGL25-10-952	\$55.00	TRD-GK (10 mm) TRDA-20/25 (0.375 in)	10 mm	0.375 in	25 [0.98]	30.2 [1.19]	9 [0.35]	4 [0.16]	M4 set screw	3.5°	0.3 [0.01]	0.5 [0.02]	1.4 N·m	240 N·m/rad	
Aluminum (SAE)	ARM-075-635-635D	\$52.00	TRDA-2E (0.25 in)	0.25 in	0.25 in	19.1 [0.75]	19.1 [0.75]	4.6 [0.18]	2.4 [0.09]	M3 set screw	5°	0.25 [0.01]	0.25 [0.01]	1.0 N·m	8.2 N·m/rad	Aluminum alloy
	ARM-100-9525-9525D	\$50.00	TRDA-20/25 (0.375 in)	0.375 in	0.375 in	25.4 [1.00]	25.4 [1.00]	6.6 [0.26]	3.8 [0.15]	M5 set screw	5°	0.25 [0.01]	0.25 [0.01]	1.6 N·m	14.3 N·m/rad	
* mm ÷ 25.4 = inches																

* mm ÷ 25.4 = inches


Encoder Accessories – Couplings

Encoder Couplings – Dimensions


GJ-xxD Fiberglass Couplings (metric) & GJx-xxxD Fiberglass Couplings (SAE)

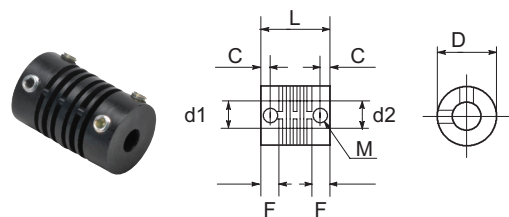


STP-MTRA-SC-xxxx Polymer Couplings

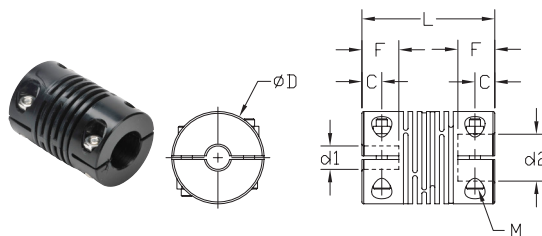


ARM-xxxxxxD Aluminum Couplings (metric & SAE)

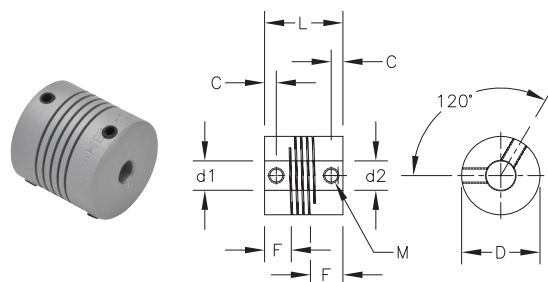

MCGLxx Aluminum Couplings & ML1xP-4-xxxD Aluminum Couplings

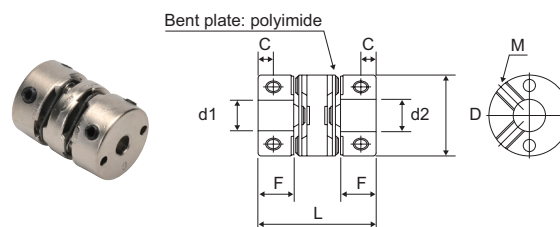

RU-075D, RU-100D, and JU-100D Aluminum Couplings

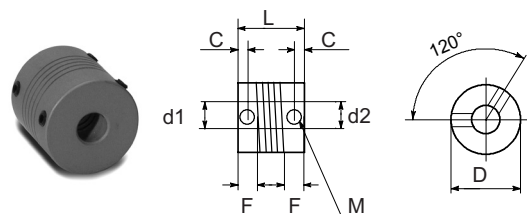

Max Radial Load (N)	Max Axial Load (N)	Available Resolutions (PPR)	Brand
NA*	NA*	Programmable Up to 4096	same sky
NA*	NA*	400, 1000	Surestep
20	10	100, 200, 360, 500, 600, 1000, 1024, 2000, 2500	JTEKT
20	20	100, 200, 360, 500, 1000, 1024, 200, 2048, 3600, 4096	lika
20	20	360, 1000, 1024, 2048	
30	30	1024	
100	100	Programmable from 1 to 16,384 (default 1024)	
50	50	250 (linear res: 0.36 deg/cts) 1250 (linear res: 0.072 deg/cts)	
50	30	100, 360, 500, 1000, 1024, 2500	JTEKT
50	30	100, 360, 500, 1000, 1024, 2500	
50	30	3, 4, 5, 10, 30, 40, 50, 60, 100, 120, 200, 240, 250, 300, 360, 400, 480, 500, 600, 750, 1000, 1024, 1200, 2000, 2500	
100	50	30, 100, 120, 200, 240, 250, 300, 360, 400, 500, 600, 1000, 1200, 2000, 2500, 3600, 5000	
50	30	32, 64, 128, 180, 256, 360, 512, 720, 1024 (gray code)	

*Jular/Kit encoders are direct mount, there are no load ratings

Mounting Brackets

Simplify your installation with a ready-to-use right-angle mounting bracket for light, medium and heavy-duty encoders.




Flanges

Flanges are available to ease encoder mounting to round or square faces along with miscellaneous mounting options.




Learn more about encoders

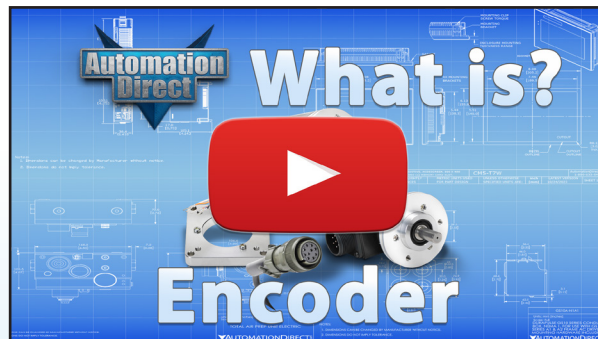

Click above or go to <http://go2adc.com/encoder> to view

Need a Measuring Wheel Encoder?

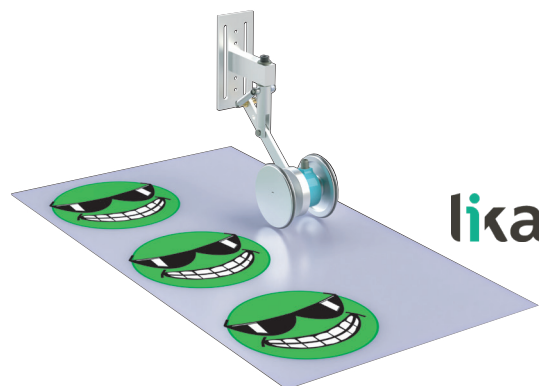

AR01 Series (Priced at \$299.00)

Medium-duty measuring wheels ride directly on the product (above or below) or a conveyor to measure or provide speed control feedback. These can also be used for cut-to-length and positioning applications.

- Metric and US/imperial wheel sizes
 - Standard 4" wheel (12.5" circumference)
 - Optional 80mm wheel (250mm circumference)
- Spring loaded arm with up to 30mm deflection
- IP65 environmental rating