


FC-ISO-C Encoder Signal Conditioner and Optical Isolator - Open Collector Output

\$166.00

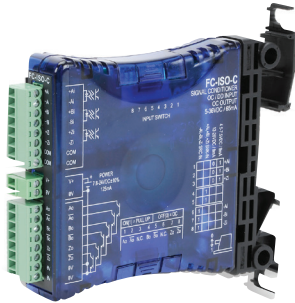

Overview

The FC-ISO-C high speed optical isolator module has the versatility to solve various interface problems between an incremental encoder signal and a PLC, servo drive, or other input device. Ideal for use with single-ended (open collector, NPN, pull-up, push-pull, totem pole) or differential line driver encoder signals, the three complementary inputs (A, B, Z, A-not, B-not, Z-not) are rated for 4.5-7.5 VDC and 12-26 VDC and frequency response up to 1 MHz. Input terminals A, B, and Z can be internally connected together and complementary input terminals A-not, B-not, and Z-not can be internally connected to common through DIP switches for simplified wiring.

The FC-ISO-C has three complementary open collector outputs (A, B, Z, A-not, B-not, Z-not) rated for 5-36 VDC that can be used in single ended configurations. The open collector output terminals can be connected to internal pull-up resistors through DIP switches for quick troubleshooting. Optical isolation rated at 1800V separates the input signals from the outputs. The slim-line plastic housing includes an integral 35mm DIN rail mounting adapter, LED indication, and removable screw terminal blocks for easy installation and wiring. The FC-ISO-C module is UL508 listed and CE marked.

Applications:

- Provide optical isolation between an encoder signal and PLC, servo drive, or other input device
- Solve electrically noisy signal problems
- Use as a repeater to allow longer cable runs
- Convert a differential line driver encoder signal to an open collector single-ended signal
- Change encoder signal voltage to match receiving electronics input
- Ideal for use with encoders, servo drive encoder signal inputs and outputs, or as a multi-channel, high speed optically isolated interface for sensors like photoelectric and proximity switches

Specifications

Input Specifications		
Input Voltage (DIP selectable)	4.5-7.5 VDC	12-26 VDC
Input Current	9mA typical, 18mA maximum	
Protection Type, Component	Surge, Suppressor Diode; Over current/temperature, Microprocessor	
Switching Threshold “0” Signal	< 2.2 VDC	< 3.9 VDC
Switching Threshold “1” Signal	> 2.6 VDC	> 4.8 VDC
Output Specifications		
Output Circuit	Open collector: 2-wire - floating or pull-up (DIP switch selectable); Sinking	
Output Rating	5-36 VDC	
Continuous Output Current	65mA maximum	
Overcurrent Trip Level	76mA minimum	
Quiescent Current	25µA maximum	
Output Voltage Protection	Polarity reversal, surge voltage protection	
Output Current Protection	Short circuit/Over Current/Over Current Limiting/Thermal Shutdown	
Timing Specifications		
Input to Output Response Time	1.3µs (max w/ 4.7k ohm internal pull-up resistor)	
Output Timing Difference (Ch. to Ch. Lag)	<20ns channel to channel (max)	
Rise Time (t _{on} w/ 1k ohm Load)	250ns	
Fall Time (t _{off} w/ 1k ohm Load)	38ns	
Max Frequency Response w/ 1k ohm Load	1MHz	
Rise Time (t _{on} w/ 2.2k ohm Load)	512ns	
Fall Time (t _{off} w/ 2.2k ohm Load)	56ns	
Max Frequency Response w/ 2.2k ohm Load	750kHz	
Rise Time (t _{on} w/ 4.7k Internal Pull-Up)	1.2µs	
Fall Time (t _{off} w/ 4.7k Internal Pull-Up)	25ns	
Max Frequency Response w/ 4.7k Internal Pull-Up	200kHz	
Terminal Block Specifications		
Number of Positions	2 pole (Dinkle: EC350V-02P), 8 pole (Dinkle: EC350V-08P)	
Wire Range	28-16 AWG Solid or Stranded Conductor; Wire strip length 9/32” (6-7mm)	
Screw Size (Slotted)	M 2.5 size, 0.4 T x 2.5 W mm (Screwdriver part number DN-SS1)	
Screw Torque	1.7 inch-pounds (0.19 Nm)	

FC-ISO-C Specifications Continued

Specifications (continued)	
General Specifications	
External DC Power Required	7.8-24VDC $\pm 10\%$ @ 125mA, 3.5W*
Power Dissipation Within Module	10W (maximum power with all outputs at max current and max voltage)
Thermal Dissipation	34.13 BTU/hr (1W = 3.413 BTU/hr)
Isolation	1800VAC input-output applied for 1 second
Mounting	35mm DIN Rail or panel mount (with no restrictions)
Operating Temperature	0 to 60°C (32 to 140°F) IEC 60068-2-14 (Test Nb, Thermal Shock)
Storage Temperature	-20 to 70°C (-4 to 158°F) IEC 60068-2-1 (Test Ab, Cold) IEC 60068-2-2 (Test Bb, Dry Heat) IEC 60068-2-14 (Test Na, Thermal Shock)
Humidity	5 to 95% (non-condensing) IEC 60068-2-30 (Test Db, Damp Heat)
Environmental Air	No corrosive gases permitted (EN61131-2 pollution degree 1)
Vibration	MIL STD 810C 514.2 IEC 60068-2-6 (Test Fc)
Shock	MIL STD 810C 516.2 IEC 60068-2-27 (Test Ea)
Insulation Resistance	>10M Ω @ 500VDC
Noise Immunity	NEMA ICS3-304 IEC 61000-4-2 (ESD) Impulse 1000V @ 1 μ S pulse IEC 61000-4-4 (FTB) RFI, (145MHz, 440MHz 5W @ 15cm) IEC 61000-4-3 (RFI)
Weight	0.3 lbs
Agency Approvals	UL*, cUL (File # E157382), CE


* in order to comply with UL508 the supplied power must be less than 26VDC and fused at a maximum of 3 amps.



Unit Front Face

Applications


Convert SureServo line driver Input/Output Terminals (CN1) to a 24VDC open collector single ended signal that is compatible with a PLC high speed counter interface module.

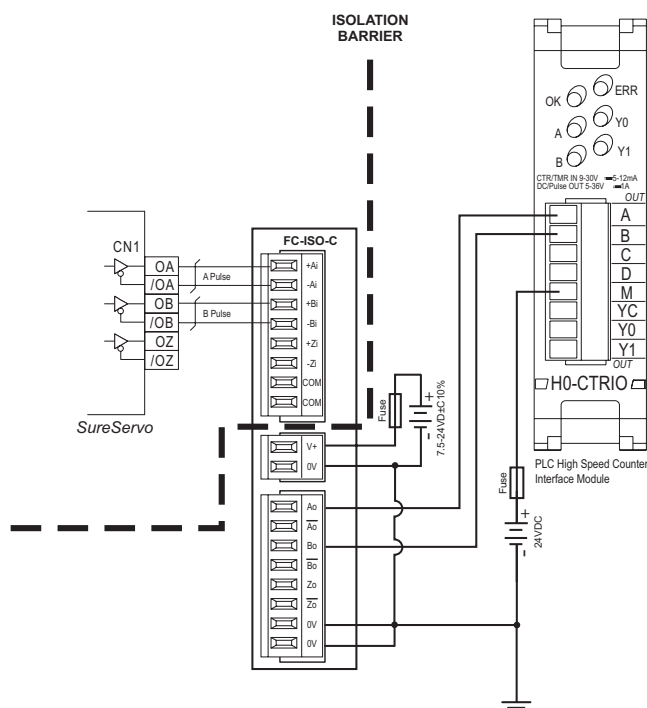

FC-ISO-C Applications and Dimensions


Applications Continued

Convert a 5VDC differential line driver encoder signal to a 24VDC open collector single-ended signal that is compatible with a PLC high speed counter interface module.

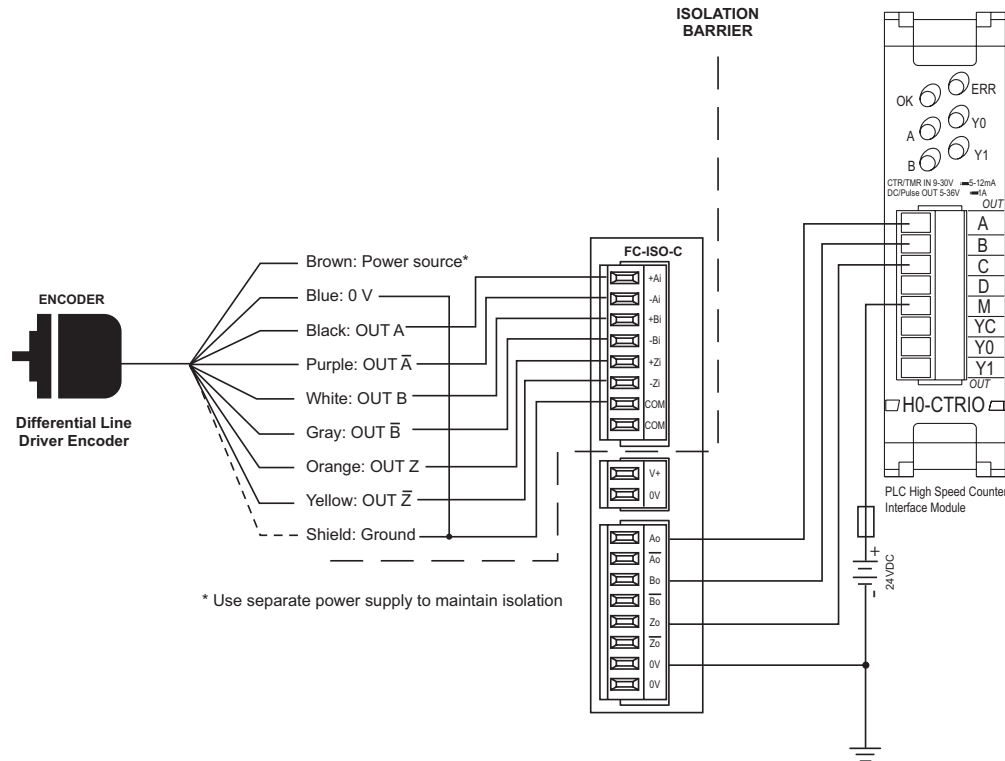

Dimensions

inches [mm]

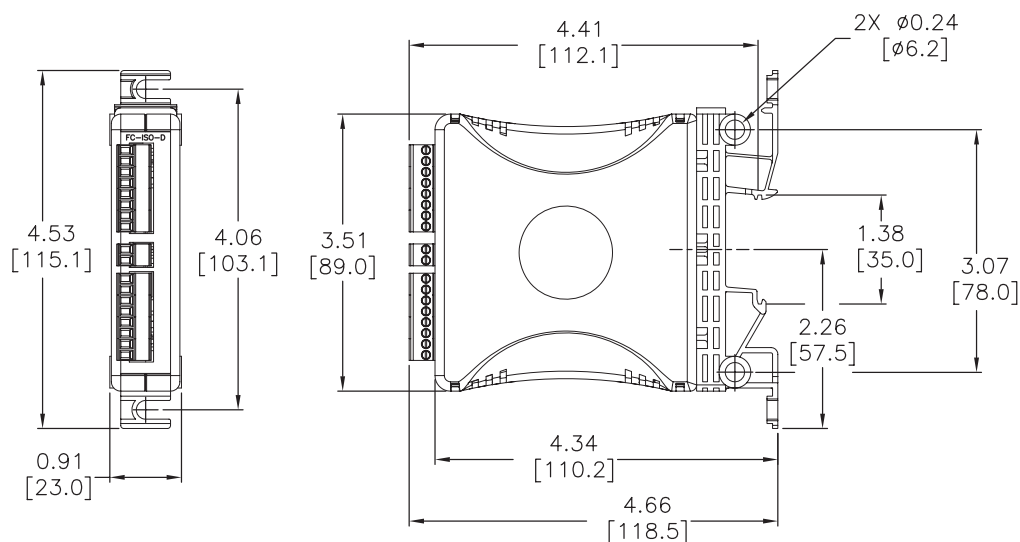

FC-ISO-D Encoder Signal Conditioner and Optical Isolator - Differential Line Driver Output

\$157.00



Overview

The FC-ISO-D high speed optical isolator module has the versatility to solve various interface problems between an incremental encoder signal and a PLC, servo drive, or other input device. Ideal for use with single-ended (open collector, NPN, pull-up, push-pull, totem pole) or differential line driver encoder signals, the three complementary inputs (A, B, Z, A-not, B-not, Z-not) are rated for 4.5-7.5 VDC and 12-26 VDC and frequency response up to 1 MHz. Input terminals A, B, and Z can be internally connected together and complementary input terminals A-not, B-not, and Z-not can be internally connected to common through DIP switches for simplified wiring.

The FC-ISO-D has three differential line driver outputs (A, B, Z, A-not, B-not, Z-not) rated for 5 VDC. Optical isolation rated at 1800V separates the input signals from the outputs. The slim-line plastic housing includes an integral 35mm DIN rail mounting adapter, LED indication, and removable screw terminal blocks for easy installation and wiring. The FC-ISO-D module is UL508 listed and CE marked.

Applications:

- Provide optical isolation between an encoder signal and PLC, servo drive, or other input device
- Solve electrically noisy signal problems
- Use as a repeater to allow longer cable runs
- Convert a single ended encoder signal to a differential line driver signal
- Convert a differential line driver encoder signal to a single-ended signal
- Change encoder signal voltage to match receiving electronics input
- Ideal for use with encoders and servo drive encoder signal inputs and outputs

Specifications		
Input Specifications		
Input Voltage (DIP selectable)	4.5-7.5 VDC	12-26 VDC
Input Current	7.5 mA typical, 14mA maximum	
Protection Type, Component	Output Short Circuit Protection, Output Current Limiting, Output Thermal Shutdown, 15kV ESD protection; Differential Driver Chip	
Switching Threshold “0” Signal	< 2.2 VDC	< 3.9 VDC
Switching Threshold “1” Signal	> 2.6 VDC	> 4.8 VDC
Output Specifications		
Output Circuit	Differential line drive; Sourcing	
Output	5VDC	
Continuous Output Current	70mA maximum	
Overcurrent Level	Limited to 70mA	
Quiescent Current	1.0 mA maximum	
Output Voltage Protection	None (not reverse polarity protected); Voltage less than -9V or greater than 14V will damage chip	
Voltage Drop at Max Continuous Current	1.75VDC	
Output Current Protection	Short Circuit, Current Limiting, Thermal Shutdown, 15kV ESD Protection	
Timing Specifications		
Input to Frequency Response Time	1.3 μs	
Output Timing Difference (Ch. to Ch. Lag)	<20ns	
Output Rise Time (t_{on})	<15ns	
Output Fall Time (t_{off})	<15ns	
Max Frequency Response	1MHz	
Terminal Block Specifications		
Number of Positions	2 pole (Dinkle: EC350V-02P), 8 pole (Dinkle: EC350V-08P)	
Wire Range	28-16 AWG Solid or Stranded Conductor; Wire strip length 5/16" (7-8mm)	
Screw Size (Slotted)	M 2.5 size, 0.4 T x 2.5 W mm (Screwdriver part number DN-SS1)	
Screw Torque	1.7 inch-pounds (0.19 Nm)	

FC-ISO-D Specifications Continued

Specifications (continued)	
General Specifications	
External DC Power Required	24VDC $\pm 10\%$ @ 105mA*
Power Dissipation Within Module	9W (all outputs at max current at max voltage)
Thermal Dissipation	30.72 BTU/hr (1W = 3.413 BTU/hr)
Isolation	1800VAC input-output applied for 1 second
Mounting	35mm DIN Rail or panel mount (with no restrictions)
Operating Temperature	0 to 60°C (32 to 140°F) IEC 60068-2-14 (Test Nb, Thermal Shock)
Storage Temperature	-20 to 70°C (-4 to 158°F) IEC 60068-2-1 (Test Ab, Cold) IEC 60068-2-2 (Test Bb, Dry Heat) IEC 60068-2-14 (Test Na, Thermal Shock)
Humidity	5 to 95% (non-condensing) IEC 60068-2-30 (Test Db, Damp Heat)
Environmental Air	No corrosive gases permitted (EN61131-2 pollution degree 1)
Vibration	MIL STD 810C 514.2 IEC 60068-2-6 (Test Fc)
Shock	MIL STD 810C 516.2 IEC 60068-2-27 (Test Ea)
Insulation Resistance	>10M Ω @ 500VDC
Noise Immunity	NEMA ICS3-304 IEC 61000-4-2 (ESD) Impulse 1000V @ 1 μ S pulse IEC 61000-4-4 (FTB) RFI, (145MHz, 440MHz 5W @ 15cm) IEC 61000-4-3 (RFI)
Agency Approvals	UL*, cUL (File # E157382), CE


*in order to comply with UL508 the supplied power must be less than 26VDC and fused at a maximum of 3 amps.

Applications

Convert a 24VDC single ended open collector encoder signal to a 5VDC differential line driver signal compatible with SureServo Input/Output Terminals (CN1).




Unit Front Face

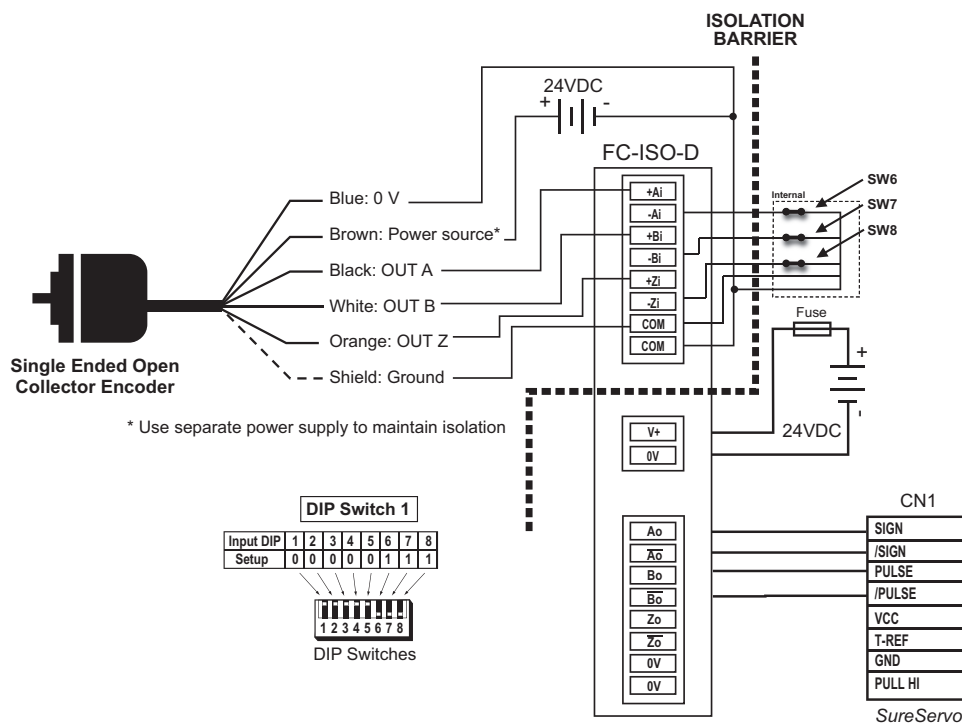

FC-ISO-D Applications and Dimensions


Applications Continued

Convert a 24VDC single-ended open-collector encoder signal to a 5VDC differential line driver signal compatible with the encoder input on a servo drive.

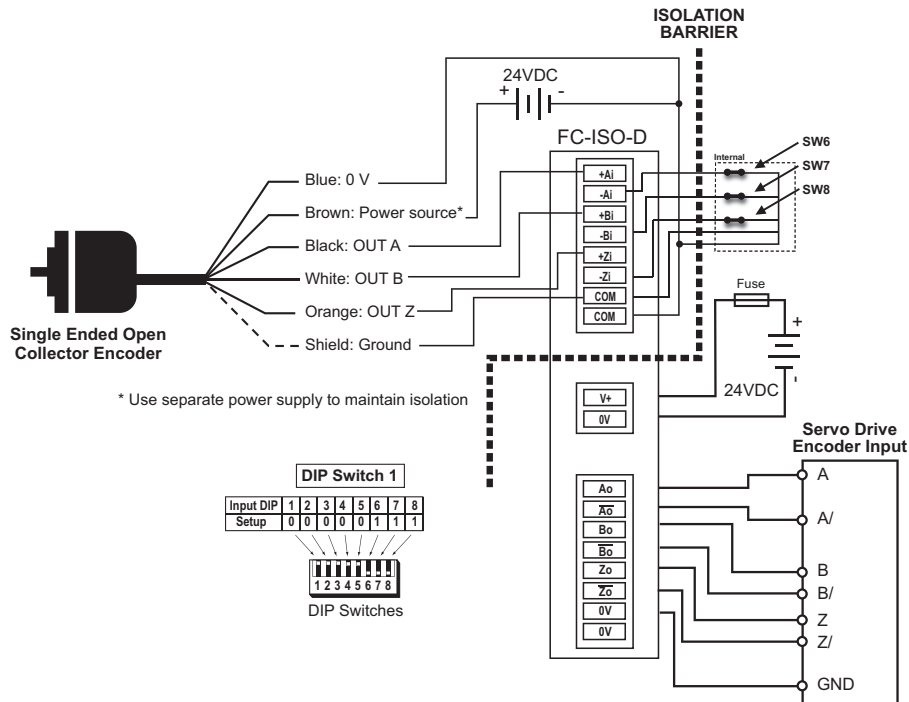

Dimensions


inches [mm]

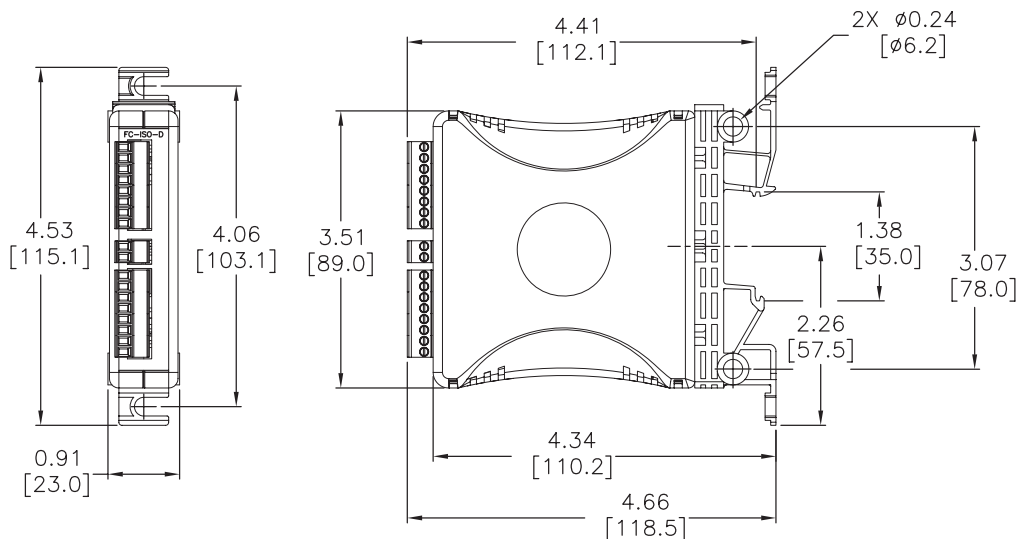

FC Series Accessories



FC-5MM

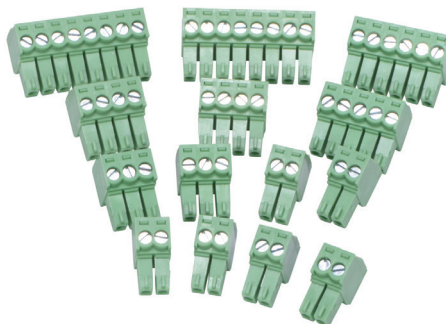

FC-35MM

Description

Universal terminal block replacements for the FC Series signal conditioners. Each package includes enough terminal blocks to replace all the terminal blocks on any FC Series signal conditioner according to the following table:

FC Series Terminal Blocks		
FC Series Model	Terminal Block Replacement Part Number	Package Includes
<u>FC-11</u>	FC-5MM	(2) 2-pole blocks (2) 3-pole blocks (1) 4-pole blocks
<u>FC-33</u>		
<u>FC-R1</u>		
<u>FC-T1</u>		
<u>FC-ISO-C</u>	FC-35MM	(6) 2-pole blocks (2) 3-pole blocks (2) 4-pole blocks (1) 5-pole blocks (1) 6-pole blocks (2) 8-pole blocks
<u>FC-ISO-D</u>		
<u>FC-B34</u>		
<u>FC-35B</u>		
<u>FC-P3</u>		
<u>FC-3RLY2</u>		
<u>FC-3RLY4</u>		

Note: Depending on the model, some terminal blocks in the package may be unused.

Universal Signal Conditioners				
Part No.	Description	Rated Torque (N·m)	Weight (Lbs)	Price
<u>FC-5MM</u>	Terminal block, replacement, 5mm. Package of 5. For use with FC Series signal conditioners.	0.5	0.1	\$18.00
<u>FC-35MM</u>	Terminal block, replacement, 3.5mm. Package of 14. For use with FC Series signal conditioners.	0.2	0.1	\$33.00