

# Gladiator GPB2 Terminal Blocks



**GPB2-115P1-6L**



**GPB2-420P1-11F**



**GPB2-175P3-6L**

## Features

- Single-pole splitter allows splitting of power main input into several outputs
- Multiple-pole assembling thanks to the interlocking function on each block
- Pre-printed block markers (L1, L2, L3, N, PE, +, -) included
- Allows grouping of several inputs into one output (solar applications)
- Reversible snap-on cover opens in two directions and facilitates identification and wiring
- Space-saving design minimizes panel space requirements
- Fast assembly time
- Modular, touch-proof design eliminates need for bus bars, isolators, fasteners, and protection screens
- Accepts aluminum and copper conductors
- 8kV rated impulse voltage
- Copper wire temperature 75°C [167°F]

## Ratings

- 1000VAC/1500VDC
- UL Flammability Rating UL 94V-0

## Agency Approvals

- UL file # E179129
- UL Flammability Rating UL 94V-0
- EU RoHS Directive 2011/65/EU
- UL 1059
- CSA file #606611



### Single pole

GPB2-80P1-4L  
7 connections



GPB2-115P1-6L  
8 connections



GPB2-160P1-6L  
8 connections



GPB2-175P1-10L  
12 connections



GPB2-255P1-11L and GPB2-335P1-11L  
12 connections



### Solar

GPB2-400P1-12L  
14 connections



### Three poles

GPB2-115P3-6L and GPB2-175P3-6L  
8x3 connections




### Flat conductor

GPB2-250P1-6F and GPB2-420P1-11F  
7 and 12 connections



### 2 in/2 out

GPB2-510P1-2L  
4 connections

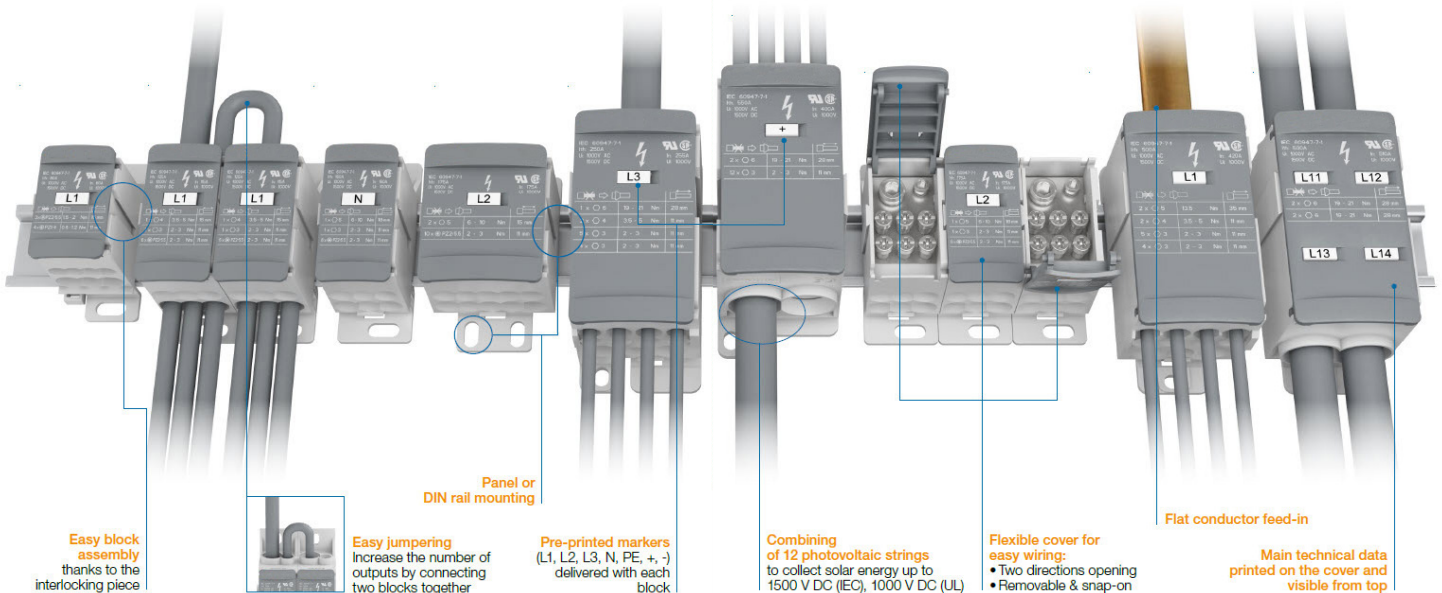

**Easy block assembly**  
thanks to the interlocking piece



**Easy jumpering**  
Increase the number of outputs by connecting two blocks together

**Pre-printed markers**  
(L1, L2, L3, N, PE, +, -) delivered with each block

**Combining of 12 photovoltaic strings**  
to collect solar energy up to 1500 V DC (IEC), 1000 V DC (UL)

**Flexible cover for easy wiring:**  
• Two directions opening  
• Removable & snap-on

**Flat conductor feed-in**

**Main technical data**  
printed on the cover and visible from top

# Gladiator GPB2 Terminal Blocks























Gladiator GPB2 Terminal Blocks Selection Table										
Part Number	Price	Type	Maximum Current Rating, IEC (Conductor Size)	Maximum Current Rating, UL (Cross Section)	SCCR	Short Time Withstand Current (IEC Rating $I_{cw}$ 1s)	Peak Withstand Current	Protection Rating	Weight (lb [g])	Drawing
<a href="#">GPB2-80P1-4L</a>	\$11.25	Single pole	Cu: 80A (16mm <sup>2</sup> ) Al: 63A (16mm <sup>2</sup> )	Cu: 80A (4 AWG)	100kA	1920A	27kA	IP20 NEMA 1	0.15 [70]	<a href="#">PDF</a>
<a href="#">GPB2-115P1-6L</a>	\$20.75	Single pole	Cu: 125A (35mm <sup>2</sup> ) Al: 100A (35mm <sup>2</sup> )	Cu: 115A (2 AWG)	100kA	4200A	30kA	IP20 NEMA 1	0.27 [122]	<a href="#">PDF</a>
<a href="#">GPB2-115P3-6L</a>	\$42.00	Three poles	Cu: 125A (35mm <sup>2</sup> ) Al: 100A (35mm <sup>2</sup> )	Cu: 115A (2 AWG)	-	4200A	30kA	IP20 NEMA 1	0.81 [367]	<a href="#">PDF</a>
<a href="#">GPB2-160P1-6L</a>	\$28.00	Single pole	Cu: 160A (70mm <sup>2</sup> ) Al: 135A (70mm <sup>2</sup> )	Cu: 160A (2/0 AWG)	100kA	6000A	30kA	IP10 NEMA 1	0.26 [120]	<a href="#">PDF</a>
<a href="#">GPB2-175P1-10L</a>	\$38.00	Single pole	Cu: 175A (70mm <sup>2</sup> ) Al: 135A (70mm <sup>2</sup> )	Cu: 175A (2/0 AWG)	100kA	6000A	30kA	IP10 NEMA 1	0.44 [200]	<a href="#">PDF</a>
<a href="#">GPB2-175P3-6L</a>	\$55.00	Three poles	Cu: 175A (70mm <sup>2</sup> ) Al: 135A (70mm <sup>2</sup> )	Cu: 175A (2/0 AWG)	-	6000A	30kA	IP10 NEMA 1	0.79 [360]	<a href="#">PDF</a>
<a href="#">GPB2-255P1-11L</a>	\$42.00	Single pole	Cu: 250A (120mm <sup>2</sup> ) Al: 200A (120mm <sup>2</sup> )	Cu: 255A (250 Kcmil)	100kA	11400A	51kA	IP10 NEMA 1	0.97 [439]	<a href="#">PDF</a>
<a href="#">GPB2-250P1-6F</a>	\$46.50	Flat conductors	Cu: (250A / Flexible busbar: 6 x 15.5 x 0.8 mm) (208A / Solid busbar: 12 x 4 mm, x2)	Cu: (250A / Flexible busbar: 6 x 15.5 x 0.8 mm) (160A / Solid busbar: 12 x 4 mm, x2)	100kA	11400A	22.8 kA	IP20 NEMA 1	0.26 [119]	<a href="#">PDF</a>
<a href="#">GPB2-335P1-11L</a>	\$47.00	Single pole	Cu: 400A (185mm <sup>2</sup> ) Al: 300A (185mm <sup>2</sup> )	Cu: 335A (400 Kcmil)	100kA	18000A	51kA	IP10 NEMA 1	0.94 [425]	<a href="#">PDF</a>
<a href="#">GPB2-400P1-12L</a>	\$35.00	Solar	Cu: 550A (2 x 95mm <sup>2</sup> )	Cu: 400A (250 Kcmil)	100kA	22800A	47.88 kA	IP10 NEMA 1	0.45 [202]	<a href="#">PDF</a>
<a href="#">GPB2-420P1-11F</a>	\$47.50	Flat conductors	Cu: 500A (Flexible busbar: 24 x 10 x 1 mm) (Solid busbar: 25 x 5 mm, x2)	Cu: 420A (24 x 10 x 1 mm)	100kA	28800A	43.9kA	IP20 NEMA 1	1.13 [514]	<a href="#">PDF</a>
<a href="#">GPB2-510P1-2L</a>	\$48.00	Two in / two out	Cu: 500A (2 x 95mm <sup>2</sup> )	Cu: 510A (2 x 250 Kcmil)	100kA	22800A	47.88 kA	IP10 NEMA 1	0.49 [224]	<a href="#">PDF</a>

Fuses					
Part Number	Over Current Protection Fuse Required Class/Max Amp Rating				SCCR, RMS Sym A (Single Phase Only)
	RK1	RK5	J	CC	
<a href="#">GPB2-80P1-4L</a>	100A	30A	110A	30A	100kA
<a href="#">GPB2-115P1-6L</a>	200A	100A	250A	30A	
<a href="#">GPB2-115P3-6L</a>					
<a href="#">GPB2-160P1-6L</a>					
<a href="#">GPB2-175P3-6L</a>					
<a href="#">GPB2-175P1-10L</a>					
<a href="#">GPB2-255P1-11L</a>	400A	200A	600A	30A	
<a href="#">GPB2-335P1-11L</a>					
<a href="#">GPB2-400P1-12L</a>					
<a href="#">GPB2-420P1-11F</a>					
<a href="#">GPB2-510P1-2L</a>	600A	200A	600A	30A	
<a href="#">GPB2-250P1-6F</a>					

Usage Conditions	
Installation Temperature Range	-5 to 40°C [23 to 104°F]
Operating Temperature Range	-55 to 110°C [-67 to 230°F]

















# Gladiator GPB2 Terminal Blocks


















from AutomationDirect







Gladiator GPB2 Terminal Blocks Wire and Torque Specifications									
Part Number	Number of Connections	Size (Ø mm [in])	Wire Type		Wire Stripping Length (mm [in])	Tool (mm [in])		Torque	
									
<u><a href="#">GPB2-80P1-4L</a></u>	Input	3	6.6 [0.26]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	2.5 to 16 mm <sup>2</sup> [14 to 4 AWG]	15 [0.59]		5.5 [0.22]	1.5 to 2 N·m [13.5 to 18 lb·in]
	Output	4	4.5 [0.18]	2.5 to 6 mm <sup>2</sup> [14 to 10 AWG]	2.5 to 6 mm <sup>2</sup> [14 to 10 AWG]	11 [0.43]		4 [0.16]	0.8 to 1.2 N·m [7.2 to 10.8 lb·in]
<u><a href="#">GPB2-115P1-6L</a></u>	Input	1	9.8 [0.39]	10 to 35 mm <sup>2</sup> [8 to 2 AWG]	10 to 35 mm <sup>2</sup> [8 to 2 AWG]	15 [0.59]		4 [0.16]	3.5 to 5 N·m [31 to 44 lb·in]
	Output	1	6.8 [0.27]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	6 to 16 mm <sup>2</sup> [10 to 6 AWG]	11 [0.43]		3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]
		6	6.4 [0.25]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]		5 [0.22]	2 to 3 N·m [18 to 26.5 lb·in]
<u><a href="#">GPB2-115P3-6L</a></u>	Input	1	9.8 [0.39]	10 to 35 mm <sup>2</sup> [8 to 2 AWG]	10 to 35 mm <sup>2</sup> [8 to 2 AWG]	15 [0.59]		4 [0.16]	3.5 to 5 N·m [31 to 44 lb·in]
	Output	1	6.8 [0.27]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	6 to 16 mm <sup>2</sup> [10 to 6 AWG]	11 [0.43]		3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]
		6	6.4 [0.25]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]		5 [0.22]	2 to 3 N·m [18 to 26.5 lb·in]
<u><a href="#">GPB2-160P1-6L</a></u>	Input	1	11.8 [0.46]	16 to 50 mm <sup>2</sup> [6 to 1/0 AWG]	16 to 70 mm <sup>2</sup> [6 to 2/0 AWG]	18 [0.71]		5 [0.20]	6 to 10 N·m [53 to 88 lb·in]
	Output	1	6.8 [0.27]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	6 to 16 mm <sup>2</sup> [10 to 6 AWG]	11 [0.43]		3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]
		6	6.4 [0.25]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]		5.5 [0.22]	2 to 3 N·m [18 to 26.5 lb·in]
<u><a href="#">GPB2-175P1-10L</a></u>	Input	2	11.8 [0.46]	10 to 50 mm <sup>2</sup> [8 to 1/0 AWG]	10 to 70 mm <sup>2</sup> [6 to 2/0 AWG]	15 [0.71]		5 [0.20]	6 to 10 N·m [53 to 88 lb·in]
	Output	10	6.4 [0.25]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]		5.5 [0.22]	2 to 3 N·m [18 to 26.5 lb·in]
<u><a href="#">GPB2-175P3-6L</a></u>	Input	1	11.8 [0.46]	16 to 50 mm <sup>2</sup> [6 to 1/0 AWG]	16 to 70 mm <sup>2</sup> [6 to 2/0 AWG]	18 [0.71]		5 [0.20]	6 to 10 N·m [53 to 88 lb·in]
	Output	1	6.8 [0.27]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	6 to 16 mm <sup>2</sup> [10 to 6 AWG]	11 [0.43]		3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]
		6	6.4 [0.25]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]		5.5 [0.22]	2 to 3 N·m [18 to 26.5 lb·in]


# Gladiator GPB2 Terminal Blocks



Gladiator GPB2 Terminal Blocks Wire and Torque Specifications									
Part Number	Number of Connections	Size (Ø mm [in])	Wire Type		Wire Stripping Length (mm [in])	Tool (mm [in])		Torque	
									
<b>GPB2-255P1-11L</b>	Input	1	15.3 [0.60]	35 to 95 mm <sup>2</sup> [2 to 3/0 AWG]	35 to 120 mm <sup>2</sup> [2 to 250 Kcmil]	28 [1.10]	 5.5 [0.22]	19 to 21 N·m [168 to 185 lb·in]	
		2	8.7 [0.34]	2.5 to 25 mm <sup>2</sup> [14 to 4 AWG]	2.5 to 35 mm <sup>2</sup> [14 to 2 AWG]	11 [0.43]	 4 [0.16]	3.5 to 5 N·m [31 to 44 lb·in]	
	Output	5	6.4 [0.25]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]	 3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]	
		4	5.7 [0.22]	2.5 to 10 mm <sup>2</sup> [14 to 8 AWG]	2.5 to 10 mm <sup>2</sup> [14 to 8 AWG]	11 [0.43]	 3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]	
<b>GPB2-335P1-11L</b>	Input	1	18.8 [0.74]	95 to 150 mm <sup>2</sup> [3/0 to 300 Kcmil]	95 to 185 mm <sup>2</sup> [3/0 to 400 Kcmil]	28 [1.10]	 8 [0.31]	25 N·m [221 lb·in]	
		2	8.7 [0.34]	2.5 to 25 mm <sup>2</sup> [14 to 4 AWG]	2.5 to 35 mm <sup>2</sup> [14 to 2 AWG]	11 [0.43]	 4 [0.16]	3.5 to 5 N·m [31 to 44 lb·in]	
	Output	5	6.4 [0.25]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]	 3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]	
		4	5.7 [0.22]	2.5 to 10 mm <sup>2</sup> [14 to 8 AWG]	2.5 to 10 mm <sup>2</sup> [14 to 8 AWG]	11 [0.43]	 3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]	
<b>GPB2-400P1-12L</b>	Input	2	15.5 [0.59]	25 to 95 mm <sup>2</sup> [4 to 3/0 AWG]	25 to 120 mm <sup>2</sup> [4 to 250 Kcmil]	28 [1.1]	 6 [0.24]	19 to 21 N·m [168 to 185 lb·in]	
	Output	12	6.6 [0.26]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]	 3 [0.19]	2 to 3 N·m [18 to 26.5 lb·in]	
<b>GPB2-510P1-2L</b>	Input	2	15.5 [0.59]	25 to 95 mm <sup>2</sup> [4 to 3/0 AWG]	25 to 120 mm <sup>2</sup> [4 to 250 Kcmil]	28 [1.1]	 6 [0.24]	19 to 21 N·m [168 to 185 lb·in]	
	Output	2	15.5 [0.59]	25 to 95 mm <sup>2</sup> [4 to 3/0 AWG]	25 to 120 mm <sup>2</sup> [4 to 250 Kcmil]	28 [1.1]	 6 [0.24]	19 to 21 N·m [168 to 185 lb·in]	

Gladiator GPB2 Terminal Blocks (Flat Entry) Wire and Torque Specifications									
Part Number	Number of Connections	Size (mm [in])	Wire Type			Wire Stripping Length (mm [in])	Tool (mm [in])	Torque	
									
<b>GPB2-250P1-6F</b>	Input	1	15.5 x 7.5 [0.59 x 0.28]	12 x 4 mm [8 to 2 AWG]		3 x 9 x 0.8 mm to 6 x 15.5 x 0.8 mm	15 [0.59]	 5 [0.20]	13.5 N·m [120 lb·in]
	Output	6	6.6 [0.26]	 2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]		2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]	 5.5 [0.22]	2 to 3 N·m [18 to 26.5 lb·in]
<b>GPB2-420P1-11F</b>	Input	1	20 x 10.8 [1.02 x 0.43 in]	12 x 4 mm up to (2x) 25 x 5 mm		3 x 9 x 0.8 mm to 6 x 15.5 x 0.8 mm	35 [1.38]	 5 [0.20]	13.5 N·m [119.5 lb·in]
		2	8.69 [0.34]	2.5 to 25 mm <sup>2</sup> [14 to 4 AWG]		2.5 to 35 mm <sup>2</sup> [14 to 2 AWG]	11 [0.43]	 4 [0.16]	3.5 to 5 N·m [31 to 44 lb·in]
	Output	4	5.7 [0.22]	2.5 to 10 mm <sup>2</sup> [14 to 8 AWG]		2.5 to 10 mm <sup>2</sup> [14 to 8 AWG]	11 [0.43]	 3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]
		5	6.59 [0.26]	2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]		2.5 to 16 mm <sup>2</sup> [14 to 6 AWG]	11 [0.43]	 3 [0.12]	2 to 3 N·m [18 to 26.5 lb·in]

Wiring Specifications					
					
<b>NOT ALLOWED:</b> Flexible without ferrule (IEC V-K & UL: Class 5/6)	Flexible with insulated ferrule (IEC V-K & UL: Class 5/6)	Rigid solid (IEC V-U Class 1, UL solid)	Rigid stranded (IEC V-R Class 2, UL Class B/C)	Solid busbar	Flexible busbar



# Gladiator GPB1 Terminal Blocks



**GPB1-85P1-15S**

## Features

- Single-pole 7, 15 and 16 connections
- Push-in and spring technology
- Three mounting options: horizontal DIN rail, vertical DIN rail, or panel mount with screws
- Pre-printed block markers (L1, L2, L3, N, PE, +, -, red, blue and green) included
- Increased wiring visibility due to in-line connection and front access
- Hands-free wiring with or without screwdriver
- Compatible with KN-EB4 end brackets
- Built-in voltage test point
- Push-in connections save installation time
- Modular, touch-proof design reduces the need for bus bars, isolators, fasteners, and protection screens
- Copper wire temperature 75°C [167°F]

## Ratings

- Up to 130A, 1000VAC/1500VDC
- UL Flammability Rating UL 94V-0

## Agency Approvals

- UL file # E179129
- EU RoHS Directive 2011/65/EU
- UL 1059
- CSA file # 606611



Gladiator GPB1 Terminal Blocks Selection Table														
Part Number	Price	Rated Current and Voltage (IEC)	Rated Current and Voltage (UL)	Rated Cross Section								Protection Rating	Weight (lb [g])	Drawing
				Flexible Without Ferrule		Flexible With Insulated Ferrule		Flexible With Twin Ferrule		Rigid Solid or Stranded				
				#	mm <sup>2</sup>	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG			
				Diagram		Diagram		Diagram		Diagram				
<a href="#">GPB1-85P1-7S</a>	\$11.50	76A 1000VAC 1500VDC	85A 1000V	Diagram		Diagram		Diagram		Diagram		IP20	0.15 [68]	<a href="#">PDF</a>
				3	1.5-16	1.5-16	16-6	1.5-6	16-10	1.5-25	16-4			
<a href="#">GPB1-85P1-15S</a>	\$16.00	76A 1000VAC 1500VDC	85A 1000V	Diagram		Diagram		Diagram		Diagram		IP20	0.30 [136.1]	<a href="#">PDF</a>
				3	1.5-16	1.5-16	16-6	1.5-6	16-10	1.5-25	16-4			
<a href="#">GPB1-130P1-16S</a>	\$25.50	125A 1000VAC 1000VDC	130A 600V	Diagram		Diagram		Diagram		Diagram		IP20	0.40 [181.4]	<a href="#">PDF</a>
				2*	10-35	10-35	8-1	N/A	N/A	10-35	8-1			
				2	1.5-16	1.5-16	16-6	1.5-6	16-10	1.5-16	16-6			
				12	1.5-10	1.5-10	16-8	1.5-4	16-12	1.5-16	16-6			

\* The 2x10 35mm<sup>2</sup> connections (located on the left side) utilize screw clamp technology.

Gladiator GPB1 Terminal Blocks Mounting and Torque		
Rail		TH 35-7.5 TH 35-15
Wire Stripping Length		Screw connection: 17mm [0.67 in]
		PI-Spring connection: 15mm [0.591 in]
<b>Tool</b>		
For Screw Connection		Allen key Ø 4mm Ø 0.157 in
For PI-Spring Connection (Tool for installation and removal of wires without ferrule)		Flat screwdriver Ø 4mm Ø 0.157
<b>Torque</b>		
25-35 mm <sup>2</sup> (4-1 AWG)		3.5-4 N·m [31-35.4 lb·in]
16 mm <sup>2</sup> (6 AWG)		3-3.5 N·m [26.5-35.4 lb·in]
10 mm <sup>2</sup> (8 AWG)		3-3.5 N·m [26.5-35.4 lb·in]

Usage Conditions	
Installation Temperature Range	-5 to 40°C [23 to 104°F]
Operating Temperature Range	-55 to 110°C [-67 to 230°F]

Fuses				SCCR, RMS Sym A (Single Phase Only)
Over Current Protection Fuse Required Class/Max Amp Rating				
RK1	RK5	J	CC	100kA
200A	60A	200A	30A	