1-800-633-0405 **IDEM MPR and MMR** Light Duty Non-Contact Magnetic Safety Switches





Actuator Operating Direction



MPR/MMR

MPR Series Plastic Housing

MMR Series Stainless Steel Housing

- Compact yet robust fitting suitable for all small guard applications
- · Can be mounted unobtrusively in channels or behind doors - left or right cable exit
- · Hygenic screw cap covers ensure suitability for food processing washdown
- Can be high-pressure hosed at high temperature - IP69K rated
- · Wide 12 mm sensing, high tolerance to misalignment
- High switching capability up to 0.5A
- Will operate with most safety relays
- Available with 2m, 5m, or 10m cable or 250mm pigtail cable with quick-disconnect cable
- · Codes are not unique and can be used with other models of the same series

MMR-H Series Only

- Specifically designed for food processing applications
- Suitable for CIP SIP cleaning Food Splash Zones per EHEDG guidelines
- 316 Stainless Steel mirror polished finish (Ra4)
- Can be high-pressure hosed at high temperature - IP69k rated

See Dimensions later in this section.

MPR/MMR Non-Contact Magnetic Safety Switches					
Part Number	Price	Body Material	Cable Length / Exit Type	Circuits	Contact Type / Rating
			Pigtail Versions		
<u>MPR-114005</u>	\$90.00	Plastic	2m / Right	2 NC, 1 NO	Light duty / 0.5A
<u>MPR-114006</u>	\$99.00		5m / Right		
<u>MPR-114007</u>	\$115.00		10m / Right		
<u>MPR-114013</u>	\$90.00		2m / Left		
<u>MPR-114014</u>	\$99.00		5m / Left		
<u>MPR-114015</u>	\$115.00		10m / Left		
<u>MMR-H-131005</u>	\$176.00	- Stainless Steel	2m / Right		
<u>MMR-H-131006</u>	\$186.00		5m / Right		
<u>MMR-H-131007</u>	\$203.00		10m / Right		
<u>MMR-H-131013</u>	\$176.00		2m / Left		
<u>MMR-H-131014</u>	\$186.00		5m / Left		
<u>MMR-H-131015</u>	\$203.00		10m / Left		
		Quick Disc	connect Versions (M12 8-pin)		
MPR-114008	\$122.00		250mm / Right	2 NC, 1 NO	Light duty.0.5A
<u>MPR-114016</u>	\$122.00	Plastic	250mm / Left		
MMR-H-131008	\$210.00		250mm / Right		
MMR-H-131016	\$210.00	Stainless Steel	250mm / Left		

Female Quick Disconnect Lead				
Part Number	nber Price Description		Exit Type/Cable Length	
<u>140101</u>	\$60.00	Famala OD I and	M12 Female 5m, 8-pin	
<u>140102</u>	\$91.00	Female QD Lead	M12 Female 10m, 8-pin	




1-800-633-0405 **IDEM MPR and MMR** Light Duty Non-Contact Magnetic Safety Switches

Dimensions

mm [in]

MMR Series

Right Pigtail

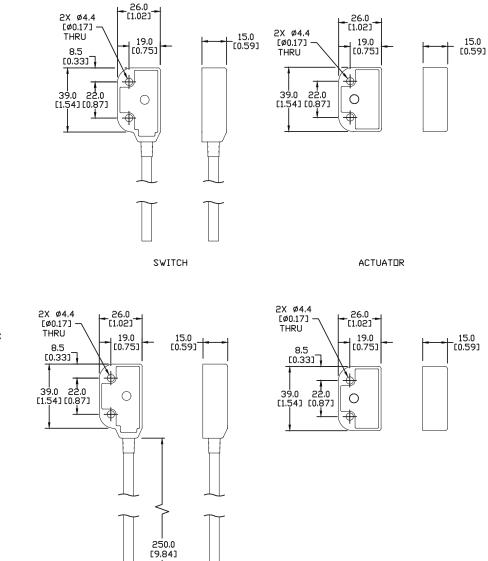

Right Quick Disconnect

See our website: www.AutomationDirect.com for complete Engineering drawings.

SWITCH

8 PIN, M12 QUICK DISCONNECT

ACTUATOR


1-800-633-0405 **IDEM MPR and MMR** Light Duty Non-Contact Magnetic Safety Switches


Dimensions

mm [in]

MMR Series

Left Pigtail

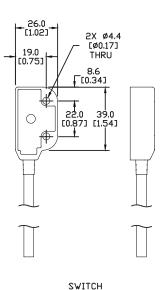



ACTUATER

⊌

2X Ø4.4


[Ø0.17]

THRU

22.0 39.0 [0.87][1.54]

ACTUATOR

_ 15.0 [0.59]

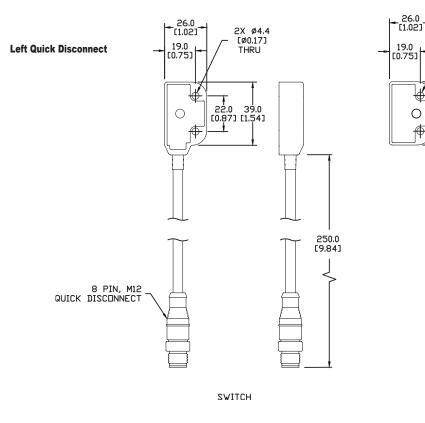


See our website: www.AutomationDirect.com for complete Engineering drawings.

IDEM Non-Contact Safety Switches Electrical Connections and Dimensions


Electrical Connections

Magnetic Switches

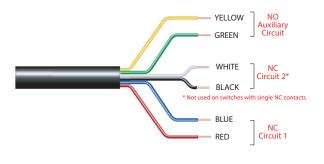


Magnetic Switches - Electrical Connections			
Quick Disconnect Connector Pin Out	Lead Color	Type of Circuit (Actuator Present)	
4	Yellow	Auxiliary (NO)	
6	Green	Auxiliary (NO)	
7	Black	NC2	
1	White	NC2	
2	Red	NC1	
3	Blue	NC1	

Coded Magnetic and RFID Switches

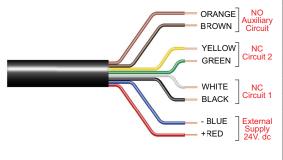

Coded Magnetic Switches - Electrical Connections				
Quick Disconnect Connector Pin Out	Lead Color	Type of Circuit (Actuator Present)	Output Types (Solid State)	
8	Orange	Auxiliary (NO)	200 mA max. 24 VDC	
5	Brown	Auxiliary (NO)		
4	Yellow	NC2 +	200 mA max. 24 VDC (Optocoupler)	
6	Green	NC2 -		
7	Black	NC1 +	200 mA max. 24 VDC (Optocoupler)	
1	White	NC1 -		
2	Red	Supply +24 VDC	Supply 24 VDC +10% / -15%	
3	Blue	Supply 0VDC		

Connection Colors




Pin View from Switch M12 Male

1-800-633-0405 **IDEM Non-Contact Safety Switches Specifications**

	Non-Contact Magnetic Switches	tches Specifications Non-Contact Coded Magnetic Switches	Non-Contact RFID Coded Switches	
Safety Classification and Reliability Data	Non-Comact magnetic Owneres	Non-comaci coucu magnetic ownenes	Non-Comact III ID Coucu Ownered	
Switching Reliability (B10d)	3.3 x 10 ⁶ operations at 100mA load	No mochanical parts implemented	No mochanical parts implemented	
	3.3 x 10 ⁶ operations at 100mA load No mechanical parts implemented		No mechanical parts implemented	
ISO 13849-1	Up to Category 4			
ISO 13849-1	Up to PLe depending upon system architecture			
EN 62061	Up to SIL3 depending upon system architecture			
Safety Data - Annual Usage	o o	8 cycles per hour / 24 hours per day / 365 days	· · · 0 10	
PFHd	2.8 x 10 ⁻¹⁰	2.6 x 10 ⁻¹⁰	4.77 x 10 ⁻¹⁰	
Proof Test Interval (Life)		20 years	1	
MTTFd	470 years	866 years	1100 years	
Agency Approvals		CE, cULus		
Electrical and General Specifications			1	
	MPR: Voltage free: 250VAC, 0.5 A max.		24VDC, 0.2 A max (optocoupler)	
	LPR, LMR, SPR, SMR, SMR-F: Voltage free: 250VAC, 1.0 A max.			
Contact Ratings: Safety Contact NC	CPR, CMR, CMR-F, WPR: Voltage free: 250VAC, 2.0 A max.	24VDC, 0.2 A max (optocoupler)		
	BPR, BMR: 240VAC, 24VAC/DC, 1.0 A max.			
Contact Ratings: Monitoring (Auxilary) Contact NO	Voltage free: 24VDC, 0.2 A max.	24VDC, 0.2A max.	24VDC, 0.2A max.	
	MPR: Fuse externally 0.4 A (F)			
Recommended Fuere (NC Circuite)	LPR, LMR, SPR, SMR, SMR-F, CMR, CMR-F: Fuse externally 0.8 A (F)	NA		
Recommended Fuses (NC Circuits)	CPR, WPR: Fuse externally 1.6 A (F)		NA	
	BPR, BMR: Fuse externally 0.5 A (F)			
Contact Release Time	<2ms	NA	NA	
Initial Contact Resistance	<0.5 Ω	NA	NA	
Minimum Switched Current		10 DC, 1mA		
Dielectic Withstand		250VAC		
Insulation Resistance		100 Megohms		
Recommended Setting Gap		5mm [0.20 in]		
NC Switching Distance	Sao (assured C	DN) 8mm [0.31 in] close; Sar (assured OFF) 20mi	m [0.79 in] open	
NC Switching Operation	· · · · · · · · · · · · · · · · · · ·	circuits are closed when the guard is closed and		
NO Switching Operation		Opens before NC circuits close		
Tolerance to Misalignment	5mm [0.20 in] in any direction from 5mm [0.20 in] setting gap (See Misalignment Range drawing on this page)			
Switching Frequency	1.0 Hz Max.			
Approach Speed	200mm [7.87 in] per minute to 1000mm [39.37] per second			
Body Material - Polyester	CPR, LPR, MPR, SPR, WPR, BPR	CPC, LPC, MPC, SPC, WPC	LPF, SPF, BPF	
Body Material - 316 Stainless Steel	CMR, CMR-F, LMR, SMR, SMR-F, BMR	CMC, CMC-F, LMC, SMC, SMC-F	LMF, BMF	
	Polyester: -25° to +80°C (-13° to +176° F)			
Operating Temperature Range	316 Stainless Steel: -25° to +105° C [-13° to +221° F]	316 Stainless Steel: -25° to +105° C [-13° to +221° F]	-25° to +80° C [-13° to +176° F]	
Storage Temperature (Low)	L 3	-55° to -40° C [-67° to -40° F]		
Enclosure Protection	IP	267, IP69K (QC versions are IP67 due to connect	or)	
Shock Resistance		IEC 68-2-27 11ms 30g	- /	
Vibration Resistance	IEC 68-2-6 10-55 Hz 1mm [0.04 in]			
Cable Type	PVC, 6.5 mm outside diameter max.	PVC, 6.5 mm outside diameter max.	PVC, 6mm [0.24 in] outer diameter max.	

Note: Always mount onto non-ferrous materials.



Misalignment Range

TING GAP:

Safety Products



Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.

AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.