
1-800-633-0405 **IDEM SPF Non-Contact RFID Coded Safety Switches**



SPF Series Plastic Housing

- RFID coded actuation
- Switching capability up to 0.2A
- Can be high-pressure hosed at high temperature - IP69K rated
- Will operate with most safety relays
- Available with 2m, 5m, or 10m cable or 250mm pigtail with quick-disconnect cable See Dimensions later in this section.





SPF Non-Contact RFID Coded Safety Switches						
Part Number	Price	Body Material	Coding	Cable Length	Circuits	Contact Rating
Pigtail Versions						
SPF-U-405001	\$137.00	- - Plastic -	Unique	2m	2 NC, 1 NO	0.2A
SPF-U-405002	\$156.00			5m		
SPF-U-405003	\$172.00			10m		
SPF-M-405101	\$137.00		Master	2m		
SPF-M-405102	\$156.00			5m		
SPF-M-405103	\$172.00			10m		
Quick Disconnect Versions (M12 8-pin)						
SPF-U-405004	\$179.00	Plastic	Unique	250mm	2 NC, 1 NO	0.2A
SPF-M-405104	\$179.00		Master			

Replacement Actuators for SPF Master Units						
Part Number	Price	Body Material	Coding	Cable Length	Circuits	Contact Rating
SPF-M-405201	\$36.50	Plastic	Master	-	2 NC, 1 NO	0.2A

Female Quick Disconnect Lead				
Part Number Price		Description	Exit Type/Cable Length	
<u>140101</u>	\$60.00		M12 Female 5m, 8-pin	
<u>140102</u>	\$91.00	Female QD Lead	M12 Female 10m, 8-pin	




1-800-633-0405 **IDEM SPF Non-Contact RFID Coded Safety Switches**

Dimensions

mm [in]

SPF Series

Pigtail

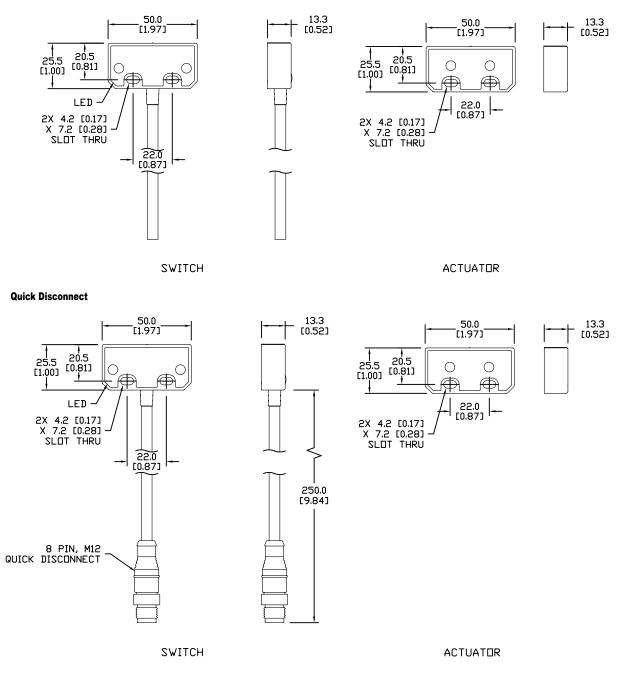


See our website: www.AutomationDirect.com for complete Engineering drawings.

IDEM Non-Contact Safety Switches Electrical Connections and Dimensions


Electrical Connections

Magnetic Switches

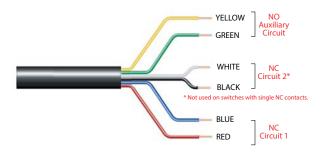


Magnetic Switches - Electrical Connections				
Quick Disconnect Connector Pin Out	Lead Color	Type of Circuit (Actuator Present)		
4	Yellow	Auxiliary (NO)		
6	Green	Auxiliary (NO)		
7	Black	NC2		
1	White	NC2		
2	Red	NC1		
3	Blue	NC1		

Coded Magnetic and RFID Switches

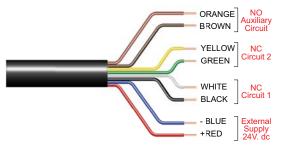

Coded Magnetic Switches - Electrical Connections					
Quick Disconnect Connector Pin Out	Lead Color	Type of Circuit (Actuator Present)	Output Types (Solid State)		
8	Orange	Auxiliary (NO)	200 mA max. 24 VDC		
5	Brown	Auxiliary (NO)			
4	Yellow	NC2 +	200 mA max. 24 VDC		
6	Green	NC2 -	(Optocoupler)		
7	Black	NC1 +	200 mA max. 24 VDC (Optocoupler)		
1	White	NC1 -			
2	Red	Supply +24 VDC	Supply 24 VDC		
3	Blue	Supply 0VDC	+10% / -15%		

Connection Colors




Pin View from Switch M12 Male

1-800-633-0405 **IDEM Non-Contact Safety Switches Specifications**

	Non-Contact Magnetic Switches	tches Specifications	Non-Contact RFID Coded Switche	
Safety Classification and Reliability Data	Non-Comaci magnetic Switches	Non-Contact Coded Magnetic Switches	Non-Comaci RFID Coded Switche	
	2.2.406	No. and the sheet of the device of all	No	
Switching Reliability (B10d)	3.3 x 10 ⁶ operations at 100mA load No mechanical parts implemented		No mechanical parts implemented	
SO 13849-1	Up to Category 4			
SO 13849-1	Up to PLe depending upon system architecture			
EN 62061	Up to SIL3 depending upon system architecture			
Safety Data - Annual Usage	10	8 cycles per hour / 24 hours per day / 365 days	10	
PFHd	2.8 x 10 ⁻¹⁰	2.6 x 10 ⁻¹⁰	4.77 x 10 ⁻¹⁰	
Proof Test Interval (Life)		20 years	1	
MTTFd	470 years	866 years	1100 years	
Agency Approvals	CE, cULus			
Electrical and General Specifications				
	MPR: Voltage free: 250VAC, 0.5 A max.		24VDC, 0.2 A max (optocoupler)	
	LPR, LMR, SPR, SMR, SMR-F: Voltage free: 250VAC, 1.0 A max.	24VDC, 0.2 A max (optocoupler)		
Contact Ratings: Safety Contact NC	CPR, CMR, CMR-F, WPR: Voltage free: 250VAC, 2.0 A max.			
	BPR, BMR: 240VAC, 24VAC/DC, 1.0 A max.			
Contact Ratings: Monitoring (Auxilary) Contact NO	Voltage free: 24VDC, 0.2 A max.	24VDC, 0.2A max.	24VDC, 0.2A max.	
Recommended Fuses (NC Circuits)	MPR: Fuse externally 0.4 A (F) LPR, LMR, SPR, SMR, SMR-F, CMR, CMR-F: Fuse externally 0.8 A (F)	NA	NA	
	CPR, WPR: Fuse externally 1.6 A (F) BPR, BMR: Fuse externally 0.5 A (F)			
Contact Release Time	<2ms	NA	NA	
nitial Contact Resistance	<0.5 Ω	NA	NA	
Minimum Switched Current		10 DC, 1mA		
Dielectic Withstand		250VAC		
Insulation Resistance		100 Megohms		
Recommended Setting Gap		5mm [0.20 in]		
NC Switching Distance	Sao (assured C	DN) 8mm [0.31 in] close; Sar (assured OFF) 20mr	m [0,79 in] open	
NC Switching Operation		circuits are closed when the guard is closed and		
NO Switching Operation		Opens before NC circuits close		
Tolerance to Misalignment	5mm [0.20 in] in any direction from 5mm [0.20 in] setting gap (See Misalignment Range drawing on this page)			
Switching Frequency		1.0 Hz Max.		
Approach Speed	200n	nm [7.87 in] per minute to 1000mm [39.37] per se	acond	
Body Material - Polyester	CPR, LPR, MPR, SPR, WPR, BPR	CPC, LPC, MPC, SPC, WPC	LPF, SPF, BPF	
Body Material - 316 Stainless Steel	CMR, CMR-F, LMR, SMR, SMR-F, BMR	CMC, CMC-F, LMC, SMC, SMC-F	LMF, BMF	
	Dimit	Polyester: -25° to +80°C (-13° to +176° F)	1	
Operating Temperature Range	316 Stainless Steel: -25° to +105° C [-13° to +221° F]	316 Stainless Steel: -25° to +105° C [-13° to +221° F]	-25° to +80° C [-13° to +176° F]	
Storage Temperature (Low)		-55° to -40° C [-67° to -40° F]	1	
Enclosure Protection	q	67, IP69K (QC versions are IP67 due to connecte	 or)	
Shock Resistance	П	IEC 68-2-27 11ms 30g		
Vibration Resistance				
Cable Type	PVC, 6.5 mm outside diameter max.	IEC 68-2-6 10-55 Hz 1mm [0.04 in] PVC, 6.5 mm outside diameter max.	PVC, 6mm [0.24 in] outer diameter	
••	2 x M4; Tightening torque: 1.0 N•m [0.74 lb•ft]			

Note: Always mount onto non-ferrous materials.



Misalignment Range

TING GAP: 5n

Safety Products



Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.

AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.