



# DW Series 18mm Stainless Steel Triple Sensing Proximity Sensors



## M18 (18mm) Stainless Steel – DC

- 18mm threaded triple distance proximity sensor
- 20mm sensing
- Complete overload protection
- IP68/IP69k rated
- Two M18 lock nuts included
- Stainless steel construction
- One-piece for harsh duty applications
- LED status indicator
- Lifetime warranty



### DW Series 18mm Stainless Steel Triple Distance Inductive Proximity Selection Chart

Part Number	Price	Size	Sensing Range	Mounting	Output State	Logic	Connection	Wiring	Dimensions
<b>Triple Distance</b>									
<a href="#"><u>DW-AD-711-M18</u></a>	\$109.00	M18	20mm [0.787 in]	Non-flush	N.O.	NPN	2m [6.5 ft] axial cable	Diagram 1	Figure 1
<a href="#"><u>DW-AD-713-M18 *</u></a>	\$109.00				N.O.	PNP	2m [6.5 ft] axial cable	Diagram 2	Figure 1
<a href="#"><u>DW-AS-711-M18-002</u></a>	\$109.00				N.O.	NPN	M12 quick-disconnect	Diagram 3	Figure 2
<a href="#"><u>DW-AS-713-M18-002 *</u></a>	\$109.00				N.O.	PNP	M12 quick-disconnect	Diagram 4	Figure 2
<a href="#"><u>DW-AD-712-M18</u></a>	\$109.00				N.C.	NPN	2m [6.5 ft] axial cable	Diagram 1	Figure 1
<a href="#"><u>DW-AD-714-M18</u></a>	\$109.00				N.C.	PNP	2m [6.5 ft] axial cable	Diagram 2	Figure 1
<a href="#"><u>DW-AS-714-M18-002</u></a>	\$109.00				N.C.	PNP	M12 quick-disconnect	Diagram 4	Figure 2

\*IO-Link model

## Wiring Diagrams

Diagram 1

NPN Cable

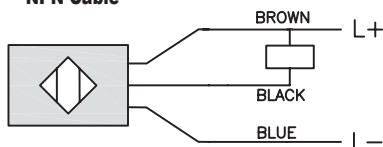


Diagram 2

PNP Cable




Diagram 3

NPN Connector


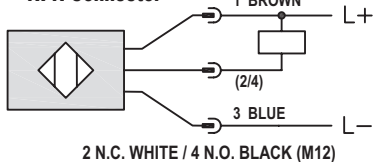



Diagram 4

PNP Connector

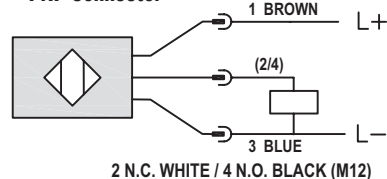

## Connectors

M12 connector





# DW Series 18mm Stainless Steel Triple Sensing Proximity Sensors

DW Series 18mm Stainless Steel Triple Distance Inductive Proximity Specifications	
<b>Specifications</b>	<b>DW-Ax-71x-M18</b>
<b>Mounting Type</b>	Non-flush
<b>Nominal Sensing Distance</b>	20mm [0.787 in]
<b>Operating Distance</b>	—
<b>Material Correction Factors</b>	See the <a href="#">Material influence table</a>
<b>Output Type</b>	NPN or PNP, N.O. or N.C.
<b>Operating Voltage</b>	10 to 30 VDC
<b>No-load Supply Current</b>	≤ 10mA
<b>Operating (Load) Current</b>	≤ 200mA
<b>Off-state (Leakage) Current</b>	≤ 0.1 mA
<b>Voltage Drop</b>	≤ 2 V
<b>Switching Frequency</b>	≤ 200 Hz
<b>Differential Travel (% of Nominal Distance)</b>	≤ 10%
<b>Repeat Accuracy</b>	0.60 mm
<b>Ripple</b>	≤ 20%
<b>Time Delay Before Availability (tv)</b>	≤ 15ms
<b>Reverse Polarity Protection</b>	Yes
<b>Short-Circuit Protection</b>	Yes
<b>Operating Temperature</b>	-25 to 85°C [-13 to 185°F]
<b>Protection Degree (DIN 40050)</b>	IP68, IP69K
<b>Indication/Switch Status</b>	Yellow LED
<b>Housing Material</b>	Stainless steel
<b>Sensing Face Material</b>	Stainless steel
<b>Shock/Vibration</b>	IEC 60947-5-2/7.4
<b>Tightening Torque</b>	—
<b>Weight</b>	112g [3.95 oz], 51g [1.80 oz]
<b>Connection</b>	2m [6.5 ft] cable, M12 connection
<b>IO-Link</b>	PNP/N.O. version only
<b>Agency Approvals</b>	CE, cULus E239373

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page

## Dimensions

mm [inches]

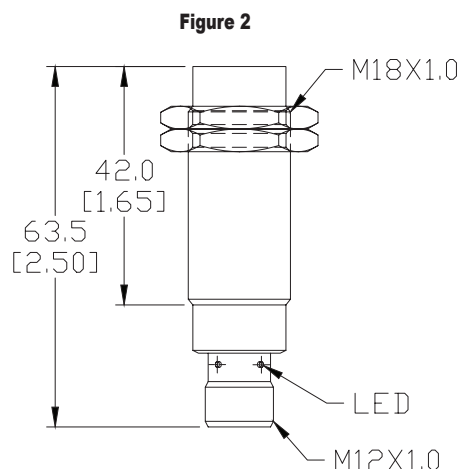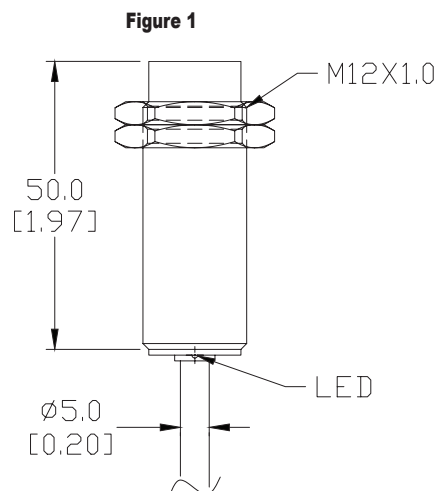

See our website [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

# Accessories for 18mm Sensors

## Axial Mounting Bracket

Axial mounting bracket available in zinc plated steel or 316L stainless steel. Has two mounting holes (use 4mm screws) and allows for rotation of an optical axis for right-beam-angle-adaptor sensors. Hexagonal nuts not included. For use with 18mm sensors.

Accessories for 18mm Sensors			
Part Number	Price	Description	Weight lb [g]
<a href="#"><u>ST18A</u></a>	\$2.00	Micro Detectors mounting bracket, axial, zinc plated steel. For use with 18mm sensors.	0.06 [27.2]
<a href="#"><u>ST18A7W</u></a>	\$7.25	Micro Detectors mounting bracket, axial, 316L stainless steel. For use with 18mm sensors.	0.06 [27.2]



**ST18A**

## Dimensions

mm [inches]



## Right-angle Mounting Bracket

Right-angle mounting bracket for use with 18mm sensors. Has two mounting holes (use 4mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal nuts not included.

Accessories for 18mm Sensors			
Part Number	Price	Description	Weight lb [g]
<a href="#"><u>ST18C</u></a>	\$2.00	Micro Detectors mounting bracket, right-angle, zinc plated steel. For use with 18mm sensors.	0.06 [27.2]
<a href="#"><u>ST18C7W</u></a>	\$7.25	Micro Detectors mounting bracket, right-angle, 316L stainless steel. For use with 18mm sensors.	0.06 [27.2]



**ST18C**

## Dimensions

mm [inches]



# Accessories for 18mm Sensors

## Right-angle Mounting Brackets

Mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 18mm sensors. Available with or without fixed insertion stop.

Accessories for 18mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#">OPT2104</a>	\$10.50	Wenglor mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 18mm sensors.	<a href="#">PDF</a>	0.06 [27.2]
<a href="#">OPT2105</a>	\$10.50	Wenglor mounting bracket, right-angle, plastic. For use with 18mm sensors.	<a href="#">PDF</a>	0.06 [27.2]



[OPT2104](#), [OPT2105](#)

## Right-angle Swivel Mounting Systems

Mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 12mm rod mount. For use with 18mm sensors. Available in all 304 stainless steel or with an aluminum head and a stainless steel mounting plate.

Accessories for 18mm Sensors						
Part Number	Price	Description	Mounting Head	Mounting Plate	Drawing Link	Weight lb [g]
<a href="#">OPT2116</a>	\$11.50	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, aluminum, 12mm rod mount. For use with 18mm sensors.	Aluminum	304 Stainless steel	<a href="#">PDF</a>	0.15 [68.0]
<a href="#">OPT2117</a>	\$21.00	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 304 stainless steel, 12mm rod mount. For use with 18mm sensors.	304 Stainless steel	304 Stainless steel	<a href="#">PDF</a>	0.28 [127.0]



[OPT2116](#), [OPT2117](#)

Note: 304 Stainless steel mounting rods sold separately: [OPT2109](#) (200mm [7.87 in] length), [OPT2110](#) (300mm [11.81 in] length), and [OPT2111](#) (500mm [19.69 in] length).

# Mounting Rods and Brackets

## Mounting Rods

304 Stainless steel rods for mounting swivel brackets [OPT2112](#) - [OPT2127](#). Available in three lengths: 200mm, 300mm, and 500mm. 12mm diameter.

Mounting Rods for OPT2112-2127 Swivel Mounting Brackets				
Part Number	Price	Description	Drawing Link	Weight lb (g)
<a href="#">OPT2109</a>	\$13.00	Wenglor mounting rod, 12mm diameter, 200mm length, 304 stainless steel.	<a href="#">PDF</a>	0.41 [185.97]
<a href="#">OPT2110</a>	\$16.00	Wenglor mounting rod, 12mm diameter, 300mm length, 304 stainless steel.	<a href="#">PDF</a>	0.60 [272.16]
<a href="#">OPT2111</a>	\$21.00	Wenglor mounting rod, 12mm diameter, 500mm length, 304 stainless steel.	<a href="#">PDF</a>	0.98 [444.52]



## Right-angle Mounting Bracket

Mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods [OPT2109](#), [OPT2110](#) & [OPT2111](#).

Right-angle Mounting Brackets for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#">OPT2108</a>	\$16.00	Wenglor mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods OPT2109, OPT2110 & OPT2111.	<a href="#">PDF</a>	0.07 [31.8]

