AT Series Inductive Proximity Sensors



M30 (30mm) metal - DC

- Standard and extended distance models available
- 2-wire and 3-wire models
- Axial cable or M12 quick-disconnect models
- LED status indicators are visible 360° around the cylinder
- Complete overload protection
- IP67 rated
- · Lifetime warranty



AT Series M30 DC Inductive Proximity Selection Chart								
Part Number	Price	Sensing Range	Mounting	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
AT1-AN-1A	\$24.00				NPN	2m [6.5 ft] axial cable	Diagram 1	Figure 1
AT1-AP-1A	\$24.00		Flush		PNP	2m [6.5 ft] axial cable	Diagram 1	Figure 1
AT1-A0-1A	\$39.00	10mm [0.394 in]		N.O.	Sink/source	2m [6.5 ft] axial cable	Diagram 2	Figure 1
<u>AT1-AN-1H</u>	\$25.00	1011111 [0.394 111]	Flusii	N.O.	NPN	M12 [12mm] connector	Diagram 1	Figure 2
<u>AT1-AP-1H</u>	\$25.00				PNP	M12 [12mm] connector	Diagram 1	Figure 2
AT1-A0-1H	\$44.50				Sink/source	M12 [12mm] connector	Diagram 2	Figure 2
AT1-AN-2A	\$24.00				NPN	2m [6.5 ft] axial cable	Diagram 1	Figure 1
AT1-AP-2A	\$24.00		Non-flush		PNP	2m [6.5 ft] axial cable	Diagram 1	Figure 1
AT1-A0-2A	\$39.00	15 mm [0 501 in]		N.O.	Sink/source	2m [6.5 ft] axial cable	Diagram 2	Figure 1
<u>AT1-AN-2H</u>	\$25.00	15mm [0.591 in]			NPN	M12 [12mm] connector	Diagram 1	Figure 2
<u>AT1-AP-2H</u>	\$25.00				PNP	M12 [12mm] connector	Diagram 1	Figure 2
AT1-A0-2H	\$44.50				Sink/source	M12 [12mm] connector	Diagram 2	Figure 2
Extended Distance								
AT1-AN-3A	\$30.00			N.O.	NPN	2m [6.5 ft] axial cable	Diagram 1	Figure 1
AT1-AP-3A	\$30.50				PNP	2m [6.5 ft] axial cable	Diagram 1	Figure 1
AT1-A0-3A	\$43.50	15mm [0.591 in]	Fluck		Sink/source	2m [6.5 ft] axial cable	Diagram 2	Figure 1
AT1-AN-3H	\$30.50	[111 1 86.0] 11111161	Flush		NPN	M12 [12mm] connector	Diagram 1	Figure 2
AT1-AP-3H	\$30.50				PNP	M12 [12mm] connector	Diagram 1	Figure 2
AT1-A0-3H	\$43.50				Sink/source	M12 [12mm] connector	Diagram 2	Figure 2
AT1-AN-4A	\$30.50				NPN	2m [6.5 ft] axial cable	Diagram 1	Figure 1
AT1-AP-4A	\$30.50			N.O.	PNP	2m [6.5 ft] axial cable	Diagram 1	Figure 1
AT1-A0-4A	\$43.50	20mm [0 707 :-1	Non-flush		Sink/source	2m [6.5 ft] axial cable	Diagram 2	Figure 1
AT1-AN-4H	\$30.50	20mm [0.787 in]			NPN	M12 [12mm] connector	Diagram 1	Figure 2
AT1-AP-4H	\$30.50				PNP	M12 [12mm] connector	Diagram 1	Figure 2
AT1-A0-4H	\$43.50				Sink/source	M12 [12mm] connector	Diagram 2	Figure 2

Dimensions

mm[inches]


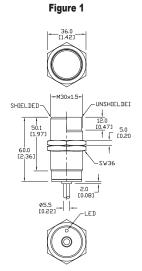


Figure 2




AT Series Inductive Proximity Sensors

AT Series M30 DC Inductive Proximity Specifications								
Manusius Tura	Standard Dis	tance Models	Extended Distance Models					
Mounting Type	Flush	Non-flush	Flush	Non-flush				
Nominal Sensing Distance	10mm [0.394 in]	15mm [0.591 in]	15mm [0.591 in]	20mm [0.787 in]				
Operating Distance		N	A					
Material Correction Factors		See the Materia	l influence table					
Output Type	Three wire:	NPN or PNP/N.O. (normally	open) / Two wire: sink/sourc	e, N.O. only				
Operating Voltage		10 to 3	0 VDC					
No-load Supply Current		≤ 20	mA					
Operating (Load) Current	3 wire: ≤ 400mA	/ 2-wire: 3-100mA	2-wire and 3-	wire:≤ 400mA				
Off-state (Leakage) Current	3-wire:≤ 10µA / 2-\	wire: ≤ 0.8mA max.	3 -wire ≤ 8μ A / 2 -v	vire: ≤ 0.8mA max.				
Voltage Drop	3-wire: ≤ 1 volt max.	/ 2-wire: ≤2.8V≤10%	3-wire: ≤1 volt max. / 2-wire: ≤ 2.8 V					
Switching Frequency	3-wire: 200Hz	/ 2-wire: 150Hz	2-and 3-wire:150Hz					
Differential Travel	2 to 10%		2 to 15%		2 to 15%			
Repeat Accuracy	3-wire: 2%	/ 2-wire: 5%	2-wire and 3-wire: 5%					
Ripple		≤10	10%					
Time Delay Before Availability (tv)	3-wire: 100ms	/ 2-wire: 50ms	3-wire:100ms / 2-wire: 50ms					
Reverse Polarity Protection		Ye	es					
Short-Circuit Protection		Yes [switch auto-resets a	fter overload is removed]					
Operating Temperature		-25 to + 70°C [-13 to	158°F]; drift: 10% Sr					
Protection Degree (DIN 40050)	IEC IP67							
Indication/Switch Status		Yellow [N.O. ou	tput energized]					
Housing Material		Nickel-pla	ted brass					
Sensing Face Material		Polybutylene Ter	ephthalate [PBT]					
Shock/Vibration		See Proximity Se	nsor Terminology					
Tightening Torque		50 Nm [36	5.88 lbs-ft]					
Weight		A type [w/ cable]: 180g [6.35	oz] H type: 110g [3.88 oz					
Connection		2 meter [6.5 ft] axial ca	able or M12 connector					
Agency Approvals	NA							

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Wiring diagrams

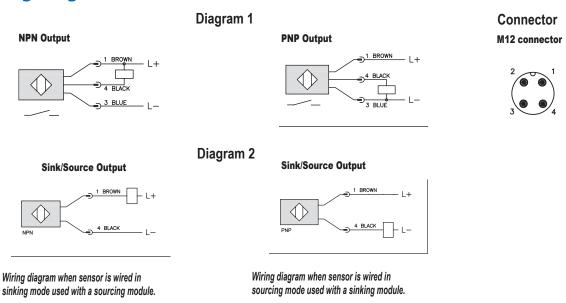

Note: Negative (-) lead is Black on M12 quick- disconnect cables and Blue on axial cables.

Accessories for 30mm Sensors


Axial Mounting Bracket

Mounting bracket, axial, zinc-plated steel. For use with 30mm sensors. Has two mounting holes (use 5mm screws) and allows the rotation of an optical axis for right-beam-angle-adapter sensors. Hexagonal nuts not included.

Accessories for 30mm Sensors						
Part Number	Price	Description	Weight lb [g]			
<u>ST30A</u>	\$2.25	Micro Detectors mounting bracket, axial, zinc plated steel. For use with 30mm sensors.	0.18 [81.7]			

Dimensions

mm [inches]

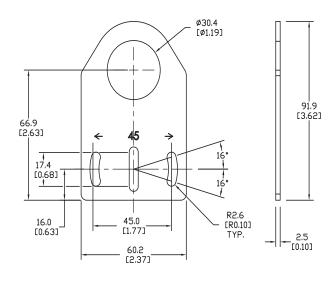




Right-angle Mounting Bracket

Mounting bracket, right-angle, zinc-plated steel. For use with 30mm sensors. Has two mounting holes (use 5mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal nuts not included.

Accessories for 30mm Sensors						
Part Number	Part Number Price Description					
ST30C	\$2.25	Micro Detectors mounting bracket, right-angle, zinc plated steel. For use with 30mm sensors.	0.18 [81.7]			

Dimensions

mm [inches]

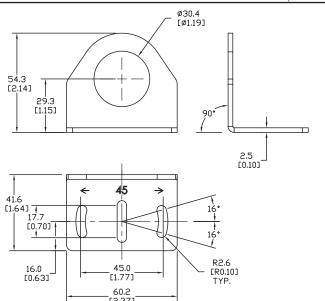




Accessories for 30mm Sensors

Right-angle Mounting Bracket

Mounting bracket, right-angle, 304 stainless steel. For use with 30mm sensors.

Accessories for FW Series Sensors						
Part Number Price Description			Weight lb [g]			
<u>ST30C6W</u>	\$5.50	AutomationDirect mounting bracket, right-angle, 304 stainless steel. For use with 30mm sensors.	0.15 (68.0)			

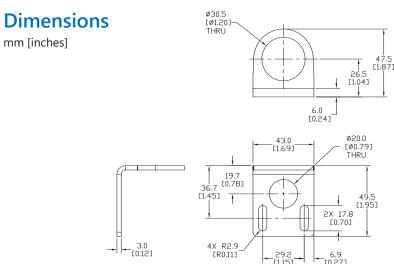



ST30C6W

Right-angle Swivel Mounting Systems

Mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 12mm rod mount. For use with 30mm sensors. Available in all 304 stainless steel or with an aluminum head with a 304 stainless steel mounting plate.

	Accessories for 30mm Sensors									
Part Number	Price	Description	Mounting Head	Mounting Plate	Drawing Link	Weight Ib [g]				
<u>OPT2118</u>	\$11.50	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, aluminum, 12mm rod mount. For use with 30mm sensors.	Aluminum	304 Stainless steel	<u>PDF</u>	0.18 [81.7]				
<u>OPT2119</u>	\$21.00	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 304 stainless steel, 12mm rod mount. For use with 30mm sensors.	304 Stainless Steel	304 Stainless steel	<u>PDF</u>	0.18 [81.7]				

Note: 304 Stainless steel mounting rods sold separately: <u>OPT2109</u> (200mm [7.87 in] length), <u>OPT2110</u> (300mm [11.81 in] length), and <u>OPT2111</u> (500mm [19.69 in] length).



OPT2118, OPT2119

Mounting Rods and Brackets

Mounting Rods

304 Stainless steel rods for mounting swivel brackets <u>OPT2112</u> - <u>OPT2127</u> Available in three lengths: 200mm, 300mm, and 500mm. 12mm diameter.

M	Mounting Rods for OPT2112-2127 Swivel Mounting Brackets								
Part Number	Price	Description	Drawing Link	Weight lb (g)					
<u>OPT2109</u>	\$13.00	Wenglor mounting rod, 12mm diameter, 200mm length, 304 stainless steel.	PDF	0.41 [185.97]					
<u>OPT2110</u>	\$16.00	Wenglor mounting rod, 12mm diameter, 300mm length, 304 stainless steel.	PDF	0.60 [272.16]					
<u>OPT2111</u>	\$21.00	Wenglor mounting rod, 12mm diameter, 500mm length, 304 stainless steel.	<u>PDF</u>	0.98 [444.52]					



Right-angle Mounting Bracket

Mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods OPT2109, OPT2110 & OPT2111.

Right-angle Mounting Brackets for 12mm Sensors								
Part Number Price Description		Drawing Link	Weight Ib [g]					
<u>OPT2108</u>	\$16.00	Wenglor mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods OPT2109, OPT2110 & OPT2111.	<u>PDF</u>	0.07 [31.8]				



www.automationdirect.com