

Single and double-level DN-QEMXxx screwless plug-in terminal blocks with spring terminals accept all DN-xxPLUG Euro plugs. These terminal blocks are 35mm DIN-rail mountable.

Screwless Plug-In Terminal Blocks



Ordering Information									
		Part Number	Qty	Price	Part Number	Qty	Price		
Gray Termin	al Block	DN-QEMXM1	32	\$63.00	DN-QEMXDV	32	\$81.00		
		Technical	Speci	ficatio	ns				
Stripping Le	ength	8mm [0.	.31 in]		8r	nm [0.31 in]		
Levels		Single	Level		D	ouble Leve			
UL Approva	I *			1-12 AWG		1A**	24-12 AWG		
Operating T	emperature				e: -20°C to 105°C [-4°F it 40°C [104°F]; 90% m		[68°F]		
SCCR Ratin	g	10kA per Table	e SB4.1, 20	009, UL 508	BA, maximum SCCR for	unmarked	components		
CE Conform	nity		(CE (EN 60	947-1 / EN 60947-7-1)				
Agency File	#				JL E179129				
		Acc	essori	es					
End Cover	left (open) side	DN-EMXM1EC1	25	\$15.00	DN-EMXDVEC1	25	\$15.00		
Ena Cover	right (closed) side	DN-EMXM1EC2	25	\$15.00	DN-EMXDVEC2	25	\$15.00		
Spacer	either side	DN-EMXM1SPA1	25	\$13.00	DN-EMXM1SPA1	25	\$13.00		
	2-pole	DN-2J2Y	100	\$43.00	DN-2J2Y	100	\$43.00		
		DN-2J2YMN	25	\$13.00	DN-2J2YMN	25	\$13.00		
Jumpers	3-pole	<u>DN-3J2Y</u>	100	\$62.00	<u>DN-3J2Y</u>	100	\$62.00		
	3-роте	DN-3J2YMN	25	\$18.00	DN-3J2YMN	25	\$18.00		
	24-pole	<u>DN-24J2Y</u>	5	\$28.00	<u>DN-24J2Y</u>	5	\$28.00		
Jumper Cut	ting Tool	DN-J2CUT	1	\$79.00	DN-J2CUT	11	\$79.00		
Pin Protecto	or – 4-pole	DN-EMPEG1 ***	16	\$4.00	DN-EMPEG1 ***	16	\$4.00		
	7.5 mm	DN-R35S1	10	\$39.00	<u>DN-R35S1</u>	10	\$39.00		
35mm	high	DN-R35S1-2	2	\$11.00	DN-R35S1-2	2	\$11.00		
DIN Rail	15mm	<u>DN-R35HS1</u>	10	\$68.00	<u>DN-R35HS1</u>	10	\$68.00		
	high	DN-R35HS1-2	2	\$16.50	DN-R35HS1-2	2	\$16.50		
		<u>DN-EB35</u>	50	\$67.00	<u>DN-EB35</u>	50	\$67.00		
		DN-EB35MN	20	\$31.50	DN-EB35MN	20	\$31.50		
End Bracker	•	<u>DN-EB35-A</u>	50	\$47.50	<u>DN-EB35-A</u>	50	\$47.50		
Liia Diacke		DN-EB35-A-10	10	\$12.00	DN-EB35-A-10	10	\$12.00		
		DN-QEB35	50	\$42.50	DN-QEB35	50	\$42.50		
		DN-QEB35-10	10	\$11.50	DN-QEB35-10	10	\$11.50		
Angled Sup	port Bracket	DN-ASB1	50	\$107.00	DN-ASB1	50	\$107.00		
Marking Tag	ıs	DN-LA, DN-LT, DN-EMLBL series	500/100	various	DN-LA, DN-LT, DN-EMLBL series	500/100	various		



EURO XM1/2V 2.5/35



(4) DN-QEMXM1 with (2) DN-4PLUG




(4) DN-QEMXDV **EURO XDV 2.5/35**




(4) **DN-QEMXDV** with (2) DN-4PLUG

DN-QEMXM1







	0 mm
--	------

Term	inal Plugs Ratings
Voltage/ Current	300V, 12A
Wire Gauge	14–22 AWG, CU only
Torque	Tightening Torque: 0.51 N·m [4.5 lb-in]
Operating Temperature	Ambient air temp: -20 to 105°C [-4 to 221°F] Relative humidity: 50% max at 40°C [104°F]; 90% max at 20°C [68°F]
Agency Approvals	UL file #: E179129

Note: For more information on accessories, see the DINnectors Accessories section of this section.

Accessories – Terminal Plugs											
*Part Number	Number of Poles	Length in [mm]	Qty	Price	*Part Number	Number of Poles	Length in [mm]	Qty	Price		
DN-2PLUG	2	0.40	200	\$115.00	DN-8PLUG	8	1.60	50	\$117.00		
DN-2PLUGMN		[10.2]	10	\$7.25	DN-8PLUGMN	0	[40.6]	5	\$14.50		
DN-3PLUG	3	0.60	200	\$177.00	DN-9PLUG	9	1.80	50	\$128.00		
DN-3PLUGMN	٥	[15.2]	10	\$11.50	DN-9PLUGMN	9	[45.7]	5	\$15.00		
DN-4PLUG	4	0.80	100	\$118.00	DN-10PLUG	10	2.00	50	\$136.00		
DN-4PLUGMN	4	[20.3]	10	\$14.50	DN-10PLUGMN	10	[50.8]	5	\$17.00		
DN-5PLUG	_	1.00	100	\$136.00	DN-11PLUG	44	2.20	50	\$161.00		
DN-5PLUGMN	5	[25.4]	10	\$18.00	DN-11PLUGMN	11	[55.9]	5	\$19.50		
DN-6PLUG	_	1.20	100	\$176.00	DN-12PLUG	10	2.40	50	\$176.00		
DN-6PLUGMN	6	[30.5]	10	\$18.00	DN-12PLUGMN	12	[61.0]	5	\$20.00		
DN-7PLUG	7	1.40	50	\$92.00							
DN-7PLUGMN	7	[35.6]	5	\$14.50							

^{*} DN-xxPLUGs fit all DN-EMXxx & DN-QEMXxx plug-in terminal blocks.

^{*}For copper wire only **DN-QEMXDV rated 12A for stranded wire; 11A for solid wire

^{***}DN-EMPEG1 each piece covers and protects up to 4 unused pins

Screwless Terminal Blocks Overview

Why go screwless?

Screwless clamping technology offers several benefits:


- Speed: On average, screwless connections can be made in half the time of screw type connections, cutting installation labor costs in half.
- Ease: No need for twisting and turning screws, so screwless terminal blocks are much easier on the installer's hands and arms. Also, wiring from the top of the terminal blocks allow installers to accurately and reliably see the wire fully inserted into the spring clamp.
- Safety: Never have a problem with faulty connections from loose screws again! Meets the same UL, and IEC standards as screwtype terminal blocks.
- Maintenance-free: The screwless spring clamp conforms to the wire with constant tension, making it maintenance-free.

Are there any trade-offs of going screwless versus screw-type?

Unless you need to clamp multiple wires to the same connection point, the answer is no. If you do, then there may be a slight trade-off in requiring more panel space than with screw terminal blocks. Unlike screw terminal blocks, screwless terminal block spring-clamps are designed to clamp a single wire, only. This is why multiple versions exist like the "one-to-two" or "two-to-two." These versions allow multiple wires to be connected together via multiple spring clamps.

How does it work?

Well, it's pretty simple: Push, Insert, Release. Just push your screwdriver into the spring clamp (a rectangular shaped hole) to open the spring clamp; insert the stripped wire into the clamp a circular shaped hole), and pull out your screwdriver to release the clamp against the wire. That's it. The connection is made.

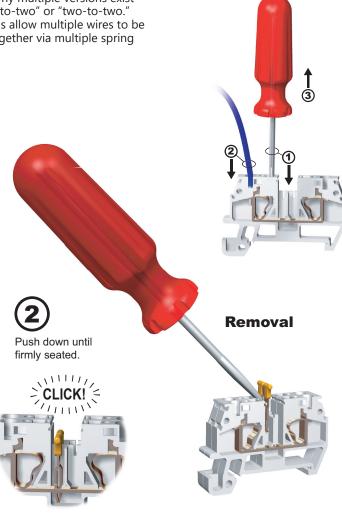


How do the jumpers work?



Properly align jumper bar with terminal block center jumper slots.





Yes = Good, acceptable jumper No = Bad, damaged jumper


Steel DIN Rails Features

35mm wide

- Available in 1-meter lengths
- 7.5 mm-high rails primarily used to mount terminal blocks, relays, timers and small PLCs such as the BRX, CLICK, DirectLogic and Productivity series. 15mm-high rails for mounting larger and heavier components such as contactors and larger PLCs

15mm wide

- Available in 1-meter lengths
- DN-R15S1 exclusively for mounting mini terminal blocks such as the DN-M10-A

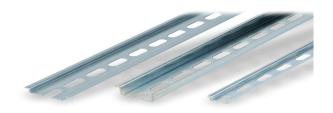

	Steel DIN Rails Specifications										
	Part Number	Qty	Price	Part Number	Qty	Price	Part Number	Qty	Price		
DIN Rail	DN-R35S1	10	\$39.00	DN-R35HS1	10	\$68.00	DN-R15S1	10	\$36.00		
DIN Kali	DN-R35S1-2	2	\$11.00	DN-R35HS1-2	2	\$16.50	DN-R15S1-2	2	\$10.00		
Description	DINnector DIN rail, slotted, 35mm width, 7.5mm height, 1m length, plated steel. Package of 10.			DINnector DIN rail, slotted, 35mm width, 15mm height, 1m length, plated steel. Package of 10.			DINnector DIN rail, slotted, 15mm width, 5.5mm height, 1m length, plated steel. Package of 2.				
Plating				Zinc-plated an	d chrom	ated					
International Standards				EN 6071	5, RoHs						
Suggested Mounting Screw Type	M	6		M6			M4				

Aluminum DIN Rail Features

35mm wide

- Non-anodized finish
- Zinc plating and passivation (minimum thickness 6 microns)
- Lightweight, easy to cut and deburr
- · Terminal blocks only
- Maximum mounting screw #10-32 or M5
- Available in 1-meter lengths

35mm wide raised

- Non-anodized finish
- Zinc plating and passivation (minimum thickness 6 microns)
- Enables users to raise terminal blocks 21/4" above the back panel
- · Terminal blocks only
- Available in 1-meter lengths
- Bushing or grommet recommended for wire access hole (example Heyco UB-875 not sold by ADC)



Aluminum DIN Rails Specifications										
	Part Number	Qty	Price	Part Number	Qty	Price				
DIN Rail	DN-R35SAL1	10	\$60.00	DN B250AL2.2	2	\$38.00				
DIN Rall	DN-R35SAL1-2	2	\$16.00	<u>DN-R35SAL2-2</u>	2	\$38.00				
Description	DIN <i>nector</i> DIN rail, slotted height, 1m length, alumir			DIN <i>nector</i> DIN rail, slot 7.5mm height, 1m leng						
Plating		Galva	nic zinc plati	ng, non-anodized finish						
International Standards			DIN 50	960, RoHs						
Suggested Mounting Screw Type			#10-	32 or M5						

DIN rail support brackets

- Angled support brackets raise and tilt mounting rails 30 degrees from mounting surface for easier wiring
- <u>DN-ASB1</u> plated steel support bracket
- DN-ASB2-10 cold-rolled steel treated with galvanic zinc plating and passivation

DIN rail mounting clips

- Snap small devices not made for mounting onto 35mm DIN rails
- · Zinc plated steel


	DIN Rail Support Brackets and Mounting Clips		
Part Number	Description	Qty	Price
DN-ASB1	30°angled DIN rail support bracket (M6-1.0 screws not included)	50	\$107.00
DN-ASB2-10	30°angled DIN rail support bracket (M6-1.0 screws included)	10	\$18.00
DN-SSB25-10	1" (25mm) DIN rail support bracket (M6-1.0 screws included)	10	\$24.50
DN-SSB50-10	2" (50mm) DIN rail support bracket (M6-1.0 screws included)	10	\$25.50
DN-SSB70-10	2.75" (70mm) DIN rail support bracket (M6-1.0 screws included)	10	\$32.00
DN-SSB90-10	3.5" (90mm) DIN rail support bracket (M6-1.0 screws included)	10	\$34.50
DN-CLIP-FM4	DN -1	40	\$66.00
DN-CLIP-FM4-5	DIN rail mounting clip with M4 x 0.7 mm threaded hole (Screws not included)	5	\$9.50
DN-CLIP-FM5	DN of an affective the ME 00 and band date (0 an artist date)	40	\$66.00
DN-CLIP-FM5-5	DIN rail mounting clip with M5 x 0.8 mm threaded hole (Screws not included)	5	\$9.50





DIN Rail Support Brackets and Mounting Clips

Dimensions

mm [inches]

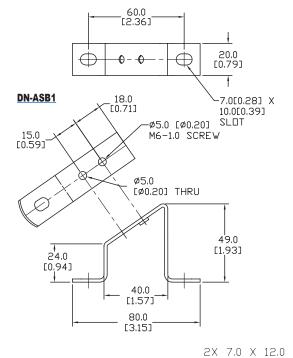


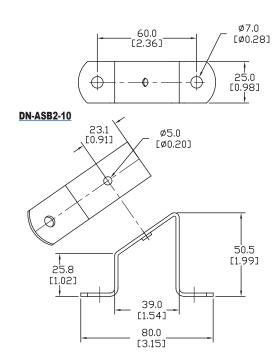


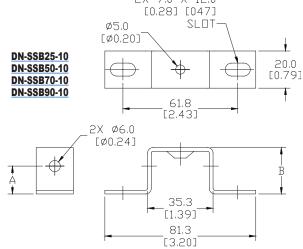

DIN Rail Support Brackets									
Part Number	DIM A mm [inches]	DIM B mm [inches]							
DN-SSB25-10	15.0 [0.59]	25.0 [0.98]							
DN-SSB50-10	40.0 [1.58]	50.0 [1.97]							
DN-SSB70-10	60.0 [2.36]	70.0 [2.76]							
DN-SSB90-10	80.0 [3.15]	90.0 [3.54]							

See our website: <u>www.AutomationDirect.com</u> for complete engineering drawings

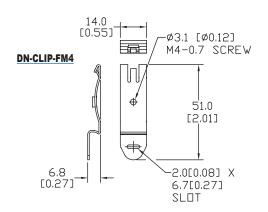

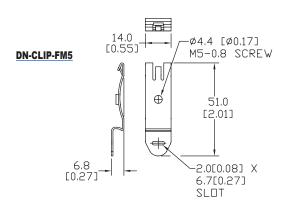

Jumpers

Multi-pole jumper bars for DINnector terminal blocks




DN-12JL14B-A

Multi-pole Jumper Bars										
			# of	Rati			Insulation	For Use With		
Part Number	Qty	Price	# 01 Poles	(V)	(A)	Tightening Torque	Insulation Color	Terminal Block Series		
Screw-down Connecti	on				,					
<u>DN-2J6</u>	100	\$76.00	2	600	65		-			
DN-3J6	100	\$132.00	3	600	65	0.5 Nm [4.4 Lb-ln]	_	DN-T6		
<u>DN-4J6</u>	100	\$169.00	4	600	65	[[5-11]	_	<u> </u>		
<u>DN-55J6</u>	1	\$26.50	55	600	65		_			
<u>DN-24J8</u>	5	\$41.00	24	600	50	0.6 Nm [5.3 lb-in]	Green	<u>DN-T8</u>		
Push-in Connection										
DN-2J2Y	100	\$43.00	2	600	25		Orange	DN-T12-A		
DN-2J2YMN	25	\$13.00	2	600	25		Orange	DN-EMX		
DN-3J2Y	100	\$62.00	3	600	25		Orange	<u>DN-Q12-A</u> DN-QD12-A		
DN-3J2YMN	25	\$18.00	3	600	25		Orange	DN-QEMX		
<u>DN-24J2Y</u>	5	\$28.00	24	600	25		Orange	DN-QKBD12-A		
DN-2J4Y	100	\$46.00	2	600	25		Yellow			
DN-2J4YMN	25	\$14.50	2	600	25		Yellow	DN-T10-A		
<u>DN-3J4Y</u>	100	\$74.00	3	600	25		Yellow	<u>DN-D10-A</u> DN-M10-A		
DN-3J4YMN	25	\$22.00	3	600	25		Yellow	DN-Q10-A		
<u>DN-24J4Y</u>	5	\$29.50	24	600	25		Yellow			
<u>DN-2JL14-A</u>	100	\$67.00	2	300	20		Red			
DN-2JL14-AMN	25	\$15.00	2	300	20		Red			
<u>DN-2JL14B-A</u>	100	\$67.00	2	300	20		Blue			
DN-2JL14B-AMN	25	\$15.00	2	300	20	_	Blue			
DN-3JL14-A	100	\$99.00	3	300	20		Red	DN-TL-A		
DN-3JL14-AMN	25	\$23.00	3	300	20		Red	DIN-TL-A		
<u>DN-3JL14B-A</u>	100	\$99.00	3	300	20		Blue			
DN-3JL14B-AMN	25	\$23.00	3	300	20		Blue			
DN-12JL14-A	10	\$26.50	12	300	20		Red			
DN-12JL14B-A	10	\$26.50	12	300	20		Blue			
DN-12JFE	10	\$60.00	12	300	25		Blue	DN-FE4		
DN-2J6Y	100	\$60.00	2	600	30		Green	DN-Q8-A		
DN-2J6YMN	25	\$15.00	2	600	30		Green			
DN-3J6Y	100	\$84.00	3	600	30		Green	DN-Q8-A		
DN-3J6YMN	25	\$23.50	3	600	30		Green			
DN-12J6Y	10	\$35.50	12	600	30		Green	DN-Q8-A		


Dimensions

mm [inches]


DN-24J8




DN-xJ2Y / DN-xJ2YMN




DN-xJ4Y / DN-xJ4YMN




DN-xJL14 / DN-xJL14x-AMN, DN-xJ14x-A



DN-12JFE




DN-xJ6Y / DN-xJ6YMN



Modifying a DN-24J8 jumper bar to the required number of poles

- 1) Place the insulating part into the jumper bar and insert screws, based on number of poles required. (For instance, in the following example, 5 poles are required). Click into place.
- 2) Using a cutting tool, cut the insulating part at the edge of the jumper bar (see below).
- 3) Hold the metal jumper bar and insulating jumper with two hands, placing fingers to the left and right of the pole you wish to cut, repeatedly flexing up and down (1 or 2 times should be sufficient) until the jumper bar and insulating jumper break in two
- 4) Remove the small remaining piece of jumper (see below). This is important to ensure appropriate insulation distance in the case of contiguously applied jumpers in sequence. This step also facilitates the placement of a separator terminal if the bridge is positioned as the last terminal of a group.
- 5) The jumpers now are ready to be screwed onto <u>DN-T8</u> series terminal blocks.

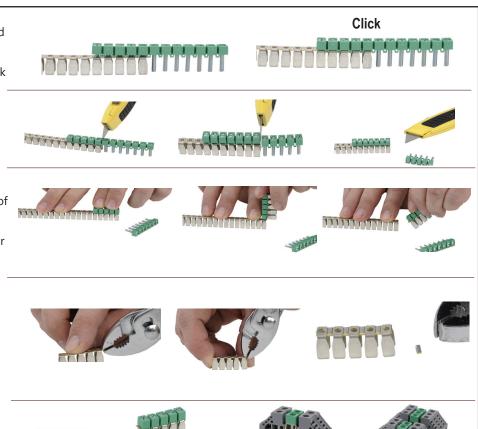

Jumper Cutting Tools

Jumper cutting tools maintain protective covering.

	Jumper Cutting Tools		
Part Number	Description	Qty	Price
DN-J2CUT	DINnector jumper cutting tool, for use with DN-2J2Y, DN-3J2Y and DN-24J2Y jumpers.	1	\$79.00
DN-J4CUT	DINnector jumper cutting tool, for use with DN-2J4Y, DN-3J4Y and DN-24J4Y jumpers.	1	\$79.00
DN-J6CUT	DINnector jumper cutting tool, for use with DN-12J6Y jumpers.	1	\$118.00
DN-JL14CUT	DINnector jumper cutting tool, for use with DN-12JL14-A and DN-12JL14B-A jumpers.	1	\$112.00
DN-JXCUT	DINnector jumper cutting tool, for use with DN-J2DIE, DN-J4DIE, DN-J6DIE, DN-JL14DIE and DN-JFEDIE dies.	1	\$76.00
DN-JFECUT	DINnector jumper cutting tool, for use with DN-12JFE jumpers.	1	\$92.00
<u>DN-JKIT</u>	DIN <i>nector</i> cutting tool kit for DN series jumpers. Includes (1) DN-JXCUT cutting tool, (5) dies (DN-J2DIE, DN-J4DIE, DN-J6DIE, DN-JL14DIE, and DN-JFEDIE).	1	\$313.00
DN-TOOL2	DINnector tool kit, for use with DN series terminal blocks, includes (1) spring opening tool for DN-Q series screwless terminal blocks and (1) jumper removal tool for J2, J4, J6, and JL14 jumpers.	1	\$11.50

Replacement Dies								
Part Number	Description	Price						
DN-J2DIE	DINnector die set, replacement. Package of 2. For use with jumper cutting tools DN-J2CUT or DN-JXCUT.	\$118.00						
DN-J4DIE	DINnector die set, replacement. Package of 2. For use with jumper cutting tools DN-J4CUT or DN-JXCUT.	\$118.00						
DN-JFEDIE	DINnector die set, replacement. Package of 2. For use with jumper cutting tools DN-JFECUT or DN-JXCUT.	\$92.00						
DN-J6DIE	DINnector die set, replacement. Package of 2. For use with jumper cutting tools DN-J6CUT or DN-JXCUT.	\$118.00						
DN-JL14DIE	DINnector die set, replacement. Package of 2. For use with jumper cutting tools DN-JL14CUT or DN-JXCUT.	\$118.00						



DN-J2CUT



DN-J4CUT



DN-JKIT




DN-TOOL2

Terminal Plugs



DN-xxPLUG / DN-xxPLUGMN



		Acc	essories – Te	rminal	Plugs			
Plugs* Part Number	Qty	Price	Plugs* Part Number	Qty	Price	Number of Poles	Length mm [in]	
DN-2PLUG	200	\$115.00	DN-2PLUGMN	10	\$7.25	2	10.2 [0.40]	
DN-3PLUG	200	\$177.00	DN-3PLUGMN	10	\$11.50	3	15.2 [0.60]	
DN-4PLUG	100	\$118.00	DN-4PLUGMN	10	\$14.50	4	20.3 [0.80]	
DN-5PLUG	100	\$136.00	<u>DN-5PLUGMN</u>	10	\$18.00	5	25.4 [1.00]	
DN-6PLUG	100	\$176.00	DN-6PLUGMN	10	\$18.00	6	30.5 [1.20]	
DN-7PLUG	50	\$92.00	DN-7PLUGMN	5	\$14.50	7	35.6 [1.40]	
DN-8PLUG	50	\$117.00	DN-8PLUGMN	5	\$14.50	8	40.6 [1.60]	
DN-9PLUG	50	\$128.00	DN-9PLUGMN	5	\$15.00	9	45.7 [1.80]	
DN-10PLUG	50	\$136.00	DN-10PLUGMN	5	\$17.00	10	50.8 [2.00]	
DN-11PLUG	50	\$161.00	DN-11PLUGMN	5	\$19.50	11	55.9 [2.20]	
DN-12PLUG	50	\$176.00	<u>DN-12PLUGMN</u>	5	\$20.00	12	61.0 [2.40]	
Terminal Plugs I	Ratings							
Voltage/Curre	ent			300V, 1	2A			
Wire Gauge			1	4–22 AWG,	CU only			
Torque Tightening Torque: 0.51 N·m [4.5 lb·in]					o·in]			
Usage Temperature		Ambient air temperature: -20 to 105°C [-4 to 221°F] Relative humidity: 50% max at 40°C [104°F]; 90% max at 20°C [68°F]						
Agency Appro	ovals			UL file #: E1	79129			

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

^{*} DN-xxPLUGs fit all DN-EMXxx & DN-QEMXxx plug-in terminal blocks

DN-DIS-BLADE DN-DIS-BMN			
19.2 mm [0.77 in]	5.0 mm [0.20 in]		

Disconnect Blade


Disconnect Blade					
Part Number	Description	Qty	Price		
DN-DIS-BLADE	Terminal block disconnect blade for DN-FE2,	50	\$36.00		
DN-DIS-BMN	DN-FE4, DN-DIS2 and DN-DIS4	10	\$9.75		


End Brackets

26.9 mm [1.08 in]





	End Brackets			
Part Number	Description	Price		
DN-EB15	DINnector snap-on end bracket, 7mm wide. Package of 100. For use with 15mm DIN rail.	\$108.00		
DN-EB15MN	DINnector snap-on end bracket, 7mm wide. Package of 20. For use with 15mm DIN rail.	\$25.50		
DN-EB35	DINnector screw-down end bracket, 9mm wide. Package of 50. For use with 35mm DIN rail.	\$67.00		
DN-EB35MN	DINnector screw-down end bracket, 9mm wide. Package of 20. For use with 35mm DIN rail.	\$31.50		
DN-EB35-A	DINnector screw-down end bracket, 6mm wide. Package of 50. For use with 35mm DIN rail.	\$47.50		
DN-EB35-A-10	DINnector screw-down end bracket, 6mm wide. Package of 10. For use with 35mm DIN rail.	\$12.00		
DN-QEB35	DINnector snap-on end bracket, 6mm wide. Package of 50. For use with 35mm DIN rail.	\$42.50		
DN-QEB35-10	DINnector snap-on end bracket, 6mm wide. Package of 10. For use with 35mm DIN rail.	\$11.50		











For more information on accessories, see the "DINnectors Accessories" section of this section.

www.automationdirect.com

End Covers

Certain end covers can be used with multiple terminal block parts to cover and insulate the open side, or to put more space between adjacent blocks.

	DIN <i>nector</i> 's End Covers	
Part Number	Description	Price
DN-EC1210	DINnector terminal block end cover, gray. Package of 100. For use with DN-T12 or DN-T10 series terminal blocks.	\$43.00
DN-EC1210MN	DINnector terminal block end cover, gray. Package of 25. For use with DN-T12 or DN-T10 series terminal blocks.	\$14.50
DN-EC86	DINnector terminal block end cover, gray. Package of 100. For use with DN-T8 or DN-T6 series terminal blocks.	\$47.00
DN-EC86MN	DINnector terminal block end cover, gray. Package of 25. For use with DN-T8 or DN-T6 series terminal blocks.	\$14.50
DN-EC4	DINnector terminal block end cover, gray. Package of 50. For use with DN-T4 series terminal blocks.	\$29.50
DN-EC4MN	DINnector terminal block end cover, gray. Package of 10. For use with DN-T4 series terminal blocks.	\$5.75
DN-EC1/0	DINnector terminal block end cover, gray. Package of 50. For use with DN-T1/0 series terminal blocks.	\$33.50
DN-EC1/0MN	DINnector terminal block end cover, gray. Package of 10. For use with DN-T1/0 series terminal blocks.	\$8.00
DN-DEC10	DINnector terminal block end cover, gray. Package of 50. For use with DN-D10-A series terminal blocks.	\$31.50
DN-DEC10MN	DINnector terminal block end cover, gray. Package of 10. For use with DN-D10-A series terminal blocks.	\$6.00
DN-EC14	DINnector terminal block end cover, gray. Package of 25. For use with DN-TL14 series terminal blocks.	\$18.00
DN-EC14S	DINnector terminal block end cover, gray. Package of 25. For use with DN-TL14S series terminal blocks.	\$15.00
DN-ECM10	DINnector terminal block end cover, gray. Package of 100. For use with DN-M10-A series terminal blocks.	\$43.00
DN-ECM10MN	DINnector terminal block end cover, gray. Package of 25. For use with DN-M10-A series terminal blocks.	\$14.50
DN-ECKBD	DINnector terminal block end cover, gray. Package of 100. For use with DN-KBD12 series terminal blocks.	\$43.00
DN-ECKBDMN	DINnector terminal block end cover, gray. Package of 10. For use with DN-KBD12 series terminal blocks.	\$6.00
DN-EMXM1EC1	DINnector terminal block end cover, gray. Package of 25. For use with DN-EMXM1 series terminal block leftside.	\$15.00
DN-EMXM1EC2	DINnector terminal block end cover, gray. Package of 25. For use with DN-EMXM1 series terminal block rightside.	\$15.00
DN-EMXDVEC1	DINnector terminal block end cover, gray. Package of 25. For use with DN-EMXDV series terminal block leftside.	\$15.00
DN-EMXDVEC2	DINnector terminal block end cover, gray. Package of 25. For use with DN-EMXDV series terminal block rightside.	\$15.00
DN-FESEP	DINnector terminal block end cover, gray. Package of 50. For use with DN-FE and DN-DIS series terminal blocks.	\$26.50
DN-FESEP-10	DINnector terminal block end cover, gray. Package of 10. For use with DN-FE and DN-DIS series terminal blocks.	\$5.25
DN-QEC12	DINnector terminal block end cover, gray. Package of 50. For use with DN-Q12-A or DN-QG12 series terminal blocks.	\$21.50
DN-QEC12MN	DINnector terminal block end cover, gray. Package of 10. For use with DN-Q12-A or DN-QG12 series terminal blocks.	\$5.25
DN-QEC10	DINnector terminal block end cover, gray. Package of 50. For use with DN-Q10-A or DN-QG10 series terminal blocks.	\$21.50
DN-QEC10MN	DINnector terminal block end cover, gray. Package of 10. For use with DN-Q10-A or DN-QG10 series terminal blocks.	\$5.25
DN-QEC8	DINnector terminal block end cover, gray. Package of 50. For use with DN-Q8-A or DN-QG8 series terminal blocks.	\$25.50
DN-QEC8MN	DINnector terminal block end cover, gray. Package of 10. For use with DN-Q8-A or DN-QG8 series terminal blocks.	\$5.75
DN-QEC12-1-2	DINnector terminal block end cover, gray. Package of 25. For use with DN-Q12-1-2-A series terminal blocks.	\$15.00
DN-QEC12-2-2	DINnector terminal block end cover, gray. Package of 25. For use with DN-Q12-2-2-A series terminal blocks.	\$16.50
DN-QDEC12	DINnector terminal block end cover, gray. Package of 25. For use with DN-QD12 series terminal blocks.	\$16.50

Spacers

Spacers are used to put more space between adjacent blocks.


DIN <i>nector</i> s Spacers					
Part Number	Qty	Price			
DN-S1210	Spacer for <u>DN-T12-A</u> and <u>DN-T10-A</u> series	100	\$51.00		
DN-S1210MN	terminal blocks	25	\$16.00		
DN-S86	Spacer for <u>DN-T8</u> and <u>DN-T6</u> series terminal blocks		\$61.00		
DN-S86MN			\$14.00		
DN-EMXM1SPA1	Spacer for <u>DN-EMXM1</u> and <u>DN-QEMXM1</u> single-level plug-in terminal blocks		\$13.00		
DN-EMXDVSPA1	Spacer for <u>DN-EMXDV</u> and <u>DN-QEMXDV</u> double-level plug-in terminal blocks		\$14.50		
DN-FESPA	Spacer for DN-FE sockets and DN-DIS	50	\$26.50		
DN-FESPA-10	disconnects		\$5.25		


Top Covers


	DIN <i>nector</i> s Top Covers				
Part Number	Description	For Use With	Qty	Price	
DN-C12	Top cover, clear, printed	DN T40 A	100	\$62.00	
DN-C12MN	electrical symbol.	<u>DN-T12-A</u>	25	\$14.00	
DN-C10	Top cover, clear, printed	DN T40 A	100	\$62.00	
DN-C10MN	electrical symbol.	<u>DN-T10-A</u>	25	\$14.00	
DN-C86	Top cover, clear, printed	DN-T8	100	\$62.00	
DN-C86MN	electrical symbol.	DN-T6	25	\$14.00	
DN-DC10	Top cover, clear, printed	DN-D10	100	\$60.00	
DN-DC10MN	electrical symbol.	טו ט-אט	25	\$14.00	
DN-MC10	Top cover, clear, printed	DNI M40	100	\$64.00	
DN-MC10MN	electrical symbol.			25	\$14.00


DIN <i>nector</i> End Covers and Spacers Dimensions					
Part Number		Length mm[in]	Height mm [in]	Thickness mm [in]	
DN-EC1210	DN-EC1210MN	44 [1.73]	35 [1.38]		
<u>DN-S1210</u>	<u>DN-S1210MN</u>	55 [2.17]	44 [1.73]		
DN-EC86	DN-EC86MN	50 [1.97]	43 [1.69]		
DN-S86	DN-S86MN	55 [2.17]	49 [1.93]		
DN-EC4	DN-EC4MN	56 [2.21]	48 [1.89]		
DN-EC1/0	DN-EC1/0MN	62 [2.44]	60 [2.36]	1.5 [0.06]	
DN-DEC10	DN-DEC10MN	72 [2.80]	49 [1.93]		
DN-EC14	_	78 [3.08]	55 [2.17]		
DN-EC14S	_	55 [2.17]	50 [1.97]		
DN-ECM10	DN-ECM10MN	32 [1.26]	32 [1.26] 27 [1.06]		
DN-ECKBD	DN-ECKBDMN	52 [2.05]	34.5 [1.36]		
DN-EMXM1EC1	DN-EMXM1EC2				
DN-EMXDVEC1	DN-EMXDVEC2				
DN-EMXDVSPA1	DN-EMXM1SPA1		as shown on next page	;	
DN-FESPA	DN-FESPA-10				
DN-FESEP	DN-FESEP-10				
DN-QEC12	DN-QEC12MN	50 [1.97]	23 [0.9]		
DN-QEC10	DN-QEC10MN	57.4 [2.26]	33.6 [1.32]		
DN-QEC8	DN-QEC8MN	63 [2.48] 38.5 [1.52]			
DN-QEC12-1-2	_	68.5 [2.70] 28.5 [1.12] 1.5 [0.06]			
DN-QEC12-2-2	-	87.5 [3.44] 28.5 [1.12]			
DN-QDEC12	_	98 [3.86]	37 [1.46]		


 $\frac{\text{DN-EC1210}}{\text{DN-EC1/0}} \, (\text{MN}) \, \frac{\text{DN-EC36}}{\text{DN-ECKBD}} \, (\text{MN}), \, \frac{\text{DN-EC4}}{\text{DN-S1210}} \, (\text{MN}), \\ \frac{\text{DN-S86}}{\text{DN-S86}} \, (\text{MN})$






















Dimensional Drawings






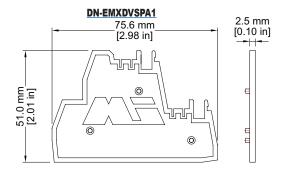

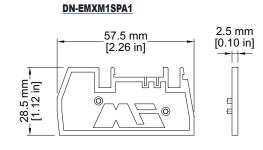

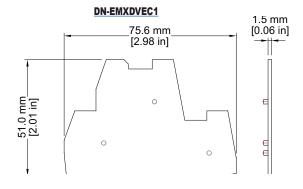


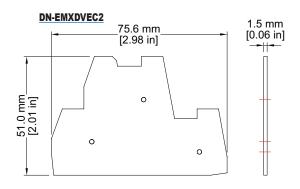

1.0 mm 55.0 mm [0.04 in] [2.17 in] 33.0 mm [1.30 in]

DN-FESEP.

DN-FESEP-10

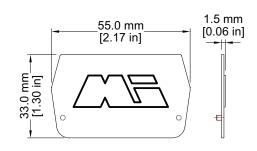

DN-FESPA, DN-FESPA-10

Marking Tags Cross Reference Charts - Screwless

DIN <i>nector</i> Marking Tags Cross Reference - Screwless					
Block Type	DN-QL	DN-LA	DN-LT	DN-EMLBL	
DN-Q12	Х	_	_	-	
DN-Q10	Х	-	-	-	
DN-Q8	Х	_	-	_	
DN-QD12	Х	_	-	_	
DN-Q12-1-2	Х	_	_	_	
DN-Q12-1-2L	Х	_	_	_	
DN-Q12-1-2D	Х	_	-	_	
DN-QKBD	Х	_	-	_	
DN-Q12-2-2	X	_	-	_	
DN-Q12-2-2L	X	_	_	_	
DN-Q12-2-2D	X	_	_	_	
DN-QEMXM1	_	X	X	X	
DN-QEMXDV	-	X	Х	X	
DN-QG12	Х	_	_	_	
DN-QG10	Х	_	_	_	
DN-QG8	Х	_	_	_	
DN-QG12-1-2	Х	_	_	_	
DN-QG12-2-2	X	_	_	_	



Accessories

Marking Tags


Marking Tags DN-L Series				
Part Number	Marking Sequence	Qty	Price	
DN-L50	1-50	500	\$56.00	
DN-L100	51-100	500	\$56.00	
DN-L150	101-150	500	\$56.00	
DN-L200	151-200	500	\$56.00	
DN-L250	201-250	500	\$56.00	
DN-L300	251-300	500	\$56.00	
DN-L350	301-350	500	\$56.00	
DN-L400	351-400	500	\$56.00	
DN-L450	401-450	500	\$56.00	
DN-LB	Blank	500	\$38.00	
DN-LS	L1, L2, L3, L, N, GND, +, -, COM,COM*	500	\$56.00	

Marking Tags DN-LA Series				
Part Number	Marking Sequence	Qty	Price	
DN-LA100	1-100	500	\$56.00	
DN-LA200	101-200	500	\$56.00	
DN-LA300	201-300	500	\$56.00	
DN-LA400	301-400	500	\$56.00	
DN-LAB	Blank Tags	500	\$56.00	
DN-LAS	L1, L2, L3, L, N, GND, +, -, COM,COM*	500	\$56.00	

Marking Tags DN-LAT Series					
Part Number	Marking Sequence	Qty	Price		
DN-LAT100-A	1-100	500	\$49.00		
DN-LAT200-A	101-200	500	\$49.00		
DN-LAT300-A	201-300	500	\$49.00		
DN-LAT400-A	301-400	500	\$49.00		
DN-LAT500-A	401-500	500	\$49.00		
DN-LAT600-A	501-600	500	\$49.00		
DN-LATB-A	Blank Tags	500	\$35.50		
DN-LATS-A	L1, L2, L3, L, N, +,-, COM,COM*	500	\$49.00		


Marking Tags DN-QL Series				
Part Number	Marking Sequence	Qty	Price	
DN-QL100	1-100	500	\$42.50	
DN-QL200	101-200	500	\$42.50	
DN-QL300	201-300	500	\$42.50	
DN-QL400	301.400	500	\$42.50	
DN-QL500	401-500	500	\$42.50	
DN-QLB	Blank Tags	500	\$36.00	
DN-QLS	L1, L2, L3, L, N, +,-, COM,COM*	500	\$49.00	

Dimensions



- The marking sequence of 50 tags (i.e. 101-150) is printed 10 times in each package of 500
- The DN-L tags fit all DIN*nectors* 6mm wide and wider.
- There will be a gap between tags on blocks wider than 6mm.
- Material: Thermoplastic with heat embossed black print.

Dimensions




- The marking sequence of 100 tags (i.e. 1-100) is printed five times in each package of 500.
- The DN-LA tags fit all DINnectors 5mm wide and wider. There will be a gap between tags on blocks wider than 5mm.
- Material: Thermoplastic with heat embossed black print.

Dimensions



- The marking sequence of 500 tags (i.e. 1-100) is printed five times in each package of 500.
- Material: Thermoplastic with heat embossed black print.

Dimensions



- The marking sequence of 500 (i.e. 1-100) is printed five times in each package of 500.
- Material: Thermoplastic with heat embossed black print.

Marking Tags continued


	Marking Tags DN-LT Series				
Part Number	Marking Sequence	Qty	Price		
DN-LT15	1-5	100	\$10.00		
<u>DN-LT60</u>	6-0	100	\$10.00		
DN-LT1	1	100	\$10.00		
DN-LT2	2	100	\$10.00		
DN-LT3	3	100	\$10.00		
DN-LT4	4	100	\$10.00		
DN-LT5	5	100	\$10.00		
DN-LT6	6	100	\$10.00		
DN-LT7	7	100	\$10.00		
DN-LT8	8 9	100	\$10.00		
DN-LT0	0	100 100	\$10.00 \$10.00		
DN-LTU DN-LTBLNK	Unprinted	100	\$10.00		
DN-LTBLNK DN-LTA	A	100	\$10.00		
DN-LTB	В	100	\$10.00		
DN-LTC	C	100	\$10.00		
DN-LTD	D	100	\$10.00		
DN-LTE	E	100	\$10.00		
DN-LTF	F	100	\$10.00		
DN-LTG	G	100	\$10.00		
<u>DN-LTH</u>	Н	100	\$10.00		
<u>DN-LTI</u>	I	100	\$10.00		
DN-LTJ	J	100	\$10.00		
DN-LTK	К	100	\$10.00		
<u>DN-LTL</u>	L	100	\$10.00		
DN-LTM	M	100	\$10.00		
<u>DN-LTN</u>	N	100	\$10.00		
-	-	- 400	- 000		
DN-LTP	P	100	\$10.00		
<u>DN-LTQ</u> <u>DN-LTR</u>	Q R	100	\$10.00 \$10.00		
DN-LTS	S	100	\$10.00		
DN-LTT DN-LTT	T	100	\$10.00		
DN-LTU	U	100	\$10.00		
DN-LTV	V	100	\$10.00		
DN-LTW	W	100	\$10.00		
DN-LTX	X	100	\$10.00		
DN-LTY	Υ	100	\$10.00		
DN-LTZ	Z	100	\$10.00		
DN-LTGND	⊕	100	\$10.00		
DN-LTPOS	+	100	\$10.00		
DN-LTNEG	-	100	\$10.00		
<u>DN-LTAC</u>	~	100	\$10.00		
<u>DN-LTDC</u>	=	100	\$10.00		



- These marking tags allow the flexibility of creating custom marking sequences on site.
- The DN-M series supports a maximum of three digits (tags), while other DINnectors support up to four digits (tags).
- Material: Thermoplastic with heat embossed black print.

DN-MTA marking tag adapter

DN-MTA dimensions



Part Number	Description		Price
DN-MTA	Marking tag adapter holds up to six DN-LT tags	50	\$14.50

Note: <u>DN-MTA</u> adapter does not fit <u>DN-T12-A</u> terminal blocks.

www.automationdirect.com

Terminal Marking Accessories








_

Part Number	Description	For Use With	Qty	Price	
DN-EMLBL1	Blank labels	DN-EMPEG1 pin protectors for DN-xEMXxx plug-in terminal blocks	100	\$9.25	
DN-EMLBL2	Labels printed 1 – 12		100	\$13.00	
DN-EMLBL3	Labels printed 13 – 24		100	\$13.00	

Marking Pen – for terminal and wire marking tags

- Permanent
- Smudge-proof
- Waterproof
- Weatherproof
- Lightfast (won't fade)
- Dries in seconds (excellent for left-handed users)
- Dry-safe (pen can be left uncapped for days without drying out)
- Low odor ink





Marking pen

Wire Marking Accessories



DN-WM-x wire tag holders

Part Number	Description	For Use With	Qty	Price
DN-WMTAG1	Wire tag – blank	all DN-WM-x wire tag holders	525	\$60.00
<u>DN-WM-1</u>	Wire tag holder, clear, 12mm length, 0.051–0.118 in diameter; for 22–16 AWG wire	DN-WMTAG1	200	\$12.50
DN-WM-2	Wire tag holder, clear, 12mm length, 0.098–0.196 in diameter; for 16-11 AWG wire		200	\$12.50
DN-WM-3	Wire tag holder, clear, 12mm length, 0.157–0.393 in diameter; for 13–5 AWG wire		100	\$8.25
DN-WM-4	Wire tag holder, clear, 12mm length, 0.314–0.629 in diameter; for 5AWG wire		100	\$7.75